
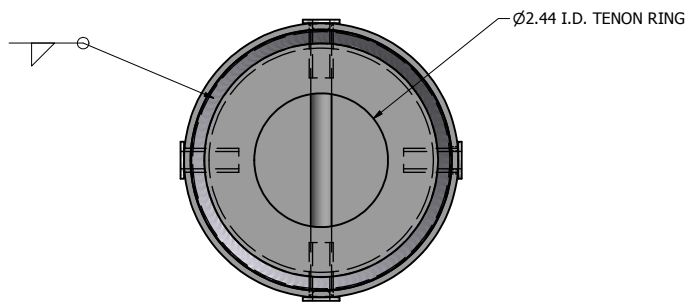
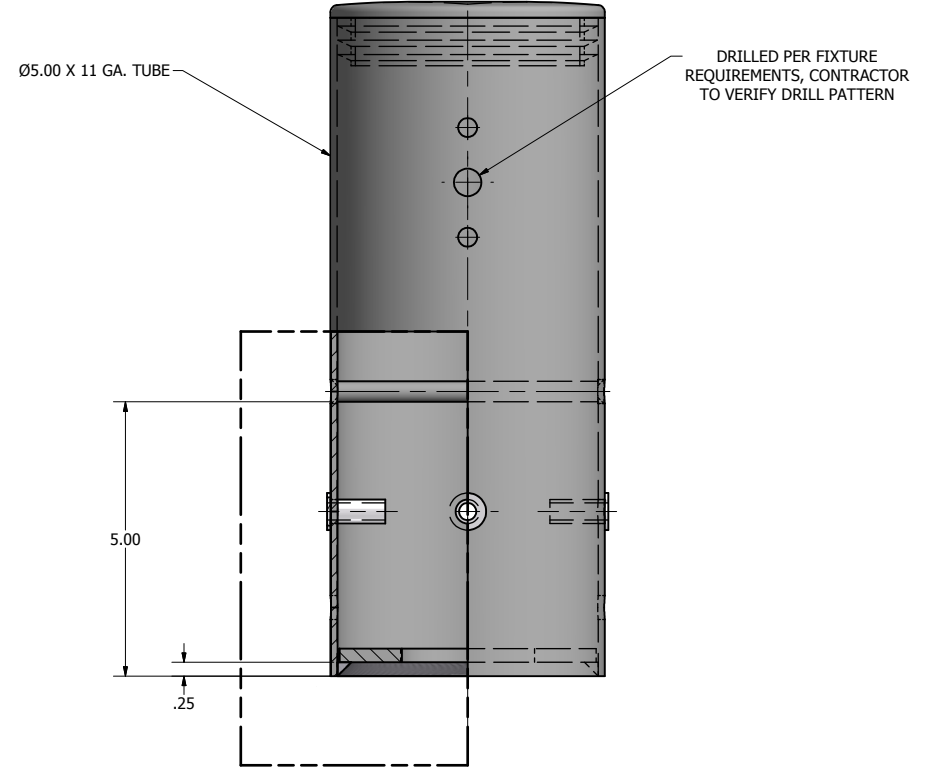


DRILL MOUNT OPTIONS

- D1- DRILLED FOR 1 FIXTURE
- D2- DRILLED FOR 2 FIXTURES AT 90° OR 180°
- D3- DRILLED FOR 3 FIXTURES AT 90° OR 120°
- D4- DRILLED FOR 4 FIXTURES

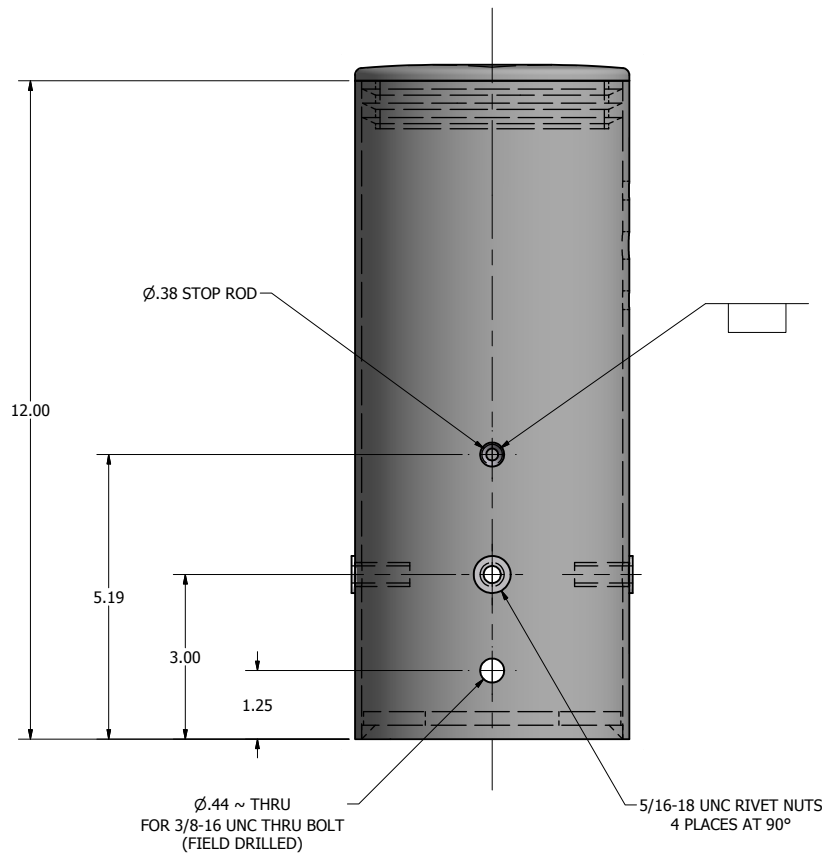

FINISH: BRACKET SHALL HAVE A POLYESTER POWDER COAT FINISH IN A STANDARD COLOR.

<p>180° 270° 0° HAND HOLE</p>	DRAWN: M. HARVALA 2/10/2015
	CHECKED
	REVISION: DATE:
	APPROVED:
	QUOTE:
	S.O.#
REF:	SCALE: NONE

UNITED LIGHTING STANDARDS
 A DWH COMPANY
 23171 Groesbeck Hwy.
 Warren, MI 48089
 P: (586) 774-5650 | F: (586) 774-5706
www.unitedlightingstandards.com

SOME GEOGRAPHICAL AREAS HAVE SPECIAL WIND CONDITIONS THAT CAN CREATE WIND INDUCED VIBRATIONS CAUSING A FATIGUE PROBLEM. NO METHOD HAS YET BEEN FOUND FOR PREDICTING DESTRUCTIVE LIGHTING POLE VIBRATION. THESE CONDITIONS ARE UNIQUE AND CANNOT BE GUARANTEED AGAINST, AND ARE THE RESPONSIBILITY OF A LOCAL SITE ENGINEER.

TITLE:		
CATALOG:		
DWG NO: PTAR-5RD-DRILL-STD	SIZE: C	SHEET 1 OF 1