

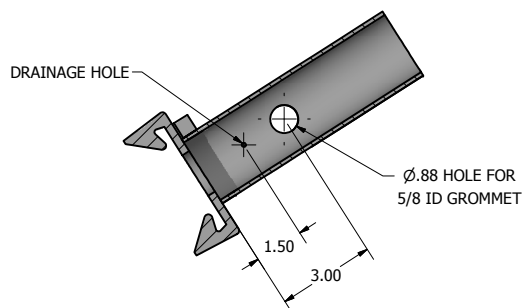


ARM RATING (PER AASHTO 1994)
WIND SPEED: 90 MPH MAX.
GUST: 117 MPH MAX.
EPA (LUMINAIRE): 2.5 SQ. FT. MAX.
WEIGHT (LUMINAIRE): 50 LBS. MAX.
MAX. 40' ABOVE GRADE LUMINAIRE M.H.

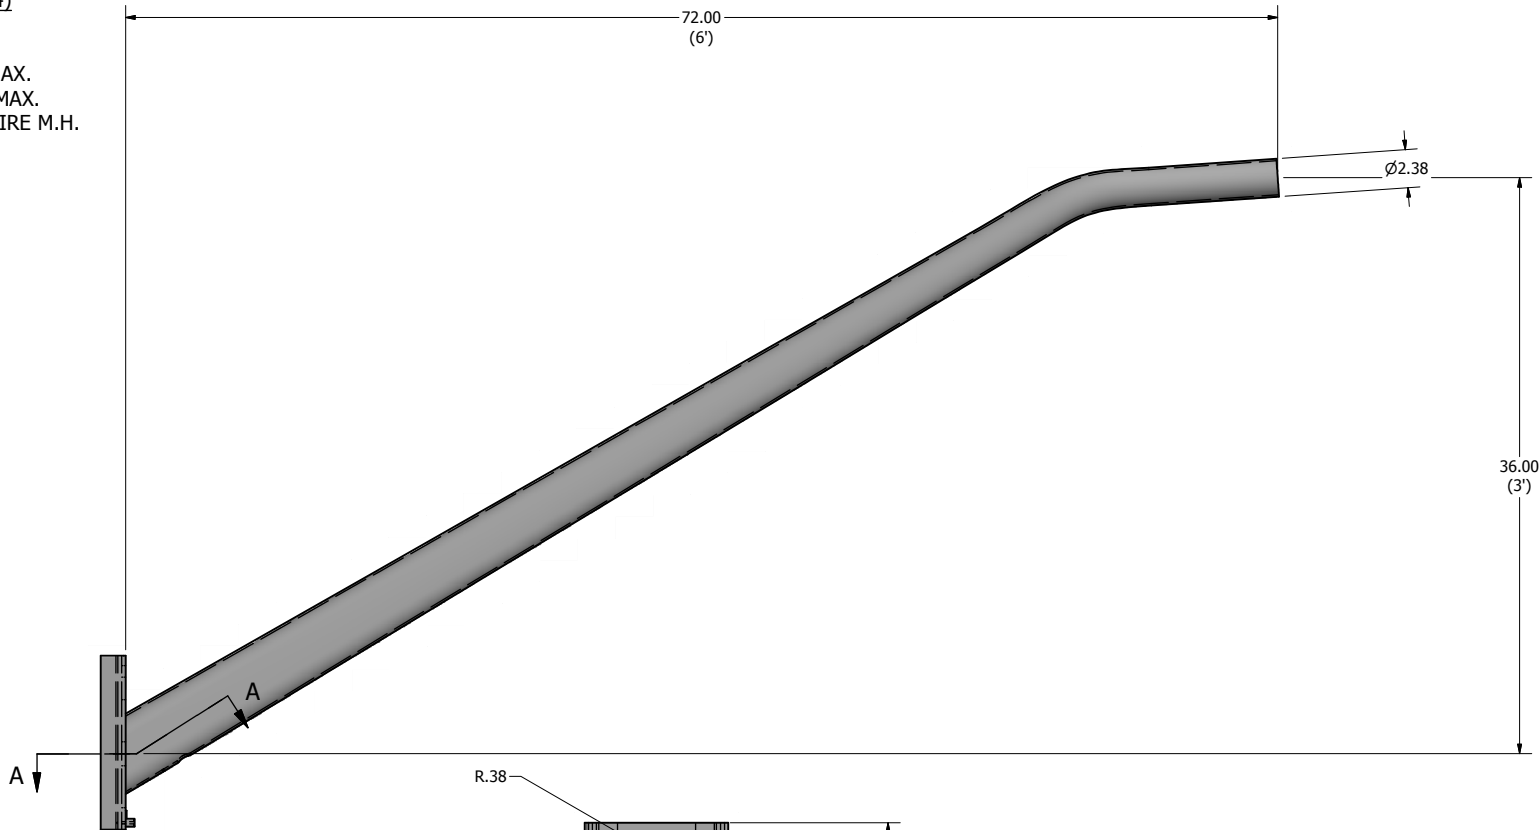


SECTION A-A
DRAIN HOLE & WIRE HOLE DETAIL VIEW

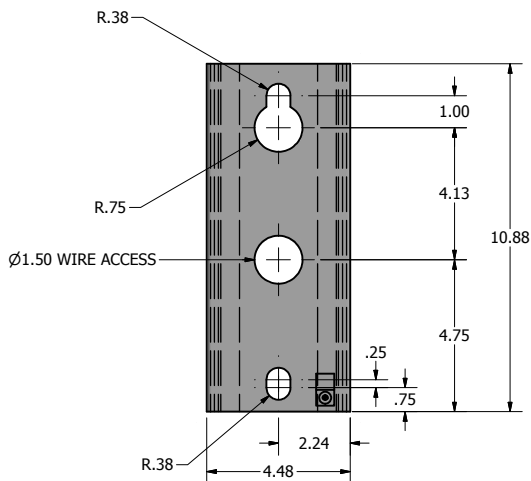

MOUNTING PLATE DETAIL VIEW

FINISH: ARM SHALL BE POLYESTER POWDER COAT FINISH IN A STANDARD COLOR.



DRAWN: M. HARVALA	2/9/2015
CHECKED	
REVISION:	DATE:
APPROVED:	
QUOTE:	
S.O.#	
REF:	SCALE: NONE

UNITED LIGHTING STANDARDS
A DWM COMPANY

23171 Groesbeck Hwy.
Warren, MI 48089
P: (586) 774-5650 | F: (586) 774-5706
www.unitedlightingstandards.com

SOME GEOGRAPHICAL AREAS HAVE SPECIAL WIND CONDITIONS THAT CAN CREATE WIND INDUCED VIBRATIONS CAUSING A FATIGUE PROBLEM. NO METHOD HAS YET BEEN FOUND FOR PREDICTING DESTRUCTIVE LIGHTING POLE VIBRATION. THESE CONDITIONS ARE UNIQUE AND CANNOT BE GUARANTEED AGAINST, AND ARE THE RESPONSIBILITY OF A LOCAL SITE ENGINEER.

TITLE:		
CATALOG:		
DWG NO: TEA-6A-STD	SIZE: C	SHEET 1 OF 1