


I Features


- Available In 78.74" (2m) Sections
- · Extruded Aluminum Construction
- · Anodized Matte Finish
- Straight and Angled Connectors Available to Create Long, Continuous Runs
- Drywall Mud-in Mounting for a Seamless Recessed Look
- · Consult Factory for Custom Lengths and Finishes
- · Available In Various Finish Colors

I Dimensions

Length	78.74" (2m)
Width (External)	2.42" (64.5mm)
Width (Internal)	0.81" (20.7mm)
Height	0.55" (14mm)

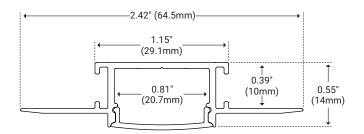

I Ordering Code Builder

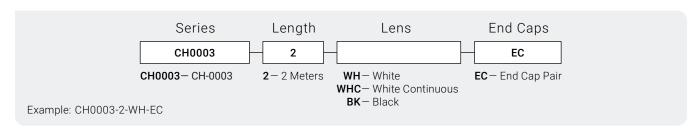



I Lens



White Lens

Unit Number	CH-LNS-AC-WH-2M		Ordering Code WH	
Dimension	L 78.74" (2m)	W 0.86" (22mm)	H 0.20" (5mm)	
Light transmission	70%			



White Lens Continuous

Unit Number	CH-LNS-AC-WH-CO		Ordering Code WHC	
Dimension	L Varies	W 0.86" (22mm)	H 0.20" (5mm)	
Light Transmission	70%			



Black Lens

Unit Number	CH-LNS-AC-BK-2M		Ordering Code BK	
Dimension	L 78.74" (2m)	W 0.86" (22mm)	H 0.20" (5mm)	
Light transmission	30%			



Disposable Cover

Unit Number	CH-LNS-AC-DISP-2M		INCLUDED
Dimension	L 78.74" (2m)	W 0.86" (22mm)	H 0.20" (5mm)
Description	Used to protect interior LED area during installation.		

I End Cap



End Cap Pair

•			
Unit Number	CH-EC-0003		Ordering Code EC
Dimension	L 0.25" (6.5mm)	W 1.14" (29mm)	H 0.55" (14mm)

I Optional Accessories

Product	Unit Number	Description
Straight Connector	CH-CON-02-180	Secure two pieces of channel together to form a continuous run of light.
90° Connector Horizontal	CH-CON-03-90H	Secure two pieces of channel together to form a 90° horizontal corner.
90° Connector Vertical	CH-CON-02-90V	Secure two pieces of channel together to form a 90° vertical corner.
120° Connector Horizontal	CH-CON-02-120H	Secure two pieces of channel together to form a 120° horizontal corner.