LIGHTWAY 6 – OUTDOOR / ASYMMETRICAL LENS
WALL RECESSED

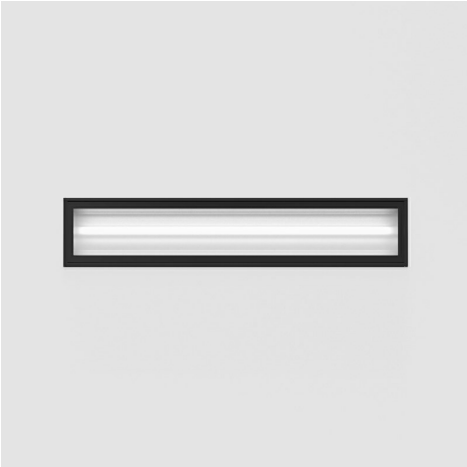

The Lightway 6 wall recessed Asymmetrical linear lens is developed for beautiful lighting in harsh environmental conditions. Made from extruded aluminum, This IP 67 element provides homogenous distribution of light over vertical surfaces while achieving a very high output, making it ideal for stairs and hallways lighting applications.

- The flush lens delivers the best wall uniformity. Vertical light uniformity (1:3)
- High output, ideal for vertical surfaces (over 4 meters high lighting applications)
- Wide lateral illumination with minimal cut-off
- 45cm of side walls to minimize unwanted light spillage

IP67 | Ik10 | LED

Luminaire

Application: Washer
Body Material: Extruded aluminium
Cutout: Cutout: length + 3mm / width 134mm / depth 105mm

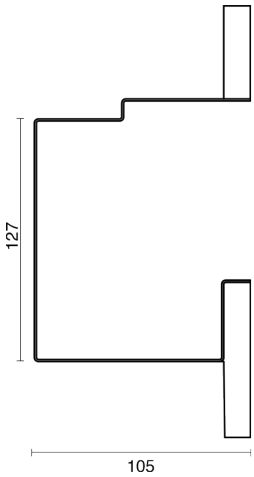

Installation

Ambient Temperature: -10 to 50°C

Optics

Optic Type: PMMA Asymmetrical Linear Lens
Surface Diffuser: Acrylic Frosted Extruded TIR Lens

Electrical equipment

Mains Voltage: 220-240 VAC 50/60 Hz
Control Gear Efficacy: > 85%

Polar Curve



LOR: 60.83%

We reserve the right to make technical changes without prior notice

projects@vicelighting.com - **www.vicelighting.com**
Lebanon 11-0125-Beirut +961 1 486311 - **France** 75012 Paris +33 06 75 32 73 23

LIGHTWAY 6 – OUTDOOR / ASYMMETRICAL LENS

WALL RECESSED

Code Index:

L 6	O	W R	W L	X X	_ _ _ _ _	C	6 7	_ _	N	I	_ _
Family	Environment	Mounting	Optic	Beam Angle	CRI/CCT & Power	Control	IP	Body Finish	Emergency	Layout	Length
					927L1			BS			10
					927L2			WS			20
					927L3			GS			30
					930L1						
					930L2						
					930L3						
					940L1						
					940L2						
					940L3						

Family

L6 Lightway 6

Environment

O Outdoor

Mounting

WR Wall Recessed

Optic

WL Asymmetrical Lens

Beam Angle

XX N/A

CRI/CCT & Power

		LED Load	initial Lumen
2700°K	**927L1:**	1 W	120 lm
	927L2:	1.5 W	170 lm
	927L3:	2.2 W	235 lm
	927L1:	2 W	240 lm
	927L2:	3 W	340 lm
	927L3:	4.4 W	470 lm
	927L1:	3 W	360 lm
	927L2:	4.5 W	510 lm
	927L3:	6.6 W	705 lm
3000°K	**930L1:**	1 W	130 lm
	930L2:	1.5 W	180 lm
	930L3:	2.2 W	250 lm
	930L1:	2 W	260 lm
	930L2:	3 W	360 lm
	930L3:	4.4 W	500 lm
	930L1:	3 W	390 lm
	930L2:	4.5 W	540 lm
	930L3:	6.6 W	750 lm
4000°K	**940L1:**	1 W	130 lm
	940L2:	1.5 W	180 lm
	940L3:	2.2 W	255 lm
	940L1:	2 W	260 lm
	940L2:	3 W	360 lm
	940L3:	4.4 W	510 lm
	940L1:	3 W	390 lm
	940L2:	4.5 W	540 lm
	940L3:	6.6 W	765 lm

Control

C Built-in driver, non-dimmable

IP

67 IP67

Body Finish

BS Black Smooth
WS White Smooth
GS Gray Smooth

Emergency

N No Emergency

Layout

I I Shape

Length

10 10 cm
20 20 cm
30 30 cm

We reserve the right to make technical changes without prior notice

projects@vicelighting.com – **www.vicelighting.com**
Lebanon 11-0125-Beirut +961 1 486311 – **France** 75012 Paris +33 06 75 32 73 23