

GEN4 SELECTABLE SLIM LED STRIP



PRODUCT DESCRIPTION

ABOVE ALL lighting's LED Slim Strip features a slim, low-profile and traditional design with diffused lens. Comes in 2ft, 4ft and 8ft. Color temperature selectable, 3500K, 4000K and 5000K in one fixture. It can be widely used in warehouse, office, garage, display shop and other commercial applications.

FEATURE

- Low-profile and traditional design
- 3500K, 4000K, 5000K in one
- Wattage selectable
- 2ft, 4ft and 8ft available

ELECTRICAL SYSTEM

- Input Voltage: 120-277V 50/60Hz
- Minimum Ambient -20°C, Maximum Ambient is 35°C
- Power Factor: > 0.88 at full load
- Total Harmonic Distortion: < 20% at full load

SPECIFICATION

2FT


Length: 24"
Width: 2.9"
Height: 3.267"

4FT

Length: 48"
Width: 2.9"
Height: 3.267"

8FT

Length: 92.7"
Width: 2.95"
Height: 3.26"

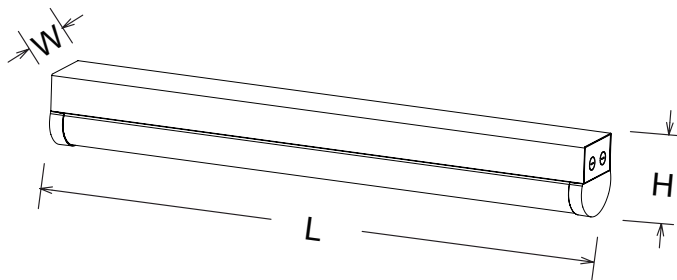

PERFORMANCE

CRI

80

CCT

3500K、 4000K、 5000K

Dimming

0-10V Dimming Standard

Projected Lifetime

L70 - 100,000 Hours

Working Temperature

-4-95°F (-20-35°C)

Certifications

- ETL listed
- Suitable for damp locations
- RoHs compliant

Ordering Information

Example: SSTR4-12D-40SP-SW1

Slim Strip	Dimension	Dimmable	Watts	CCT	Voltage	Control
SSTR4	06 - 2FT	D - 0-10V Dimmable	24SP - Selectable Power 10W/15W/24W ¹	SW - Selectable White 3500K/4000K/5000K ⁴	1-120 - 277V	Blank - None
	12 - 4FT		40SP - Selectable Power 24W/32W/40W ²			
	24 - 8FT		90SP - Selectable Power 64W/75W/90W ³			

1. 24W is default setting.
2. 40W is default setting.
3. 90W is default setting.
4. 4000K is default setting.

* White finish is standard. Other color is available for a premium setup fee. Consult customer service for additional information.

PERFORMANCE DATA


Lumen values are estimated with LED data sheet.

Watts	Lumen Output	Size	CRI	AC Input 120V	CCT	LPW
24	3000	2FT	80	0.20A	3500/4000K	125
40	5000	4FT	80	0.33A	3500/4000K	125
90	10900	8FT	80	0.75A	3500/4000K	122

Notes: 0.9 multiplier is for 3000K.

PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory.

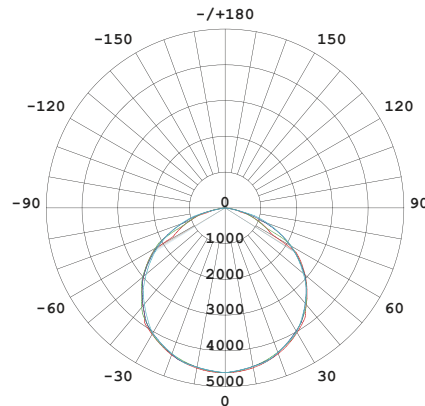

Warranty

Five year limited warranty.

Note:

Please refer to the instruction manual for motion sensor default setting.