



GLAUCE WALL LINEAR



PRODUCT DESCRIPTION

The Glauce Wall Linear delivers clear direct and indirect wall light to commercial, hospitality and residential interior wall lighting applications. Perforation and Louver luminous design. Length comes in 2FT and 4FT. 3500K, 4000K and 5000K are in one fixture. Sensor and emergency back-up are optional.

FEATURE

- Sleek wall mounted linear design
- Perforation and Louver luminous design
- Length comes in 2FT and 4FT
- 3500K, 4000K and 5000K are in one
- Direct and indirect distribution
- Sensor and emergency back-up optional

ELECTRICAL SYSTEM

- Input Voltage: 120-347V, 50/60Hz
- 0-10V Dimming optional
- Minimum Ambient -20°C, Maximum Ambient is 40°C
Power Factor: > 0.9 at full load
- Total Harmonic Distortion: < 20% at full load

PERFORMANCE

CRI

80

CCT

3500K, 4000K, 5000K selectable

Dimming

0-10V Dimming

Projected Lifetime

L70 - 100,000 Hours

Working Temperature

-4-104°F (-20-40°C)

Certifications

- cULus listed
- Suitable for dry locations
- RoHs compliant

SPECIFICATION

L X W X H

2FT: 27 2/8" X 7 2/8" X 2 3/8"


4FT: 49 4/8" X 7 2/8" X 2 3/8"

Net Weight

2FT: 4.4 lbs / 2.0 kg

4FT: 9.9 lbs / 4.5 kg

Louver Type

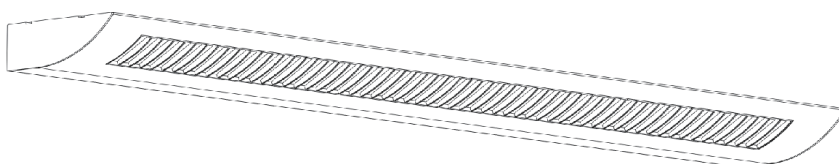

Perforation Type



Ordering Information

Example: GWLL1250SW8



| Series | Type | Length | Watts | CCT | Voltage | Controls | Finish |
|--------|-----------------|----------|----------|--|--------------|--|-----------------|
| GWL | L - Louver | 06 - 2FT | 25 - 25W | SW - 3500K/4000K/ 5000K selectable ¹ | 8 - 120-347V | - Blank - None | - Blank - White |
| | P - Perforation | 12 - 4FT | 50 - 50W | | | | |
| | | | | | | MSW - Microwave Dimming Sensor ² | |
| | | | | | | EBU - Emergency Battery Back-up | |

Notice:

1. Default setting is 3500K. If other wattage needed please change the setting in the field.
 2. Sensor default setting is OFF after 10 seconds on vacancy, and 100% on Occupancy. Other dimming functions can be set by DIP switch in the field.
- * White finish is standard. Custom color is available for a premium setup fee. Consult customer service for additional information.

PHOTOMETRY

All published luminaire photo metric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Result may vary per actual order.

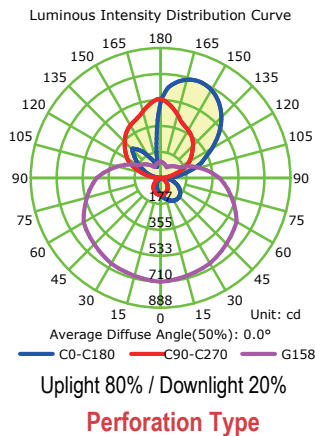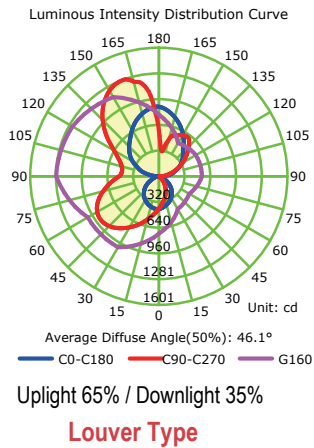

PERFORMANCE DATA

LUMEN OUTPUT

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Louver

| Watts | Lumen Output | AC Input 120V | CCT | CRI | LPW |
|-------|--------------|---------------|-------|-----|-----|
| 25 | 2200 | 0.20A | 4000K | 80 | 90 |
| 50 | 4500 | 0.42A | 4000K | 80 | 90 |

Perforation

| Watts | Lumen Output | AC Input 120V | CCT | CRI | LPW |
|-------|--------------|---------------|-------|-----|-----|
| 25 | 1900 | 0.20A | 4000K | 80 | 76 |
| 50 | 3800 | 0.42A | 4000K | 80 | 76 |

Warranty

Five year limited warranty.

Notes: Specifications subject to change without notice.