

# Passo CR

6" Soft Glow LED

Recessed Wall Luminaire



PCCS6



## Features

The Passo family of luminaires includes high quality, architecturally relevant fixtures suitable for use in both outdoor or indoor applications. All members of the Passo family feature an independently sealed optical chamber and fully potted driver. These features are especially beneficial in exterior applications as they help compensate for the challenges in getting a good seal between a pre-installed back box and the faceplate as well as those challenges in fully sealing the conduit system. Each luminaire is available in a choice of three output levels to help tailor the desired illuminance to the project and a standard 0-10V dimmable driver allows even further flexibility.

## Product Overview

Type:	Recessed Wall Luminaire
Wattage:	up to 12.6W
Lumen Output :	up to 470 lm
Color Temp:	2700K, 3000K, 4000K
Dimming:	0-10V down to 10%

## PROJECT:

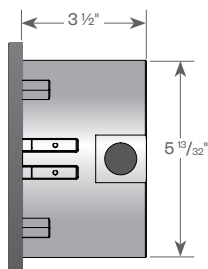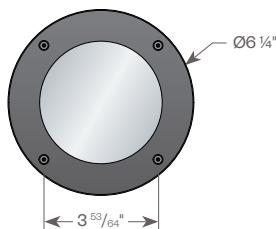

## TYPE:

### Application:

Designed for new construction in interior or exterior hollow walls or poured concrete.

### Construction:

- Die-cast aluminum housing with protective powdercoat finish
- Sealed die-cast aluminum internal optical chamber
- Die-cast aluminum faceplate
- 1/8" tempered opal glass lens

### Driver:

- Drive Current (175, 350 or 700mA)
- 2.5kv surge protection
- Fully potted
- Input voltage 120V-277V auto-sensing
- 0-10V dimmable down to 10%

**ETL listed, suitable for wet locations.**

### Optics:

Individually sealed optical chamber insures LEDs are secure independent of the installation of the back box.

### Finish:

Premium quality thermoset polyester powdercoat faceplate for a durable finish.



**5** year limited warranty  
AMERLUX LED



# Passo CR

6" Soft Glow LED Recessed Wall Luminaire



## PROJECT:

## TYPE:

### Luminaire Ordering Information

PCCS6 . . .

1

2

3

1

#### Model

PCCS6

2

#### Performance Code

L27 - 2700K / 175mA

L30 - 3000K / 175mA

L40 - 4000K / 175mA

H27 - 2700K / 350mA

H30 - 3000K / 350mA

H40 - 4000K / 350mA

VH27 - 2700K / 700mA

VH30 - 3000K / 700mA

VH40 - 4000K / 700mA

3

#### Finish

ANT - Anthracite Gray

BLK - Satin Black

CLB - Classic Bronze

SLV - Silver

WHT - White

CSTM - Custom

### Back Box Ordering Information (Back Box must be ordered for a complete unit, ordered separately)

CRBX-6

1

1

#### Model

CRBX-6

**Note:** Back Box can be shipped ahead of the steplight, upon request.

# Passo CR


6" Soft Glow LED Recessed Wall Luminaire




## PROJECT:

## TYPE:

### Construction Detail

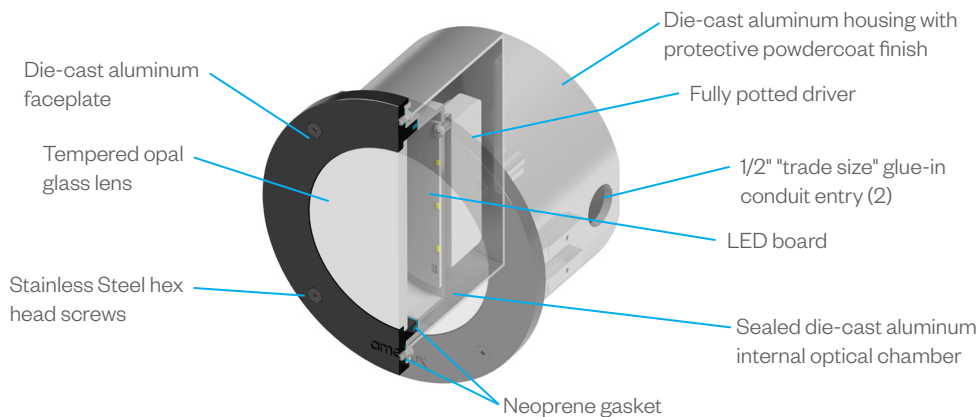


### Application Brackets (included with order)

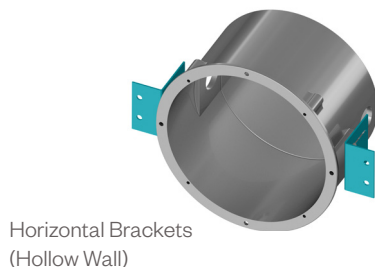

### Performance Detail

PCCS6 Polar Graph

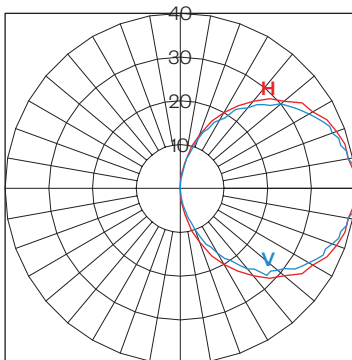

Performance Code	CCT/CRI	Approx. Lumens	Drive Current	Nominal Input Power
L27	2700K/80	118	175mA	3.4W
L30	3000K/80	124		
L40	4000K/70	133		
H27	2700K/80	236	350mA	6.3W
H30	3000K/80	248		
H40	4000K/70	265		
VH27	2700K/80	418	700mA	12.6W
VH30	3000K/80	439		
VH40	4000K/70	470		

**Note: IES files available on our website.  
For VHxx data - use Hxx ies files with a  
1.77 multiplier.**