



GUS ARCHITECTURAL WALL PACK PRODUCT FAMILY



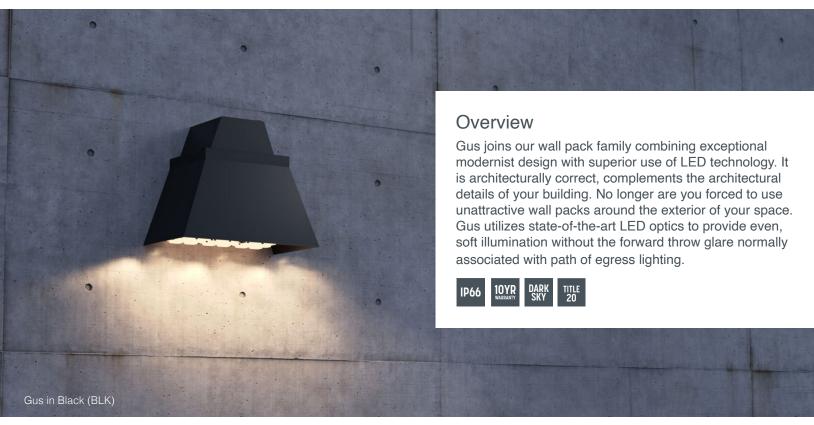







WATTAGE	41	
DELIVERED LUMENS	5107	
OPTIC OPTIONS	Type 2, Type 3, Type 4	
INPUT VOLTAGE	120-277	
INGRESS	IP66	
CCT OPTIONS	2700, 3000, 3500, 4000	
OCCUPANCY SENSOR, STANDARD	Factory set at Bi-level 100/30% motion and low light level for 8' to 15' mounting. May be programmed in the field per your requirement.	
WEIGHT	14.75 pounds	
CONSTRUCTION	ALVA Proprietary WP-1 LED Module: Die cast aluminum	
	Decorative Housing: Cold rolled steel with state of the art architectural powder coat finish	
WARRANTY	10 years	

GUS ARCHITECTURAL WALL PACK PRODUCT FAMILY





Sensor Operation Overview

Dimming Function

This function inside the motion sensor to achieve tri-level control. for some areas which require a light change notice before switch-off. The sensor offers 3 levels of light: 100%-->dimmed light (natural light is insufficient) J-->off; and 2 periods of selectable waiting time: motion hold-time and stand-by period; Selectable daylight threshold and freedom of detection area.

Sensor Remote Programmer Unit, RC-100, (available for purchase from ALVA for field programming)









Black **BLK**



Dark Bronze **DB**



Enviro Satin Nickel ESN

Custom Ral Available (CP)



ORDER CODE:

MODEL	ССТ	OPTICS	FINISH
GUS			
	27 2700	T2 Type 2	BLK Black
	30 <i>3000</i>	T3 Type 3	DB Dark Bronze
	35 <i>3500</i>	T4 Type 4	ESN Enviro Satin Nickel
	40 <i>4000</i>		CP Custom Ral