RemPhosBASE

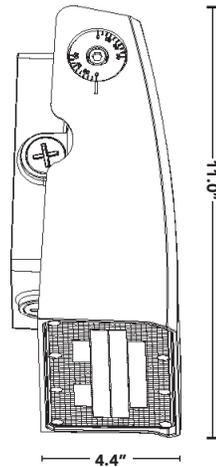# ADJUSTABLE WALL PACK

-> Easily adjust the color temperature via a switch inside the unit.

-> Easily adjust the wattages via a switch inside the unit.

-> Simply pivot the fixture head from 0° to 90° to direct the light exactly where you want it.

-> Die-cast aluminum housing makes the unit suitable for wet locations.

-> Built-in photocell.

-> Includes level indicator to ensure proper alignment when installed.

flexCOLOR
switch between color temps

<- switch between wattages

flexWATT

11.0"

4.4"

5 YEAR WARRANTY	120/277V ALSO WORKS ON 208V & 240V	0-10V DIM	70+ CRI	IP65 RATED INGRESS PROTECTION	-40°F TO 122°F OPERATING TEMP	L70 50,000hrs RATED LIFE

PART #	REPLACES	WATTAGE	LUMENS	FLEXCOLOR	DLC CODE
RP-B-WPA-30L-FWFC	175W HID	15W-20W-25W	Up to 3000	3000K/**4000K**/5000K	PP4U51T0

DLC LISTED

Light Efficient Design