VersaLux™ Series VA
ARCHITECTURAL LIGHTING SERIES

Job Name: Fixture Type:

Accentlight, Open Aperture Adjustable Lampholder

MR16 MH

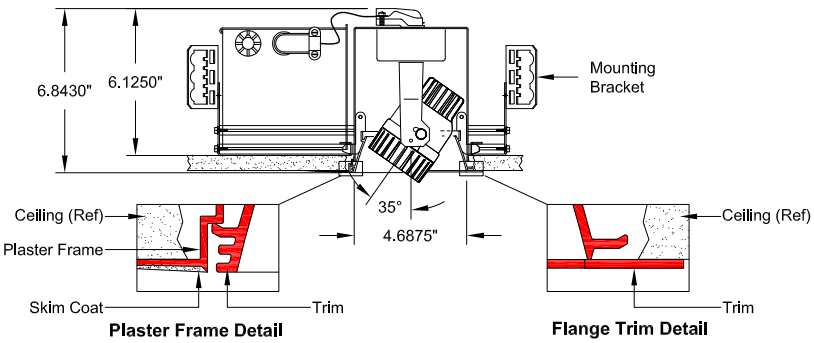

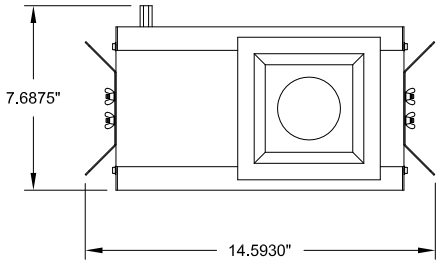

Ceiling Cut-out : 5.3750" x 5.3750" | Trim Flange : 5.9375" x 5.9375" | Aperture: 4.6875" x 4.6875"

_____-1-M6M _____-_____/B-AD-_____

Trim Type | Wattage | Trim Finish | Voltage

Trim Type	Wattage	Trim Finish	Voltage
☐ VAP Plaster	☐ 20	☐ W White	☐ 1 (120V)
☐ VAF Flange	☐ 39	☐ B Black	☐ 2 (277V)

Description
Recessed open aperture metal halide accent fixture. Adjustable lampholder. One MR16 MH lamp. Flanged or plaster frame trim.

Features
- Below ceiling access to the ballast and wiring.
- Lampholder is adjustable from 0°-35°.
- Plaster frame trim provides 0.062" reveal to minimize skim coat cracking.
- Integral Thermal Protection.

Fixture Specifications
Dimensions: 14.593"L x 7.685"W x 6.125"H
Weight: Approx. 12 lbs.
Ceiling Cutout: 5.375"L x 5.375"W

Electrical
- Power Consumption: 39 watts max.
- Ambient temperature 100 °F. maximum.
- Integral electronic ballast.
- Through branch wiring capable.

Mounting
Universal mounting brackets included.
Contact factory for special ceiling conditions.

Options (Consult factory)
- Lenses: Page 3

Photometry: Page 2

UFCW LOCAL 1-D

c UL us

NYC calendar #45760

All designs and scaled drawings shall remain the property of STARFIRE LIGHTING, INC., and may not be reproduced or transmitted without expressed written consent. STARFIRE LIGHTING, INC. reserves the right to make changes on approved designs to facilitate manufacturing methods to the extent that such changes do not compromise design integrity.

VersaLux™ Series VA

Accentlight, Open Aperture Adjustable Lampholder

MR16 MH

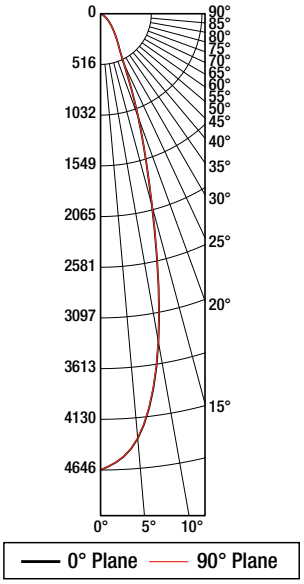

1 Lamp Photometrics

39 Watt MR16 Metal Halide, 25° Flood

Clear Lens

Photometry reports for other fixture configurations, consult factory

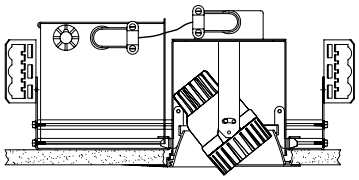

Total Luminaire Efficiency: 75.00%

Candela Distribution

	0	15	30	45	60	75	90
0	4646	4646	4646	4646	4646	4646	4646
5	4341	4337	4365	4352	4334	4354	4336
10	3392	3397	3391	3399	3409	3397	3384
15	2022	2028	2028	2020	2034	2020	2029
20	1122	1117	1121	1124	1116	1116	1122
25	565	570	568	567	564	568	570
30	361	361	358	358	361	356	360
35	258	255	256	254	257	255	256
40	187	187	187	187	188	186	188
45	133	132	132	132	132	132	132
50	92	91	92	93	92	91	91
55	60	60	60	60	59	60	61
60	33	33	34	33	34	34	34
65	14	14	15	14	15	14	14
70	4	4	4	4	4	4	4
75	1	1	1	1	1	1	1
80	0	0	0	0	0	0	0
85	0	0	0	0	0	0	0
90	0	0	0	0	0	0	0

Zonal Lumen Summary

5	208
10	323
15	287
20	210
25	131
30	98
35	80
40	66
45	51
50	38
55	27
60	16
65	7
70	2
75	1
80	0
85	0
90	0

Utilization

RC	80				70				50			30			10			Flux
RW	**70**	**50**	**30**	**10**	**70**	**50**	**30**	**10**	**50**	**30**	**10**	**50**	**30**	**10**	**50**	**30**	**10**	**0**
0	90	90	90	90	88	88	88	88	84	84	84	80	80	80	77	77	77	75
1	86	84	82	81	84	83	81	80	80	78	77	77	76	75	72	72	72	71
2	82	79	76	74	81	78	75	73	75	73	72	73	72	70	68	68	68	68
3	79	75	71	69	77	74	71	68	72	69	67	70	68	66	64	64	64	64
4	76	71	67	64	74	70	66	64	68	65	63	67	64	62	61	61	61	61
5	73	67	63	60	71	66	63	60	65	62	60	64	61	59	58	58	58	58
6	70	64	60	57	69	63	60	57	62	59	57	61	58	56	55	55	55	55
7	67	61	57	54	66	61	57	54	60	56	54	59	56	54	53	53	53	53
8	65	59	55	52	64	58	54	52	57	54	52	57	54	52	51	51	51	50
9	62	56	52	50	62	56	52	50	55	52	50	55	52	50	49	49	49	49
10	60	54	50	48	60	54	50	48	53	50	48	53	50	48	47	47	47	4

Accentlight, Open Aperture Adjustable Lampholder MR16 MH

VA-1-M6M

Job Name: Fixture Type:

Lens Options

	Accessories/Lenses		Cat. No.
☐		Snoot	SNM6
☐		Cross Blade Baffle	XBM6
☐		Hexagonal Louver	HXM6
☐		Solite Spread Lens	SOM6
☐		Frosted Solite Spread Lens	FSM6
☐		Prismatic Spread Lens	PRM6
☐		Frosted Prismatic Spread Lens	FPM6
☐		Skytex Linear Spread Lens	SKM6
☐		Frosted Skytex Linear Spread Lens	FKM6
☐		Flash Opal Lens	FOM6
☐		Optivex UV Lens	UVM6
☐		Frosted Clear Lens	FCM6
☐		Red Filter Lens	RLM6
☐		Green Filter Lens	GLM6
☐		Blue Filter Lens	BLM6
☐		Amber Filter Lens	ALM6
☐		Dichroic Filter Lens	DLM6

For other accessory/lens options, consult factory.