

ORBIS - QUICKSHIP

Inner Acrylic Interior Pendant



9777 Reavis Park Drive

St. Louis, MO 63123

800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

LED: High efficiency mid-power LEDs.

LED Dimming: 1% 0-10V dimming standard.



Acrylic: Acrylic is UL-94 HB Flame Class rated.


Cable Hanger: Standard 150" cable and power cord for on-site adjustability. Canopy painted textured white.

Canopy: Max remote driver installation distance: White LED 25ft from fixture body.

Finish: Highly durable oven cured no VOC premium powder coat.

Surge Protection: External surge protector provided standard.

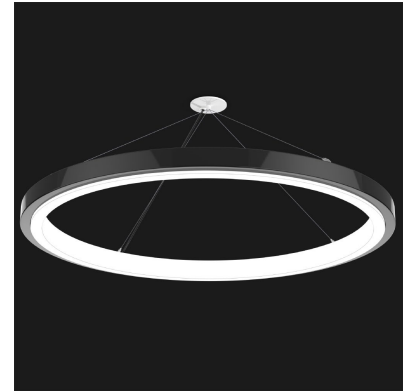

SAMPLE CATALOG NUMBER:				
GL-2736-	V-	BLK-	1-	BC
MODEL NO.	LAMPING	FINISH	HANGER	CORD
GL-2736 W in 36" 15lbs B in 3" 6.8kg H in 18.75"-145"	V. 36LED35	Powder Coat BLK-Black Supplied with black power cord.	1. Cable - Standard  Hanger option 1 supplied with remote driver box. Driver mounted remotely.	BC. Black cord supplied as standard with black finish

All Dimensions are nominal.

Light Source Definition

Code	Total Wattage	Rated CRI	Rated Life Hrs	Delivered Lumens	Delivered Kelvin
36LED35	76W	+80	50000	7261	3500

Universal Voltage unless otherwise specified.

Quantity restrictions may apply. Contact factory for larger quantities.