

### GENERAL SPECIFICATION

**Shade:** Standard white fabric shade. Custom shapes, sizes, and colors available.

**Lamping:** Standard lamping packages offer long lamp life, high power factor energy efficient electronic driver. 1% 0-10v dimming standard.




**Acrylic:** UL-94 HB Flame Class rated. Standard white opal top and bottom lens.

**Standard Finish:** Highly durable oven cured no VOC premium powder coat.

**Custom:** Contact factory for custom lengths and lamping.

**LED:** Driver mounted in 4" square x 2 1/8" deep junction box:  
Steel City #52171 or equivalent (supplied by others)

**Surge Protection:** External surge protector provided as standard.

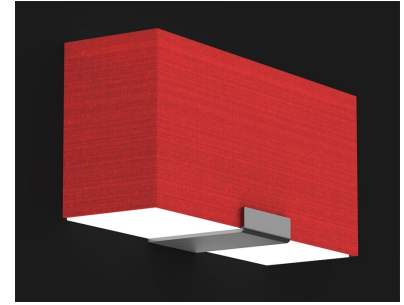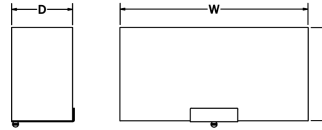

SAMPLE CATALOG NUMBER: GL-4710-				
MODEL NO.	B-	W-	NSN-	A
	LAMPING	SHADE	FINISH	OPTION(S)
<b>GL-4710</b> W in 13" mm 330 H in 6" mm 150 4lbs D in 3 3/4" mm 95 1.8kg	<b>A.</b> 14LED30 <b>B.</b> 14LED35 <b>C.</b> 14LED40	<b>W</b> White <b>C</b> Cream <b>R</b> Red <b>BL</b> Blue <b>O</b> Olive <b>S</b> Stone  Washable: <b>WW</b> White <b>WC</b> Cream <b>WT</b> Tan <b>WB</b> Brown	<b>Standard:</b> Powder Coat <b>BLK</b> -Black <b>BL</b> -Blue <b>GR</b> -Gray <b>LG</b> -Light Gray <b>BE</b> -Beige <b>PAB</b> -Antique Brass <b>PA</b> -Painted Aluminum <b>PTC</b> -Painted Copper <b>WH</b> -White <b>DBZ</b> -Dark Bronze <b>NSN</b> -New Satin Nickel <b>BRN</b> -Brown <b>RD</b> -Red <b>CH</b> -Champagne <b>RG</b> -Reed Green <b>SG</b> -Sungold <b>GM</b> -Gun Metal <b>POR</b> -Oil Rubbed Bronze  Textured Powder <b>TLV</b> -Light Verdigris <b>TWH</b> -Textured White <b>TBL</b> -Textured Black <b>TS</b> -Textured Silver <b>TBN</b> -Terra Brown <b>TBZ</b> -Textured Bronze  <b>Premium:</b> <b>SA</b> -Satin Aluminum	<b>A.</b> No Options <b>EL.</b> Emergency LED Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. <b>TD.</b> Triac/ELV Dimming

All dimensions are nominal.

### Shade

#### Standard



#### Washable - Trilam



Custom fabrics available upon request. Contact factory. Reproduced graphic representation. Please contact sales@glighting.com for fabric samples.

### Lamp Definition

Lamp	LED	Kelvin	CRI	Rated Life Hrs	Delivered Lumens
14LED30	14W	3000	80	50000	1300
14LED35	14W	3500	80	50000	1300
14LED40	14W	4000	80	50000	1300

Universal Voltage unless otherwise specified.