



MODEL
AF LED

TYPE
LED AREA

SERIES
SITE & AREA



ZUMA LIGHTING LLC
325 N LARCHMONT BLVD STE 406, LOS ANGELES, CA 90004
INFO@ZUMALIGHTING.COM • (310) 975-3126 • ZUMALIGHTING.COM

ORDERING INFORMATION

Model AF LED

Type LED AREA

Series SITE & AREA



FIXTURE	WATTAGE	VOLTAGE	CCT & CRI	OPTICS	BRACKET TYPE	FINISH	OPTIONS
AFLED-S = Small Housing	AFLED-S 20W 30W	U = 100v- 277v	40K = 4000K 50K = 5000K	Wide = Wide Beam Pattern	KN = Knuckle YK = Yoke	BZ = Bronze WH = White NA = Natural Aluminum BK = Black CC = Custom Color	B = Button Photocell D = 1-10V Dimming S = SPD 10KV TVM = Top Visor Mount BVM = Bottom Visor Mount WG = Wire Guard
AFLED-M = Medium Housing	AFLED-M						
AFLED-L = Large Housing	50W 70W 80W						
AFLED-XL = X-Large Housing	AFLED-L 100W 120W 150W 200W						
	AFLED-XL 240W 300W						

Housing

The IP65 rated housing is fabricated from corrosion resistant, rugged die-cast aluminum and stainless steel hardware.

Lens

High impact UV stabilized PC injection lens provides a variety of NEMA distribution patterns.


Electrical Components

ETL and DLC Premium listed, IP67 driver and ROHS compliant, ambient operating temperature -40°C to 40°C.

Finish



Thermoset polyester oven-baked powder coat, in any standard color. Custom colors are available to your specification.

NEMA Distribution

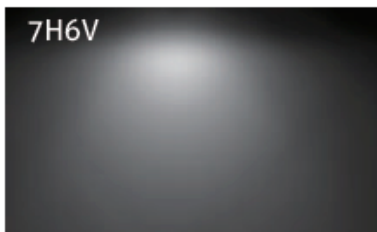

Mounting and Accessories





Field replaceable brackets and accessories are designed for easy installation and interchangeability.

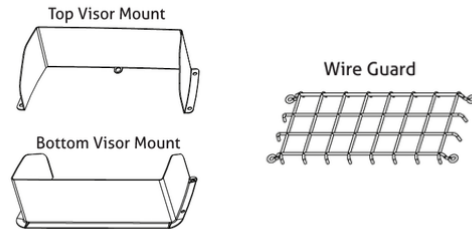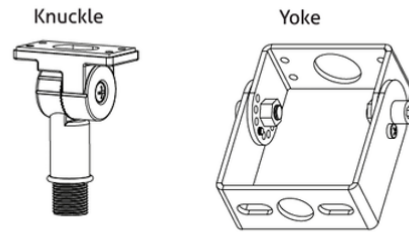

Images and drawings not to scale

DIMENSIONS

(inch/mm)

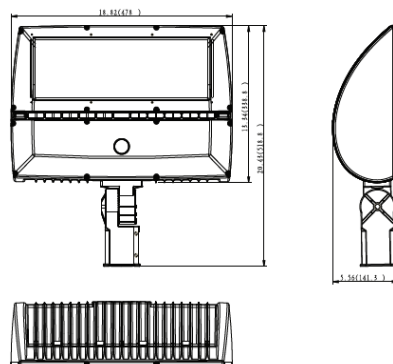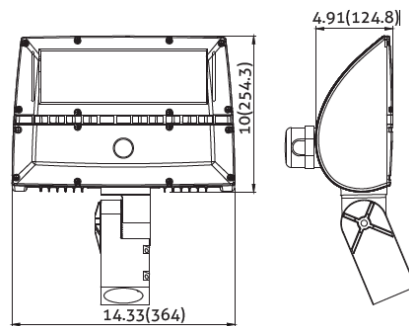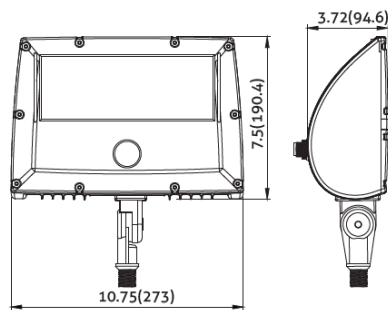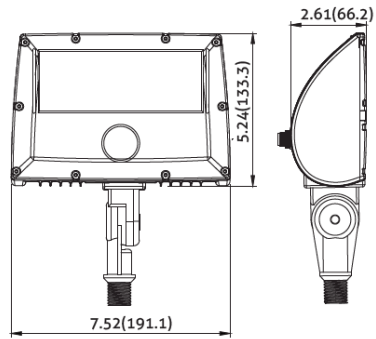

ZUMA LIGHTING LLC

325 N LARCHMONT BLVD STE 406, LOS ANGELES, CA 90004

INFO@ZUMALIGHTING.COM • (310) 975-3126 • ZUMALIGHTING.COM