





ZUMALIGHTING
QUALITY OUTDOOR SOLUTIONS



STRAIGHT SQUARE STEEL POLES

ZUMA LIGHTING LLC
325 N LARCHMONT BLVD STE 406, LOS ANGELES, CA 90004
INFO@ZUMALIGHTING.COM • (310) 975-3126 • ZUMALIGHTING.COM

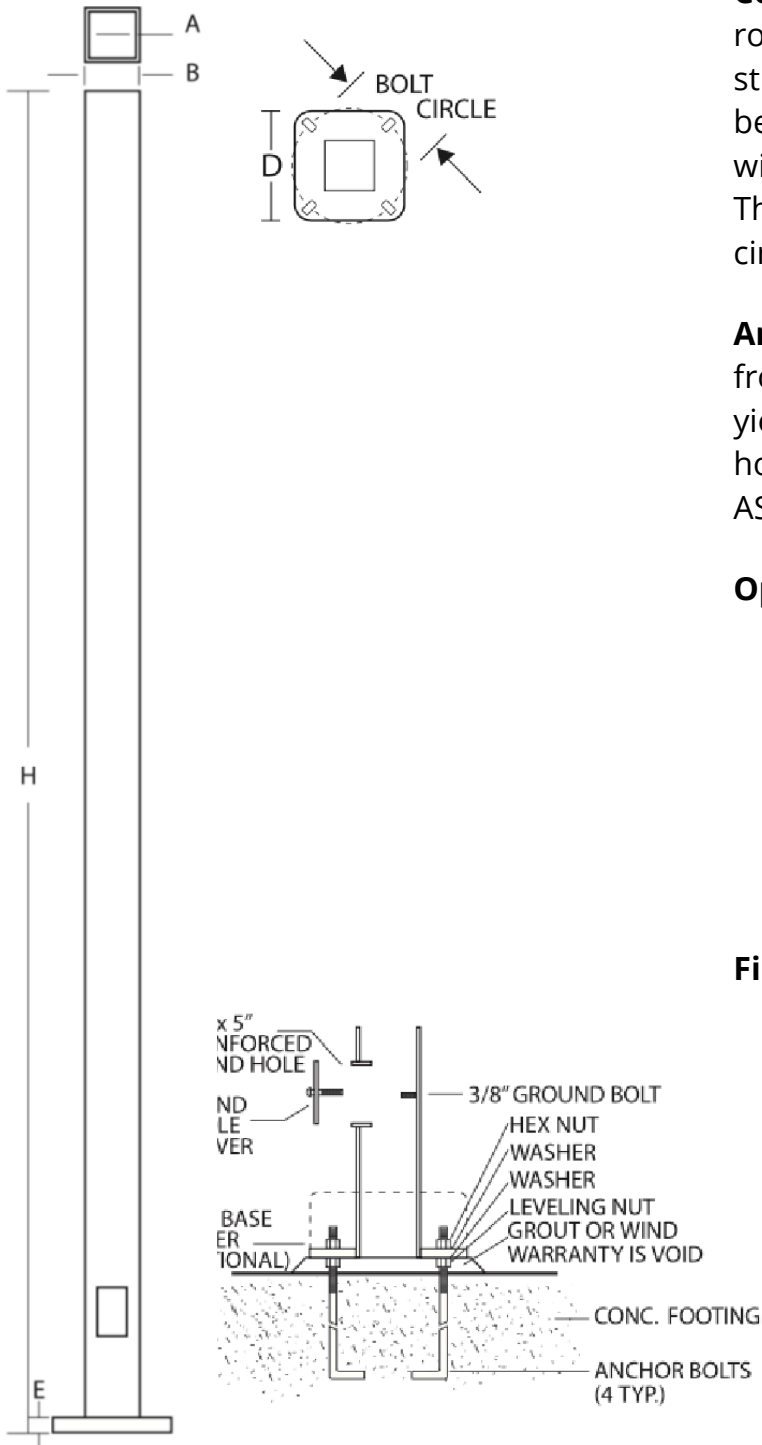

Construction – Poles are fabricated from hot rolled carbon steel with minimum yield strength of 55,000 psi. The anchor base shall be fabricated from hot rolled carbon steel with minimum yield strength of 36,000 psi. The base telescopes the pole shaft and is circumferentially welded top and bottom.

Anchor Bolts – Anchor bolts are fabricated from hot rolled steel bar with a minimum yield strength of 50,000 psi. Anchor bolts are hot dipped galvanized in accordance to ASTM-A-153.

Options:

- AT – 2-3/8" O.D. x 5" long tenon
- BT – 2-7/8" O.D. x 5" long tenon
- CT – 3" O.D. x 5" long tenon
- BC – Two-piece square base cover
- DR – Duplex Receptacle
- GFI – Ground Fault Interrupter

Finish – polyester powder fuse coating

- BZ – Bronze
- BK – Black
- GN – Green
- WT – White
- GA – Hot Dip Galvanized
- CC – Custom Color (consult factory)

X	MOD NUMBER	WALL	SHAFT SIZE	HT.	BASE PLATE		BOLT CIRCLE	ANCHOR BOTLS	EPA 100 MPH	SHIP WT.
		A	B	H	D	E				
<input type="radio"/>	SSS-11-408	.120"	4" SQ.	8'	9 1/2"	1/2"	9 1/2"	3/4x16x3	28.8	64#
<input type="radio"/>	SSS-11-410	.120"	4" SQ.	10'	9 1/2"	1/2"	9 1/2"	3/4x16x3	26.0	78#
<input type="radio"/>	SSS-11-412	.120"	4" SQ.	12'	9 1/2"	1/2"	9 1/2"	3/4x16x3	23.0	92#
<input type="radio"/>	SSS-11-414	.120"	4" SQ.	14'	9 1/2"	1/2"	9 1/2"	3/4x16x3	21	106#
<input type="radio"/>	SSS-11-415	.120"	4" SQ.	15'	9 1/2"	1/2"	9 1/2"	3/4x16x3	18	113#
<input type="radio"/>	SSS-11-416	.120"	4" SQ.	16'	9 1/2"	1/2"	9 1/2"	3/4x16x3	16	120#
<input type="radio"/>	SSS-11-418	.120"	4" SQ.	18'	9 1/2"	3/4"	9 1/2"	3/4x24x3	14	134#
<input type="radio"/>	SSS-11-420	.120"	4" SQ.	20'	9 1/2"	3/4"	9 1/2"	3/4x24x3	10.0	148#
<input type="radio"/>	SSS-11-422	.120"	4" SQ.	22'	9 1/2"	3/4"	9 1/2"	3/4x24x3	8	162#
<input type="radio"/>	SSS-11-424	.120"	4" SQ.	24'	9 1/2"	3/4"	9 1/2"	3/4x24x3	7	176#
<input type="radio"/>	SSS-11-425	.120"	4" SQ.	25'	9 1/2"	3/4"	9 1/2"	3/4x24x3	6	190#
<input type="radio"/>	SSS-7-420	180"	4" SQ.	20'	9 1/2"	3/4"	9 1/2"	3/4x24x3	15	208#
<input type="radio"/>	SSS-7-422	180"	4" SQ.	22'	9 1/2"	3/4"	9 1/2"	3/4x24x3	11	227#
<input type="radio"/>	SSS-7-424	180"	4" SQ.	24'	9 1/2"	3/4"	9 1/2"	3/4x24x3	10	246#
<input type="radio"/>	SSS-7-425	180"	4" SQ.	25'	9 1/2"	3/4"	9 1/2"	3/4x24x3	8	256#
<input type="radio"/>	SSS-11-520	.120"	5" SQ.	20'	11 3/4"	3/4"	12"	3/4x24x3	18	190#
<input type="radio"/>	SSS-11-522	.120"	5" SQ.	22'	11 3/4"	3/4"	12"	3/4x24x3	16	206#
<input type="radio"/>	SSS-11-524	.120"	5" SQ.	24'	11 3/4"	3/4"	12"	3/4x24x3	13	222#
<input type="radio"/>	SSS-11-525	.120"	5" SQ.	25'	11 3/4"	3/4"	12"	3/4x24x3	10	230#
<input type="radio"/>	SSS-11-527	.120"	5" SQ.	27'	11 3/4"	3/4"	12"	1x36x4	8	246#
<input type="radio"/>	SSS-11-530	.120"	5" SQ.	30'	11 3/4"	3/4"	12"	1x36x4	5	272#
<input type="radio"/>	SSS-7-520	180"	5" SQ.	20'	11 3/4"	3/4"	12"	1x36x4	23	266#
<input type="radio"/>	SSS-7-522	180"	5" SQ.	22'	11 3/4"	3/4"	12"	1x36x4	20	290#
<input type="radio"/>	SSS-7-524	180"	5" SQ.	24'	11 3/4"	3/4"	12"	1x36x4	18	314#
<input type="radio"/>	SSS-7-525	180"	5" SQ.	25'	11 3/4"	3/4"	12"	1x36x4	16	326#
<input type="radio"/>	SSS-7-527	180"	5" SQ.	27'	11 3/4"	3/4"	12"	1x36x4	13	350#
<input type="radio"/>	SSS-7-530	180"	5" SQ.	30'	11 3/4"	3/4"	12"	1x36x4	11.8	386#