CM2084-T JASPER

2'x4' Tunable



VisaLighting.com/products/Jasper


Type: Project: Location:



DIMENSIONS

W = Width L = Length RD = Recessed Depth


L 47-3/4" (1213 mm)
W 23-4/5" (605 mm)
RD 3" (76 mm)
RD 3-1/2" (89 mm) (IEM option)

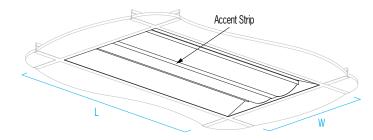


FEATURES

- Integral driver
- Multiple levels of lumen output
- Low plenum depth enables use in "busy" recessed plenums or retrofit projects
- Mounts to standard 15/16", 9/16", or screw-slot grid ceiling systems
- Integral T-bar retaining clips
- Integral mounting points for suspension cables (by others) to building structure
- Optional NEC Article 410 compliant "earthquake clips" (EQC option)
- Optional flange kit for mounting to drywall ceilings (**SRI** option)
- Extruded, frosted acrylic lens with diffusing optical film
- Die-formed enclosure
- Fabricated aluminum accent strip available in Non VOC powder coat, brushed aluminum, and eight exclusive, eco-friendly alternative finishes
- Not suitable for insulation contact
- ETL listed for damp locations. Not suited for exterior applications

RELATIVE SCALE DRAWING



PHOTOMETRICS







CM2084-T JASPER (cont.)





WHIP

Fill in shaded boxes using information listed below CM2084-T OPTION(S)4 MODEL SOURCE1 **VOLTAGE² SOURCE OPTION3 ACCENT STRIP** TUN2(H) MVOLT IEM FINISH DCC TUN2(L) 347V EQC TUN2(VL) Not available SRI See last page for

with 347V

SOURCE¹ (Select one)

Dimmable 0-10V to 10%, Minimum 90CRI, within 3-step MacAdam

Source	CCT Range	Delivered Lumens	Power (Watts)
TUN2(H)		5800	50
TUN2(L)	2700K - 6500K	3800	33
TUN2(VL)		1950	16

Lumens data shown is at at 3500K. Lumens can vary slightly as CCT changes

VOLTAGE² (Select one)

MVOLT	120-277V, 50/60 Hz	
347V	50/60 Hz (Not available with IEM option)	

finish order codes

LUMEN MAINTENANCE RATING

L80 (reported)	>50,000 hrs

Reported Lifetime per IES TM-21

SOURCE OPTION³

A Option availability may be interdependent with Voltage, Source or Other Options

-		<u> </u>
	IEM	90-minute emergency battery pack supplying 10W of power to light sources
		(multiply fixture delivered lumens per watt by 10 watts for nominal emergency
		mode lumen output) (Not available with 347V option)

OPTION(S)⁴ (Multiple selections allowed)

DCC	Damp clear coat for metal finishes (required for 5 year warranty when used in damp locations)
EQC	"Earthquake clip" t-bar mounting brackets (2 provided)
SRI	Drywall ceiling mounting kit
WHIP	Pre-wired 6-foot long 18AWG flex conduit whip, conductors per fixture configuration (contact factory for details)

CM2084-T JASPER (cont.) 2'x4' Tunable



JASPER PRODUCT FAMILY

- CM2082-W 2'x2' White
- CM2082-T 2'x2' Tunable
- CM2084-W 2'x4' Tunable
- CM2084-T 2'x4' Tunable
- CM2094 2'x4' Overbed

See <u>Visalighting.com/Products/Jasper</u> for more information

SUGGESTED VARIATION

• Custom colors

CM2084-T JASPER (cont.)

2'x4' Tunable



FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are <u>available upon request</u>. For more information about our finishes visit visalighting.com/finishes

Powder Coat Paint Finishes (Standard)



Alternative Metal Finishes (Premium)



Metal Finish (Premium)



BA Brushed Aluminum