


CP6000 Sequence™ Mini

Vertical Suspension


VisaLighting.com/products/Sequence-Mini

Type: _____ Project: _____ Location: _____

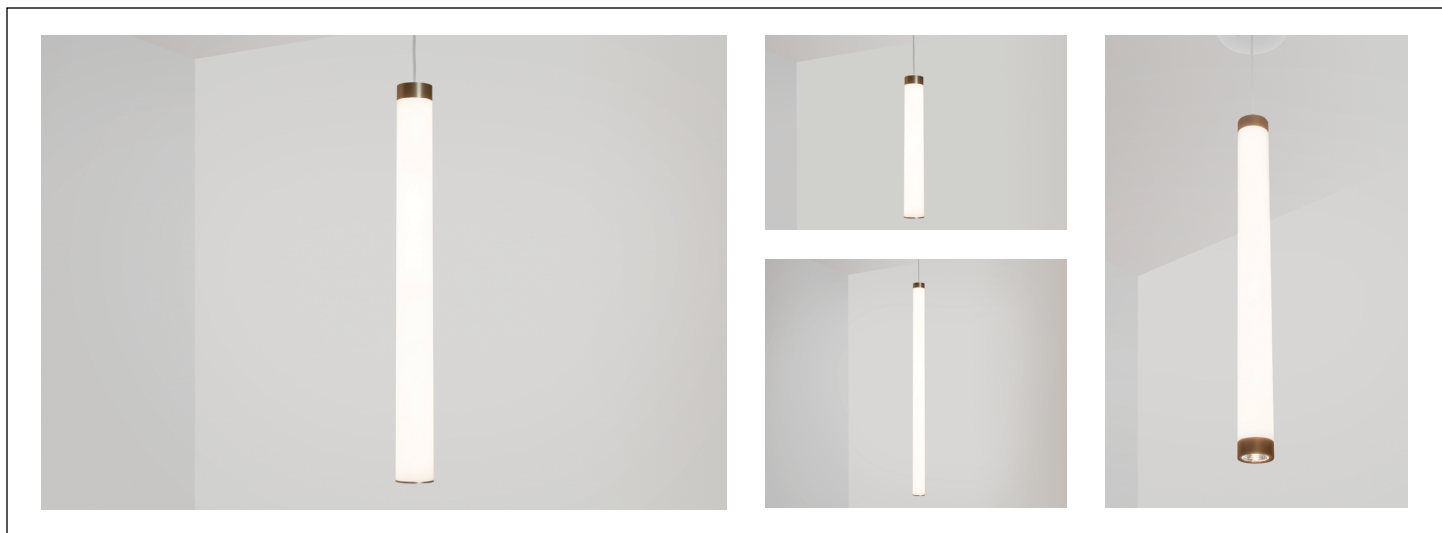

DIMENSIONS⁹



OAH MUST BE SPECIFIED

DIA = Diameter OAH = Overall Height X = Body Length WT = Weight

OAH is the distance (in inches) from the bottom of the fixture to the ceiling plane. Example - OAH(192) indicates an overall fixture height of 192"

DIA	2-1/4"	(57 mm)
OAH	96"	(2438 mm)
MIN OAH	X + 3"	(X + 76 mm)
X	12" – 72"	(305 mm – 1829 mm)
WT	1 lb – 6 lbs	(454 g – 2722 g)


RELATIVE SCALE DRAWING

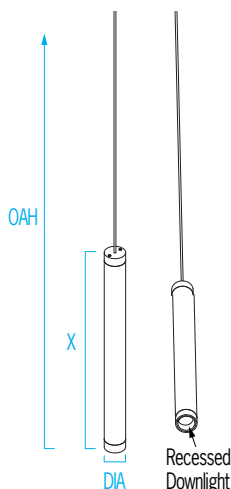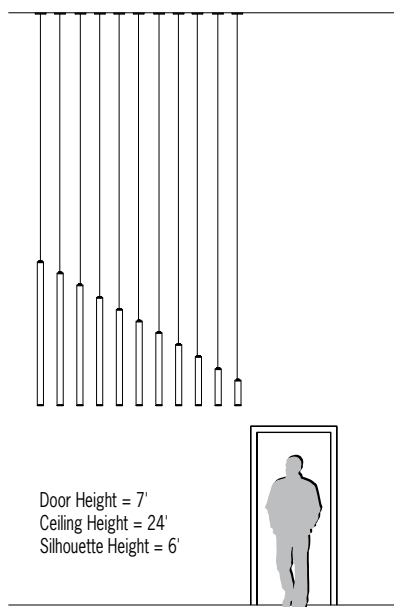


FEATURES

- Varying lengths, from 12" to 72", in 6" increments
- Optional downlight, 0-10V dimmable (controls by others), with narrow, medium, or wide optical distribution
- Endcaps machined from raw 2.25" DIA Aluminum billet
- Remote Driver Enclosure (RMD) is available for all lengths. Round canopy is 5-1/4" diameter and 1/2" deep.
- Driver in canopy (SDC) is available for lengths 24" and longer. Round canopy is 6-3/8" diameter and 1-1/2" deep.
- Canopy for both (RMD) or (SDC) mounts over 4x4 junction box (by others) with provided hardware and is painted white
- Suspended with 1/4" diameter white power cord
- Matte white acrylic body
- No VOC powder coat finish or low VOC clear coat on metal finishes
- ETL listed for damp locations. Not suited for exterior applications


PHOTOMETRICS




Bodylight

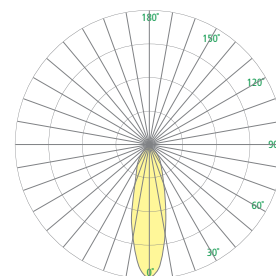

Downlight Optic NRW 27° Beam



Downlight Optic MED 33° Beam

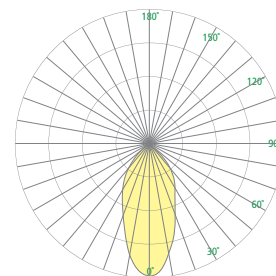

Downlight Optic WIDE 48° Beam



ETL Listed

5 Year Warranty

800-788-VISA

VisaLighting.com

Page 1

CP6000 Sequence Mini (cont.)

Vertical Suspension



Fill in shaded boxes using information listed below

CP6000

MODEL	LENGTH ¹	BODYLIGHT ²	OPTIONAL DOWNLIGHT ³	OPTIONAL DOWNLIGHT OPTIC ⁴	VOLTAGE ⁵	OPTIONAL DIMMING CONTROL ⁶	FINISH	DRIVER ⁷	OPTION ⁸	OAH ⁹
	12 48 18 54 24 60 30 66 36 72 42	L30K L35K L40K	LOW HIGH	MED NRW WIDE	MVOLT 347V	DALI	See last page for finish order codes	SDC RMD	DCC	See page 1

Custom lengths available from 12" to 72" in length in 1" nominal increments; contact factory

Required for downlight option

Dimmable 0-10V to 1% if option not selected

BODYLIGHT SOURCE (Select one length¹ and one source²)

Minimum 80CRI, within 3-step MacAdam

Bodylight Source ²	L30K	L35K	L40K	Power (Watts) (Body)
CCT	3000K	3500K	4000K	
Length ¹	Delivered Lumens (Body)			
12"	650	700	700	7
18"	1000	1100	1100	10
24"	1400	1500	1600	14
30"	1800	1900	2000	17
36"	2200	2300	2500	21
42"	2600	2800	2900	24
48"	3000	3200	3300	28
54"	3400	3600	3800	31
60"	3800	4000	4200	35
66"	4200	4500	4700	39
72"	4600	4900	5100	42

Bodylight and downlight are separately switched and controlled/dimmed

LUMEN MAINTENANCE RATING

Bodylight	L80 (reported)	>72,000 hrs
Downlight	L80 (reported)	>55,000 hrs


OPTIONAL DOWNLIGHT³ AND OPTIC⁴

Fixture bottom is solid if no downlight is specified. Downlight adds an extra 1" to overall length. CCT matches bodylight selection Minimum 80CRI, within 3-step MacAdam

	Delivered Lumens		Power (Watts)
	L30K/L35K	L40K	
LOW	800	850	8
HIGH	1500	1600	17

Downlight Optic	
NRW	27° Beam
MED	33° Beam
WIDE	48° Beam

DIMENSIONS WITH DOWNLIGHT CP6000 – 24" EXAMPLE



Downlight adds an extra 1" to overall height (OAH)

VOLTAGE⁵ (Select one)

MVOLT	120-277V, 50/60 Hz
347V	50/60 Hz Not available with DALI or SDC options

Options continued on Page 3

CP6000 Sequence Mini (cont.)

Vertical Suspension



DIMMING CONTROL OPTION⁶

0-10V dimming to 1% is included unless DALI option is selected

▲ Option availability may be interdependent with Voltage, Source or Other Options

DALI	Dimming control capability (to 5%) via DALI 1.0 protocol (not available with 347V or SDC option)
-------------	--


DRIVER⁷ (Select one)

▲ Availability may be interdependent with Voltage, Source or Other Options


SDC	Surface canopy with integral driver; canopy is painted white (not available with 347V or DALI option; not available on 12" and 18" lengths)
RMD	Remote driver enclosure, has knockouts for conduit connection, may be recess mounted with insulation contact (type IC); canopy is painted white

REMOTE DRIVER (RMD) INFORMATION

8" RMD box is used for 24" to 72" lengths

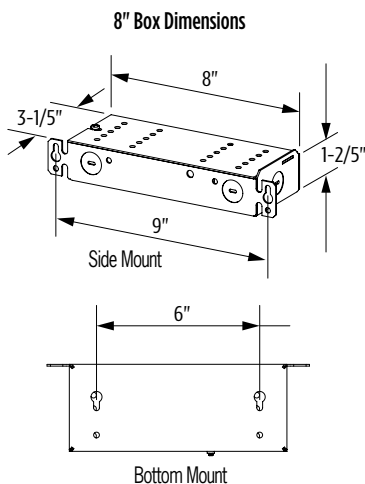

18" RMD box is used for any of these lengths: 12" & 18" lengths, DALI dimming, 347V

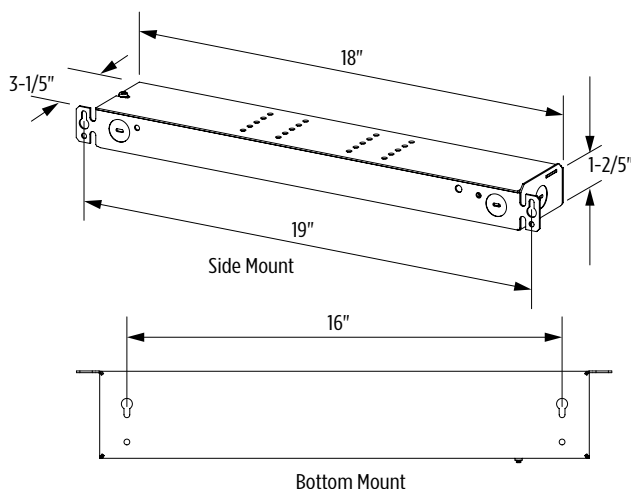

Remote driver boxes have knockouts for conduit connections

Maximum Recommended Remote Wiring Distance from RMD to fixture canopy

- 12GA 190 ft
- 14GA 120 ft
- 16GA 75 ft
- 18GA 45 ft
- 20GA 30 ft


OPTION⁸

▲ Option availability may be interdependent with Other Options



DCC	Damp clear coat for metal finishes (required for 5 year warranty when used in damp locations)
------------	---

DRIVER DETAIL

Remote Driver (RMD)



Surface Canopy with Integral Driver (SDC)

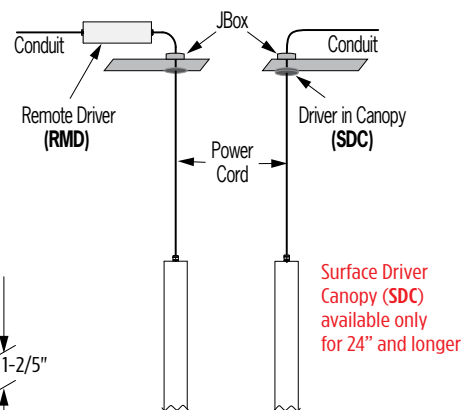

Surface Driver Canopy (SDC) available only for 24" and longer

CP6000 Sequence Mini (cont.)

Vertical Suspension



SEQUENCE PRODUCT FAMILY

Wall Units	<ul style="list-style-type: none"> • CB5201 — 34 In Indoor Wall • CB5203 — 45 In Indoor Wall 		
4" Diameter Pendants	<ul style="list-style-type: none"> • CP2020 — 4 In x 2 Ft • CP2022 — 4 In x 3 Ft • CP2024 — 4 In x 4 Ft • CP2026 — 4 In x 5 Ft • CP2028 — 4 In x 6 Ft • CP2030 — 4 In x 8 Ft 	Outdoor 8" Diameter Pendants <ul style="list-style-type: none"> • OP2252 — 8 In x 2 Ft Canopy • OP2253 — 8 In x 3 Ft Canopy • OP2254 — 8 In x 4 Ft Canopy • OP2262 — 8 In x 2 Ft Catenary • OP2263 — 8 In x 3 Ft Catenary • OP2264 — 8 In x 4 Ft Catenary 	
		Outdoor Wall Units	<ul style="list-style-type: none"> • OW5201 — 34 In Outdoor Wall • OW5203 — 45 In Outdoor Wall
8" Diameter Pendants	<ul style="list-style-type: none"> • CP2036 — 8 In x 2 Ft • CP2038 — 8 In x 3 Ft • CP2040 — 8 In x 4 Ft • CP2042 — 8 In x 5 Ft • CP2044 — 8 In x 6 Ft • CP2046 — 8 In x 8 Ft 	4" Indoor Sequence Square	<ul style="list-style-type: none"> • CP5820 — 4 in x 2 ft • CP5822 — 4 in x 3 ft • CP5824 — 4 in x 4 ft • CP5826 — 4 in x 5 ft • CP5828 — 4 in x 6 ft • CP5830 — 4 in x 8 ft
12" Diameter Pendants	<ul style="list-style-type: none"> • CP2052 — 12 In x 2 Ft • CP2054 — 12 In x 3 Ft • CP2056 — 12 In x 4 Ft • CP2058 — 12 In x 5 Ft • CP2060 — 12 In x 6 Ft • CP2062 — 12 In x 8 Ft 	8" Indoor Sequence Square	<ul style="list-style-type: none"> • CP5836 — 8 in x 2 ft • CP5838 — 8 in x 3 ft • CP5840 — 8 in x 4 ft • CP5842 — 8 in x 5 ft • CP5844 — 8 in x 6 ft • CP5846 — 8 in x 8 ft
Outdoor 4" Diameter Pendants	<ul style="list-style-type: none"> • OP2222 — 4 In x 3 Ft Canopy • OP2223 — 4 In x 4 Ft Canopy • OP2224 — 4 In x 5 Ft Canopy • OP2232 — 4 In x 3 Ft Catenary • OP2233 — 4 In x 4 Ft Catenary • OP2234 — 4 In x 5 Ft Catenary 	Vertical Sequence Mini	<ul style="list-style-type: none"> • CP6000 — 2 in; various lengths
		Horizontal Sequence Mini	<ul style="list-style-type: none"> • CP6002 — 2 in; various lengths

SUGGESTED VARIATIONS

- Custom lengths/lumen outputs
- Alternative downlight bezel and end cap color
- Multi-fixture clusters via custom multi-point canopies
- Angled mounting via additional hang cable

See [Visalighting.com/Sequence](https://visalighting.com/Sequence), [Visalighting.com/Sequence-Square](https://visalighting.com/Sequence-Square) and [Visalighting.com/Sequence-Mini](https://visalighting.com/Sequence-Mini) for more information

CP6000 Sequence Mini (cont.)

FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#).

For more information about our finishes visit visalighting.com/finishes


Powder Coat Paint Finishes (Standard)

						
AGGY Agate Grey	ALGN Alpine Green	BJBG Baja Beige	BMAT Bronze Matte	BRNZ Bronze	BSIL Blade Silver	CVBL Cove Blue
						
DEOR Deoro Gold	GLWT Glacier White	GSIL Graphite Silver	HRGR Harbor Grey	JTBK Jet Black	OCBL Ocean Blue	SHGR Shoreline Grey
						
SBGN Sagebrush Green	SLGR Slate Grey	SSTP Sierra Taupe	TRCN Terracotta Canyon	TRWT Traffic White	VLBK Velvet Black	VNRD Vineyard Red

Alternative Metal Finishes (Premium)

			
BBA Brushed Brass Alternative	BCA Brushed Chrome Alternative	BUA Brushed Copper Alternative	BZA Brushed Bronze Alternative
			
OBA Oil-Rubbed Bronze Alternative	PRA Pewter Alternative	RBA Rustic Brass Alternative	SNA Satin Nickel Alternative

Metal Finish (Premium)


BA Brushed Aluminum