










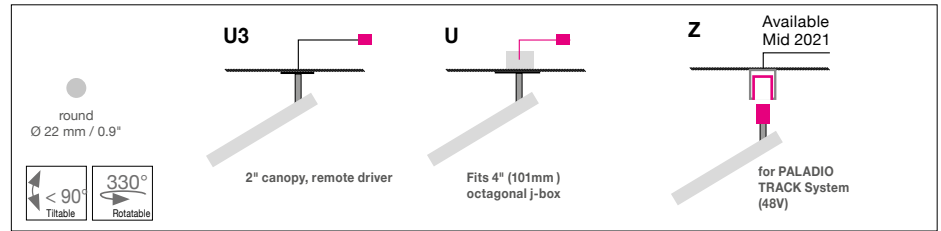







FINO SPOT 2

Housing: Spotlight, solid Aluminum housing, 330° hinge
Design: Ulrich Sattler



Available
Mid 2021




	Size: Ø / L mm	Inches	LED Watt	Lumen ¹⁾	Weight ²⁾ kg/lbs	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
Size	Ø 22 / L 165 mm	Ø 0.9 / L 6.5"	5	365	0,4 / 0.88	1539.	x x .	x x .	x x .	x x .	x x x .	x x
LED		Standard: Warm-white 3000 K				x x x .	30.	x x .	x x .	x x .	x x x .	x x
CRI > 90		Optional: Neutral-white 4000 K Extra warm-white 2700 K				x x x . x x x .	40. 27.	x x . x x .	x x . x x .	x x . x x .	x x x . x x x .	x x x x
Dimming		Standard: 0-10V   				x x x .	x x .	51.	00.	x x .	x x x .	x x
Finish						x x x .	x x .	x x .	x x .		x x x .	x x
Standard:	66 bronze anodized brushed	Optional: 60 silver anodized brushed	62 black anodized brushed	65 champ. gold anodized brushed	12 white, powder coated, similar RAL 9003							
Mounting version	 2" for remote driver	 5" - Fits 4" octagonal j-box Remote mounted driver	 Mounting with adapter for 48V PALADIO TRACK System Available mid 2021			x x x .	x x .	x x .	x x .	x x .	x x x .	

Canopy:			
Type		For use with Mounting version	Protective rating
DA 50	2" for remote driver	U3	IP40
DA 125	5" - 4" octagonal j-box	U	IP40
Remote mounted ECO30W-350 LED driver (included in price)			
Input voltage for all external power supply units is 120-277 VAC 50-60 Hz.			

Complete order number

1539.	--	--	00.	--	000.	--
--------------	----	----	------------	----	-------------	----

+ ECO30W-350



Remote mounted driver enclosure
13.25" (L) x 5" (W) x 2.25" (H)
surface mount in any orientation

Maximum Wiring Distance Guide*

Wire Gauge	Maximum Lead Length
18	72 ft (22 m)
16	118 ft (36 m)
14	150 ft (46 m)
12	200 ft (61 m)

*Actual distance must be calculated by installer.
Must comply with NEC code.

