


Job Name: _____	Client Name: _____
Job Location - City: _____ State: _____	Created By: _____ Date: _____
Product: _____ Quote: _____	Customer Approval: _____ Date: _____

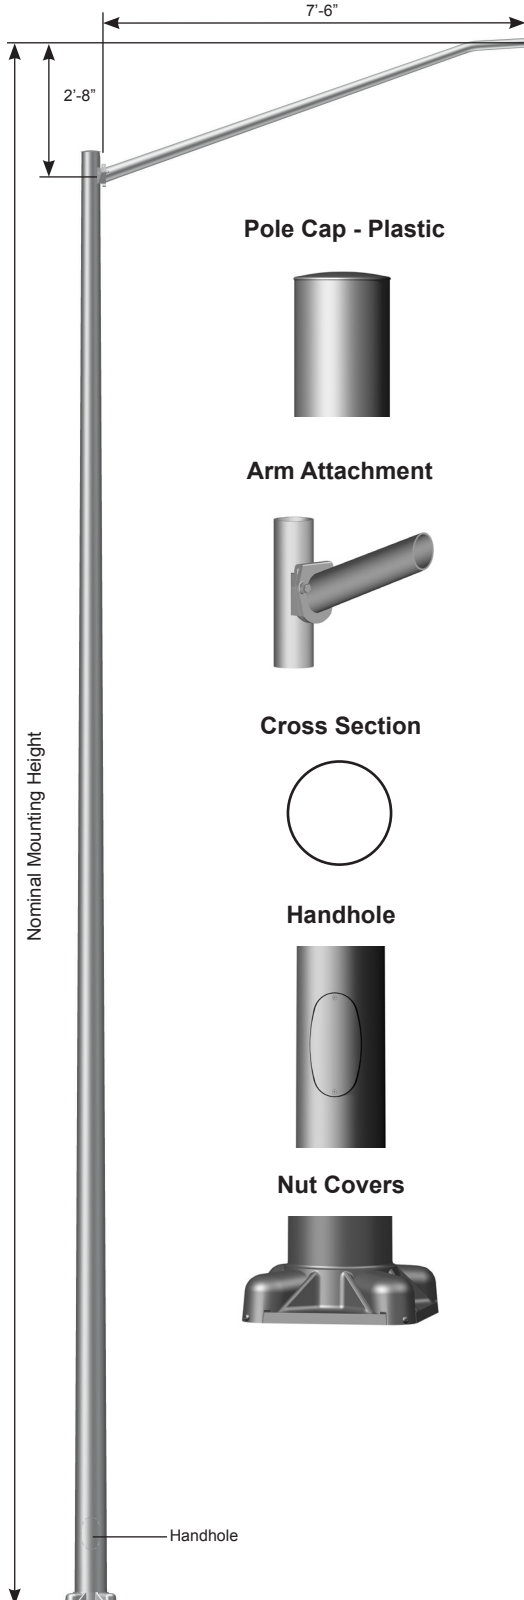

SPECIFICATIONS

Pole - The pole shaft is extruded from seamless alloy aluminum.

Pole Top - A removable pole cap is provided.

Luminaire Arm - Luminaire arms are conically tapered from seamless alloy aluminum to 2.38" OD at the luminaire end.

Luminaire Arm Attachment - Connection allows arm to be erected and held in place by gravity and secured by two bolts.

Handhole - A covered handhole with hardware and grounding provision are provided.

Base Cover - Optional decorative base covers available as special order.

Anchor Base - The anchor base is cast from 356 alloy aluminum. The completed assembly is heat-treated to a T6 temper. Aluminum nut covers are included with anchor base unless otherwise specified.

Anchor Bolts - Anchor bolts conform to ASTM F1554 Grade 55 and are provided with two hex nuts and two flat washers. Bolts have an "L" bend on one end and are galvanized a minimum of 12" on the threaded end.


Hardware - All structural and non-structural fasteners are stainless steel.

Finish - The standard finish for the pole assembly and components is satin brushed, natural anodize, duranodic or polyester powder applied coating in accordance with Valmont's Specifications. Additional finish options available upon request.

Design Criteria - Please reference Design Criteria Specification for appropriate design conditions.

ARM DATA

Ovalized Arm Cross Section



ROUND TAPERED ALUMINUM

Elliptical Mast Arm

8' Single - Double Bolt Mount

valmont


STRUCTURES

Job Name: _____	Client Name: _____
Job Location - City: _____ State: _____	Created By: _____ Date: _____
Product: _____ Quote: _____	Customer Approval: _____ Date: _____

ANCHORAGE DATA

POLE		BASE PLATE				ANCHOR BOLTS		
BASE OD (IN)	WALL THK (IN)	BOLT CIRCLE		SQUARE (IN)	THK (IN)	DIA x LENGTH x HOOK (IN)	PROJECTION (IN)	± (IN)
		DIA (IN)	± (IN)					
6.00	0.156	9.50	0.75	10.32	0.630	0.75 x 17.00 x 3.00	3.50	N/A
6.00	0.188	9.50	0.75	10.32	0.630	0.75 x 17.00 x 3.00	3.50	N/A
7.00	0.156	10.56	0.43	11.26	0.750	1.00 x 36.00 x 4.00	4.13	N/A
8.00	0.156	11.63	0.37	12.05	0.750	1.00 x 36.00 x 4.00	4.13	N/A
8.00	0.188	11.63	0.37	12.05	0.750	1.00 x 36.00 x 4.00	4.13	N/A
8.00	0.250	11.63	0.37	12.05	0.750	1.00 x 36.00 x 4.00	4.13	N/A
9.00	0.156	13.25	0.75	12.48	1.250	1.00 x 36.00 x 4.00	4.13	N/A
9.00	0.188	13.25	0.75	12.48	1.250	1.00 x 36.00 x 4.00	4.13	N/A

Anchor Base Detail

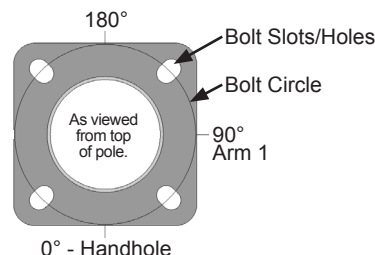

LOAD AND DIMENSIONAL DATA

DESIGN INFORMATION							POLE DIMENSIONS					STRUCTURE WEIGHT ² (LBS)	MODEL NUMBER
NOMINAL MOUNTING HEIGHT	MAX WEIGHT ¹ (LBS)	70 MPH w/1.3 GUST MAX EPA ¹ (SQ FT)	80 MPH w/1.3 GUST MAX EPA ¹ (SQ FT)	90 MPH w/1.3 GUST MAX EPA ¹ (SQ FT)	100 MPH w/1.3 GUST MAX EPA ¹ (SQ FT)	110 MPH w/1.3 GUST MAX EPA ¹ (SQ FT)	POLE HEIGHT	BASE OD (IN)	TOP OD (IN)	WALL THK (IN)			
20'-0"	65	4.5	3.2	2.4	1.7	1.3	17'-8"	6.00	4.00	0.156	72	1MA0832S-170840605T4	
25'-0"	50	4.5	3.2	1.9	0.8	N/A	22'-8"	6.00	4.00	0.156	86	1MA0832S-220840605T4	
	60	4.5	3.2	2.4	1.7	1.0	22'-8"	6.00	4.00	0.188	98	1MA0832S-220840606T4	
	65	4.5	3.2	2.4	1.7	1.3	22'-8"	7.00	4.00	0.156	94	1MA0832S-220840705T4	
30'-0"	50	4.5	3.2	2.0	0.8	N/A	27'-8"	7.00	4.00	0.156	110	+1MA0832S-270840705T4	
	75	4.5	3.2	2.4	1.7	1.3	27'-8"	8.00	4.50	0.156	123	1MA0832S-270845805T4	
35'-0"	70	4.5	3.2	2.1	0.9	N/A	32'-8"	8.00	4.50	0.156	142	+1MA0832S-320845805T4	
	75	4.5	3.2	2.4	1.7	1.2	32'-8"	8.00	4.50	0.188	166	1MA0832S-320845806T4	
	75	4.5	3.2	2.4	1.7	1.3	32'-8"	8.00	4.50	0.250	211	1MA0832S-320845808T4	
	75	4.5	3.2	2.4	1.7	1.3	32'-8"	9.00	4.50	0.156	157	+1MA0832S-320845905T4	
	75	4.5	3.2	2.4	1.7	1.3	32'-8"	9.00	4.50	0.188	183	1MA0832S-320845906T4	
39'-0"	75	4.5	3.2	1.9	0.7	N/A	36'-8"	8.00	4.50	0.188	188	+1MA0832S-360845806T4	
	75	4.5	3.2	2.4	1.2	N/A	36'-8"	9.00	4.50	0.156	178	+1MA0832S-360845905T4	
	75	4.5	3.2	2.4	1.7	1.3	36'-8"	8.00	4.50	0.250	239	1MA0832S-360845808T4	
	75	4.5	3.2	2.4	1.7	1.3	36'-8"	9.00	4.50	0.188	207	+1MA0832S-360845906T4	

- EPA represents the Effective Projected Area of each luminaire. Designs are limited to one luminaire per arm. Variations from sizes above are available upon inquiry at the factory. Satisfactory performance of poles is dependent upon the pole being properly attached to a supporting foundation of adequate design.
- Structure weight is a nominal value which includes the pole shaft, base plate and luminaire arm(s).
+ Pole includes factory installed vibration damper.

PRODUCT ORDERING CODES

CROSS SECTION	MODEL NUMBER	COLOR		OPTIONS
R				
R = Round	1MA0832S-170840605T4 1MA0832S-220840605T4 1MA0832S-220840606T4 1MA0832S-220840705T4 +1MA0832S-270840705T4 1MA0832S-270845805T4 +1MA0832S-320845805T4 1MA0832S-320845806T4 1MA0832S-320845808T4 +1MA0832S-320845905T4 1MA0832S-320845906T4 +1MA0832S-360845806T4 +1MA0832S-360845905T4 1MA0832S-360845808T4 +1MA0832S-360845906T4	Polyester Powder DWH = White DSS = Sandstone BR = Burgundy HG = Hunter Green DNA = Natural Aluminum DCG = Charcoal Gray DMB = Medium Bronze SBN = Sanded Brown DNB = New Dark Bronze DDB = Dark Bronze SBK = Sanded Black DBL = Black DSB = Steel Blue DTG = Dark Green DBR = Red SC = Special Color (Contact Factory)	Anodized 204 = Clear Natural 311 = Light Bronze* 312 = Medium Bronze* 313 = Dark Bronze* 335 = Black* *Duranodic Anodize Brushed SBF = Satin Brushed	See Accessories at valmontstructures.com (Please Specify with Code)