

## NEW YORK EXIT - LED EXIT SIGNS

### Die Cast Aluminum

Die Cast Aluminum LED exit sign with 8" letters meets the NYC requirements. Durable Die Cast Aluminum construction makes the Telesis TDNY suitable for use in all interior spaces.

#### Construction

- Die cast aluminum housing with field selectable chevrons
- Universal mounting pattern on back plate for wall mounting
- Mounting canopy is included for top or end mounting
- Available in white or black powder coat, or all brushed aluminum housings
- Options available include tamper resistant access screws, self-test, self-diagnostics (em models) dual circuit input (ac only models)

#### Electrical

- 4.8V long life, maintenance free, rechargeable Nickel Cadmium battery
- Minimum 90 minute run time in the emergency mode
- Fully automatic solid state transfer relay transfers the battery to the LED board in the event of a power failure
- Solid state fully automatic two rate charger, recharges the battery in 24 hours upon restoration of utility power

#### Illumination

- New York approved 8" red letters with 1" stroke
- Long life high brightness Red LED's provide uniform illumination


#### Certification

- UL Listed for damp locations 0° to 50° C
- Listed by Underwriters Laboratories to UL 924, meets NFPA 101, NFPA 70-NEC, New York City approved
- California Energy Commission (CEC) Title 20 Compliant



#### Warranty

- 5 year limited warranty on battery and electronics

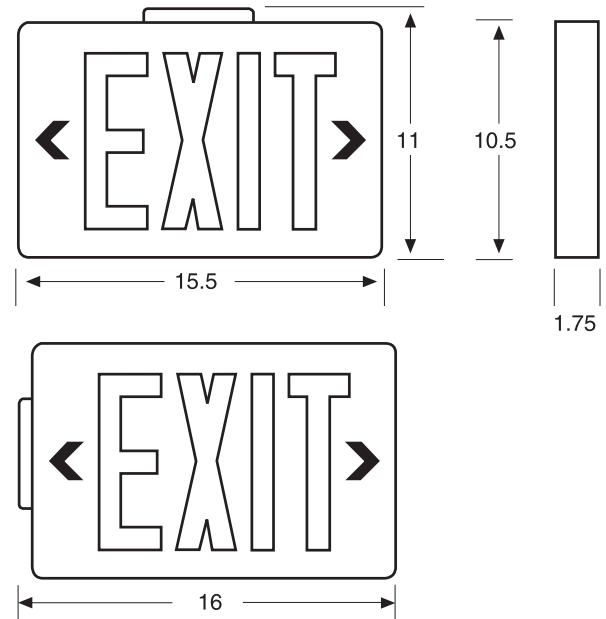

| Model | Input Watts |      | Input Current |       |
|-------|-------------|------|---------------|-------|
| TDNY  | 120V        | 277V | 120V          | 277V  |
|       | 5.0         | 5.0  | 0.041         | 0.018 |

#### ORDERING GUIDE – TDNY

Example: TDNY-EM-R-1-AB-SD

| Model                          | Operation                                   | Letter | No. of Faces   | Body Color  | Mounting   | Options   |
|--------------------------------|---|--------|--|---|--|---|
| TDNY Telesis Die Cast Aluminum | AC AC Only 120/277 VAC<br>EM Battery Backup | R Red  | 1 Single<br>2 Double<br>U Universal Single/<br>Double Face | AB Brushed Face<br>Black Body<br>BB All Black<br>WW All White<br>AA All Brushed<br>Aluminum | Canopy Mounting<br>Kit Included<br>for top<br>or end<br>mounting | DK* Two Circuit Input 120 or 277 V (AC<br>models)<br>SD Self-Test / Self-Diagnostic (EM Models)<br>*Note: Dual circuit cannot be used with two<br>live circuits |
| TDNY                           |   |        |  |   |  |   |

Fill in fields from categories above and complete type and part number.

Type Number:

Full Part Number:

TDNY - 5/5/23