

## SCHL - 10-20 Watts Metal

### Chicago Approved Steel LED Emergency Unit

SCHL is a Chicago Approved Steel LED Emergency Unit featuring LVD (low voltage disconnect) and internal solid-state transfer switch. The fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours. The housing is constructed from durable 20-gauge steel.

#### Construction

- Knockouts on the back for wall mount
- Side and top knockouts for conduit feed applications
- Durable 20-gauge steel construction
- White standard or optional black finish

#### Electrical

- Dual 120/277 selectable input voltage
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- LVD (low voltage disconnect) prevents battery from deep discharge
- 6V sealed lead acid, maintenance-free, rechargeable battery
- Internal solid-state transfer switch automatically connects the internal battery to the LED lamp heads for minimum 120-minute emergency illumination
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours

#### Illumination

- Two, 6V, 5.3W adjustable white LED lamp heads 349 Lumens per head
- Remote capacity of 10W standard on 20W models


#### Certification

- UL Listed for damp locations (20°C to 50°C)
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes
- Meets City of Chicago requirements



#### Warranty

- Five year warranty on all electronics and housing. Battery pro rated for two years.

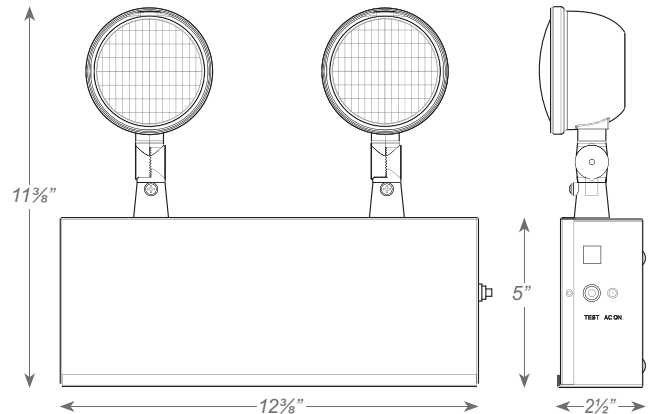

### ORDERING GUIDE - SCHL

Example: SCHL-20-W

Model	Wattage	Housing Color
SCHL	10 10 Watts 20 20 Watts (10 watt remote)	W White (standard) B Black (optional)
SCHL		

Fill in fields from categories above and complete type and part number.

Type Number:

Full Part Number:

SCHL - 8/31/22