

ANYBEND-DW

Q-CAP Flexible Fixtures - MICRO 5 SERIES




ANYBEND-DW is a fully encapsulated flexible linear LED fixture suitable for use in a variety of applications. Because of its dry and wet rating, it is perfect for not only indoor use but also as outdoor accent lighting where the fixture is visible. ANYBEND-DW encapsulates our 24-volt dynamic white LED strips in polyurethane. Offered in high output (2.0W/ft per channel). ANYBEND-DW has a unique up/down and side bend with a 9" bending radius and it is compatible with three different mounting hardware options to ensure our product fits any design need. Utilize clear endcaps for continuous runs with no light loss.

Output [Calculated L70 = 40000 hours]

Tested for ANBD-DW-WSC-DRY

CCT	SO Standard Output				Circuit Wattage
	ENC/CL		ENC/TL		
	LM	CRI	LM	CRI	
2400K	140	94	135	93	1.90
2700K	140	94	130	92	1.90
3000K	148	96	136	96	1.90
4000K	158	98	138	98	1.90

Dimensions



Profile (Standard)

Wiring Detail



2" increments from 2"-191"

Part Number Builder

Product	Mounting	Rated	CCT	Output	Lens	Type	Connector/ Wire in	Connector/ Wire out	End Caps (No feed)	Length (in)
ANBD-DW				SO						
Voltage: 24 VDC Wattage: 2.0W/ft (per channel) 4.0W/ft (total load)										
ENCAPSULATED PRODUCTS ARE NOT FIELD CUTTABLE										
WSC PPS-2 PPS-96 PPS-FT PPS-LP-2 PPS-LP-96 PPS-LP-FT										
DRY (IP20) WET (IP67)										
24/30 27/40										
SO										
ENC/CL ENC/TL										
Single (Closed exit) Pass through										
S1A S1B										
P1A P1B										
BW CON6 CON24										
BW CON6 CON24										
N/A										
BW CON6 CON24										
N/A										
CL WH										
N/A										

- BW comes in standard 24" - request custom length (Max 120") by writing it in inches next to "BW" in the order code box (ex. BW48)
- Connector/Wire In or Out not needed to specify product. Standard configuration is type S1, Connector/Wire In: BW & Connector/Wire Out: N/A with white endcaps (WH)

Flexibility




- Field modifications are not covered under Q-Tran warranty
- 5 year warranty
- Up/Down, Side Bend
- Data subject to change, all data has +/- 5% tolerance
- PPS-FT and PPS-LP-FT is to be cut at Q-Tran to requested length

ANYBEND-DW Q-CAP Flexible Fixtures - MICRO 5 SERIES




Mounting NOTE: 2 white snug clips provided per first 12", 1 for each additional 12". Other mounting styles incur additional charge, see price guide for details.

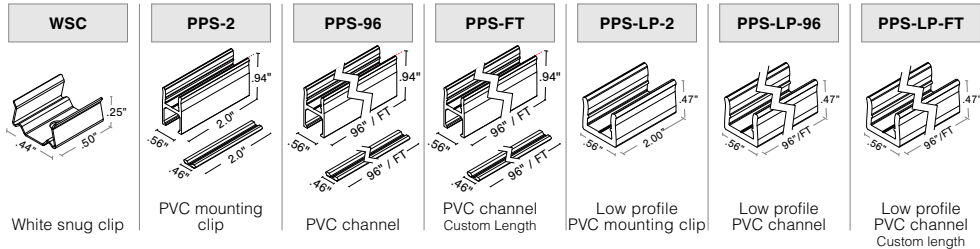


Ambient Temperature Limits

ANYBEND		Minimum (°F)	Maximum (°F)
4W	Millwork	-4	77
	Surface Mount	-4	95


End Caps (No Feed)



End Caps (With Feed)




Bend Radius




Type NOTE: Use appropriate Type options to account for power feed locations and desired light throw direction


SINGLE (Input only)

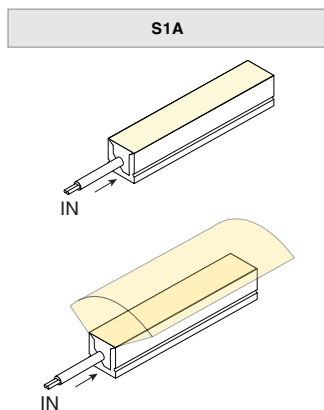


PASS THROUGH (Input/Output)

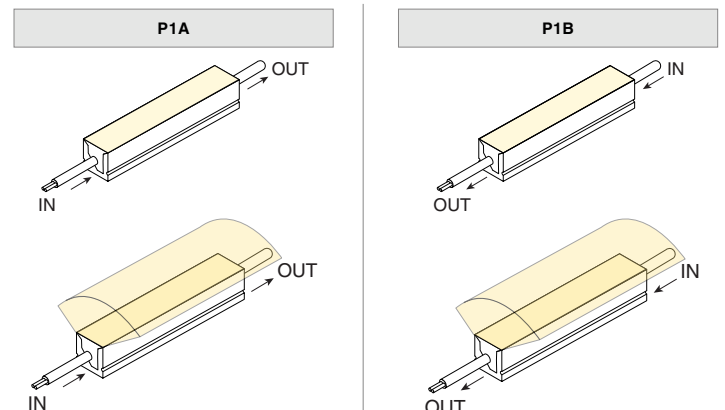

Connector/Wire – In/Out

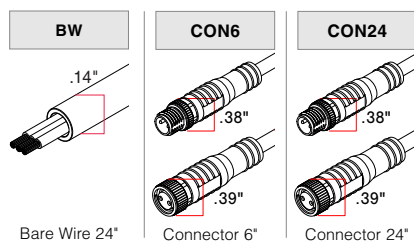

Lens with LED visibility



Compatible Power Supplies

See website for additional power supply options

