

ANYBEND-SW

Q-CAP Flexible Fixtures - MICRO 5 SERIES




ANYBEND-SW is a fully encapsulated flexible linear LED fixture suitable for use in a variety of applications. Because of its dry and wet rating, it is perfect for not only indoor use but also as outdoor accent lighting where the fixture is visible. ANYBEND-SW encapsulates our 24-volt static white LED strips in polyurethane. Offered in three different outputs: standard output (1.0W/ft), high output (2.0W/ft), and very high output (4.0W/ft). ANYBEND-SW has a unique up/down and side bend with a 9" bending radius and it is compatible with three different mounting hardware options to ensure our product fits any design need. Utilize clear endcaps for continuous runs with no light loss.

Output [Calculated L70 = 40000 hours]

Tested for ANBD-SW-WSC-DRY


CCT	SO Standard Output 1 W/ft				HO High Output 2 W/ft				VHO Very High Output 4 W/ft			
	ENC/CL		ENC/TL		ENC/CL		ENC/TL		ENC/CL		ENC/TL	
	LM	CRI	LM	CRI	LM	CRI	LM	CRI	LM	CRI	LM	CRI
2400K	44	93	49	92	120	93	131	92	260	93	253	93
2700K	48	96	32	98	133	97	85	98	283	97	186	98
3000K	52	95	47	96	140	95	127	97	300	96	217	97
3500K	51	98	41	98	137	98	109	98	296	97	247	98
4000K	46	97	53	98	122	97	138	98	275	96	304	97

Dimensions



Profile (Standard)

Wiring Detail



1" increments from 1"-191"

Part Number Builder

Product	Mounting	Rated	CCT	Output	Lens	Type	Connector/ Wire in	Connector/ Wire out	End Caps (No feed)	Length (in)	
ANBD-SW											
Voltage: 24 VDC Wattage: see table ENCAPSULATED PRODUCTS ARE NOT FIELD CUTTABLE											
	WSC PPS-2 PPS-96 PPS-FT PPS-LP-2 PPS-LP-96 PPS-LP-FT	DRY (IP20) WET (IP67)	24 - 2400K 27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K	SO (1.0W) HO (2.0W) VHO (4.0W)	ENC/CL ENC/TL	Single (Closed exit) Pass through	S1A S1B P1A P1B	BW BRL CON6 CON24 BW BRL CON6 CON24	N/A BW BRL CON6 CON24	CL WH N/A	

- BW comes in standard 24" - request custom length (Max 120") by writing it in inches next to "BW" in the order code box (ex. BW48)
- Connector/Wire In or Out not needed to specify product. Standard configuration is type S1, Connector/Wire In: BW & Connector/Wire Out: N/A with white endcaps (WH)

Flexibility



- Field modifications are not covered under Q-Tran warranty
- 5 year warranty
- Up/Down, Side Bend
- Data subject to change, all data has +/- 5% tolerance
- PPS-FT and PPS-LP-FT is to be cut at Q-Tran to requested length


ANYBEND-SW

Q-CAP Flexible Fixtures - MICRO 5 SERIES



Mounting


NOTE: 2 white snug clips provided per first 12", 1 for each additional 12". Other mounting styles incur additional charge, see price guide for details.

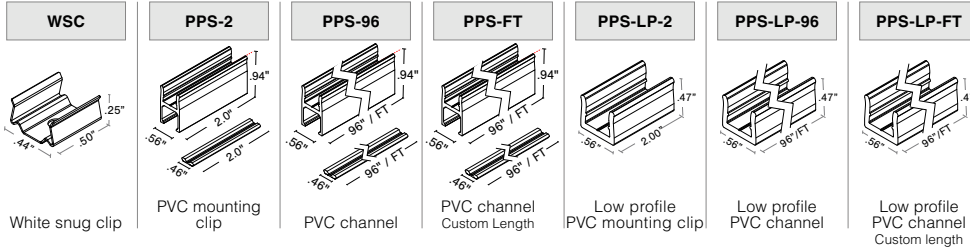


Ambient Temperature Limits

ANYBEND		Minimum (°F)	Maximum (°F)
4W	Millwork	-4	77
	Surface Mount	-4	95
2W	Millwork	-4	113
	Surface Mount	-4	122
1W	Millwork	-4	122
	Surface Mount	-4	122


End Caps (No Feed)



End Caps (With Feed)




Bend Radius




Type

NOTE: Use appropriate Type options to account for power feed locations and desired light throw direction


SINGLE (Input only)

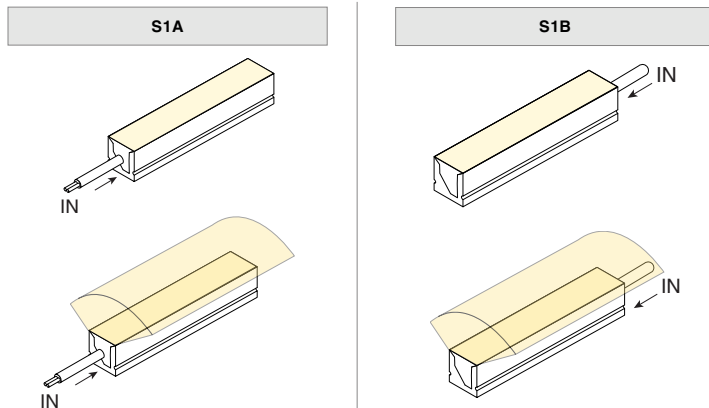


PASS THROUGH (Input/Output)

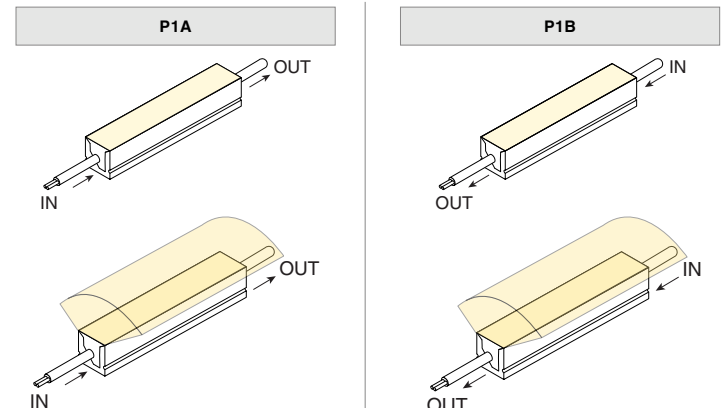

Connector/Wire – In/Out

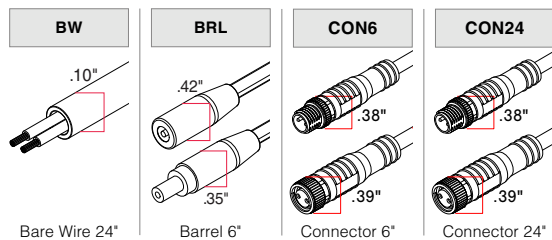

Lens with LED visibility



Compatible Power Supplies

See website for additional power supply options

