

FLEX-DOME


FLEX Light: Static Color



The FLEX series is ideal for spaces where the light will be in direct view. As the name implies, these LED lights are flexible and can be easily molded into different curvatures. The housing and the lens allow for a perfect monochromatic light source with no hot spots. All of Q-Tran's FLEX series fixtures are made with high-quality SMD LED chips, are UV and flame resistant and are extremely energy-efficient.

The FLEX Dome Static Color is available in red, green, blue and amber. The amber color is turtle-friendly for an eco-friendly option when designing a beach-front property.

Color Temperature (CCT)





Red Green Blue Amber

Housing Color



White

Dimensions

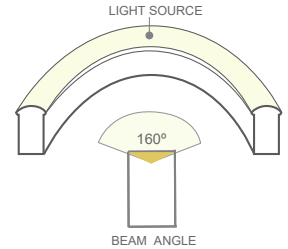

Side bend
3.54" bending radius

Part Number Builder

Product	Series	CCT	Watts/ft	Connector In	Connector In Orientation	Connector In Wire Length	Connector Out	Connector Out Orientation	Connector Out Wire Length	Illuminated Length (in)
FLD-SC	P									
FLD-SC FLEX Dome Static Color Voltage: 24 VDC	P - PVC	RD - Red AB - Amber GR - Green BL - Blue	1.0 Up to 19 lm/ft in red 1.4 Up to 30 lm/ft in green	IM Injected-Molded DIM Dual Injected-Molded SN Snap SW Swivel	FC BC SCL SCR MT* JC* SM FC BC SCL SCR EC MT JC	1' 3' 10'	IM Injected-Molded DIM Dual Injected-Molded SN Snap SW Swivel	FC BC SCL SCR EC MT JC FC EC MT JC	1' 3' 10' N/A	Red & Amber: 4.92" increments Green & Blue: 3.28" increments Nominal max length: Red & Amber: 75" Green & Blue: 52"

- Product length = illuminated length + connector length
- For factory assembled connector information, see page 2
- For DIY connector information, see page 2
- For compatible power supplies, see page 2
- For extrusion options, see page 3 (sold separately)
- *Used in conjunction with Connector/Orientation Out

- 1 year warranty on DIY connectors
- 2 year warranty on PVC
- Impact rating of IK08
- IP67 rated when ordered with IP67 connectors
- Ambient temperature: -4°F to +113°F
- UV & Flame resistant construction
- No diode imaging
- PVC construction




FLEX-DOME

FLEX Light: Static Color




Injected Molded Connectors - IP67 & IP68

INJECTED-MOLDED CONNECTOR - IP67 | PVC

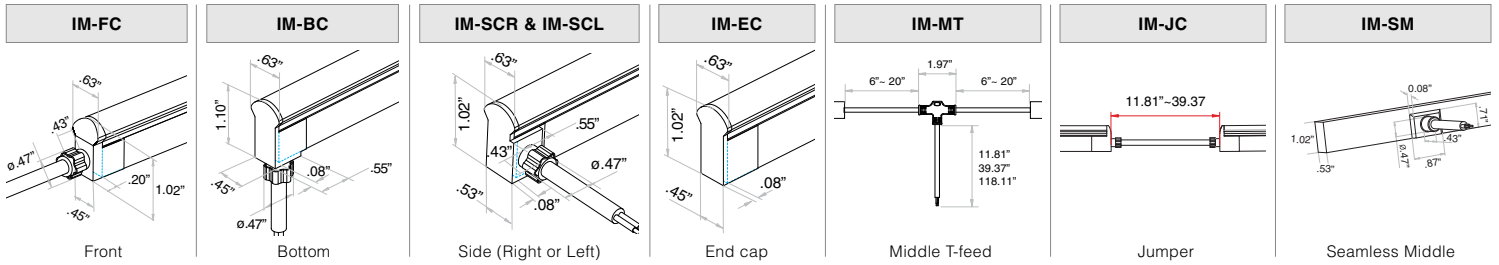


DUAL INJECTED-MOLDED CONNECTOR - IP68 | PVC

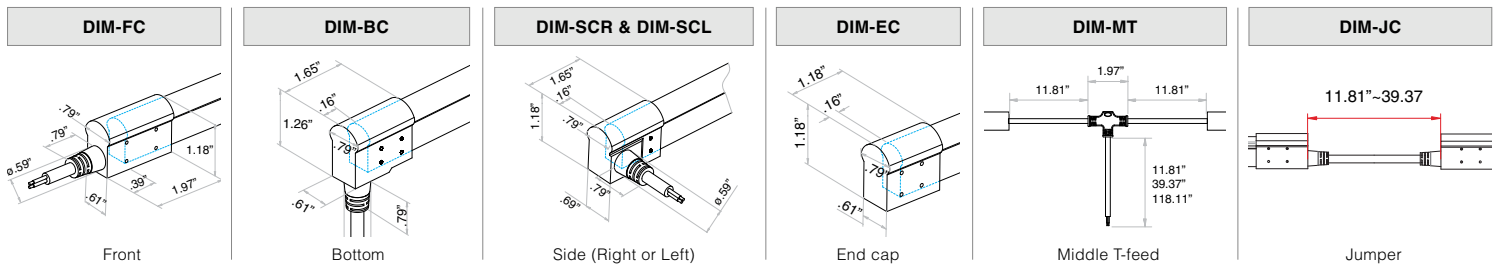


DIY Connectors - IP20 & IP67

NOTE: When specifying non-injected molded connectors, connectors will be sent separately from fixture to be applied in the field.


SWIVEL CONNECTOR - IP20 | PVC

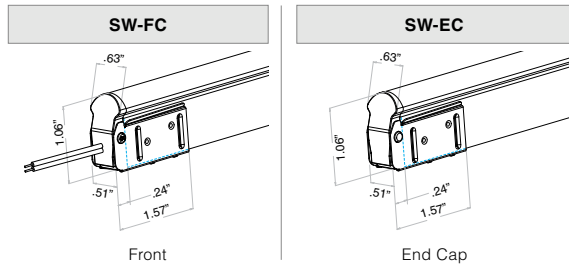

SNAP CONNECTOR - IP67 | PVC

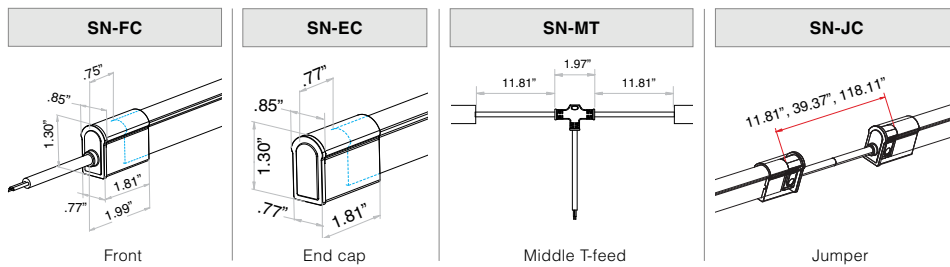

Compatible Power Supplies See website for additional power supply options

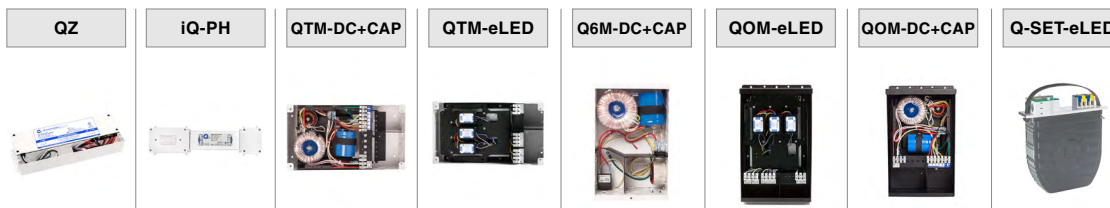

FLEX-DOME




FLEX Light: Static Color





Compatible Extrusions and Clips

NOTE: All extrusions are field cuttable.
1.5" length acts as a clip when used.



FLD-NONL: Non self-locking aluminum profile
Finish: Satin
Available lengths: 1.5", 19.75", 39.5", 79"





FLD-NONL-FL: Non self-locking flanged aluminum profile
Finish: Satin
Available lengths: 1.5", 19.75", 39.5", 79"



FLD-SELF-PL: Self-locking plastic profile
Finish: Clear
Available lengths: 1.5", 19.75", 39.5", 79"

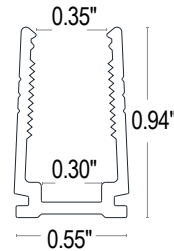

FLD-SELF-SP: Self-locking spring clip aluminum profile
Finish: Satin
Available lengths: 1.5", 19.75", 39.5", 79"



FLD-SELF-BD: Self-locking bendable stainless steel profile
Finish: Satin
Available lengths: 4", 11.75", 19.75", 35.5"

