

FLEX-DOME

FLEX Light: Static White




The FLEX series is ideal for spaces where the light will be in direct view. As the name implies, these LED lights are flexible and can be easily molded into different curvatures. The housing and the lens allow for a perfect monochromatic light source with no hot spots. All of Q-Tran's FLEX series fixtures are made with high-quality SMD LED chips, are UV and flame resistant and are extremely energy-efficient.

The FLEX Dome Static White is available in a variety of different color temperatures ranging from 2200K to 5700K and can be specified with PVC construction.



Color Temperature (CCT)



Housing Color



Dimensions



Part Number Builder

Product	Series	CCT	CRI	Watts/ft	Connector In	Connector In Orientation	Connector In Wire Length	Connector Out	Connector Out Orientation	Connector Out Wire Length	Illuminated Length (in)
FLD-SW	P		90	1.4							
FLD-SW	P	22 - 2200K 27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K 57 - 5700K	90	1.4 Up to 36 lm/ft at 3000K	IM Injected-Molded	FC BC SCL SCR MT* JC* SM	1' 3' 10'	IM Injected-Molded	FC BC SCL SCR EC MT JC SM	1' 3' 10' N/A	3.28" increments Nominal max length: 52'
					DIM Dual Injected-Molded	FC BC SCL SCR MT* JC*		DIM Dual Injected-Molded	FC BC SCL SCR EC MT JC		
					SN Snap	FC		SN Snap	FC EC MT JC		
					SW Swivel			SW Swivel	FC EC		

- Product length = illuminated length + connector length
- For factory assembled connector information, see page 2
- For DIY connector information, see page 2
- For compatible power supplies, see page 2
- For extrusion options, see page 3 (sold separately)
- *Used in conjunction with Connector/Orientation Out


- 1 year warranty on DIY connectors
- 2 year warranty on PVC
- Impact rating of IK08
- IP67 rated when ordered with IP67 connectors

- Ambient temperature: -4°F to +113°F
- UV & Flame resistant construction
- No diode imaging
- PVC construction




Injected Molded Connectors - IP67 & IP68

INJECTED-MOLDED CONNECTOR - IP67 | PVC

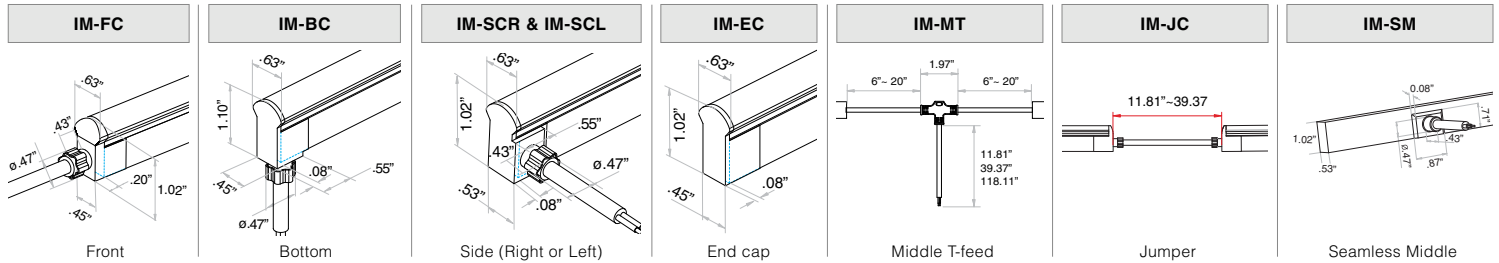


DUAL INJECTED-MOLDED CONNECTOR - IP68 | PVC

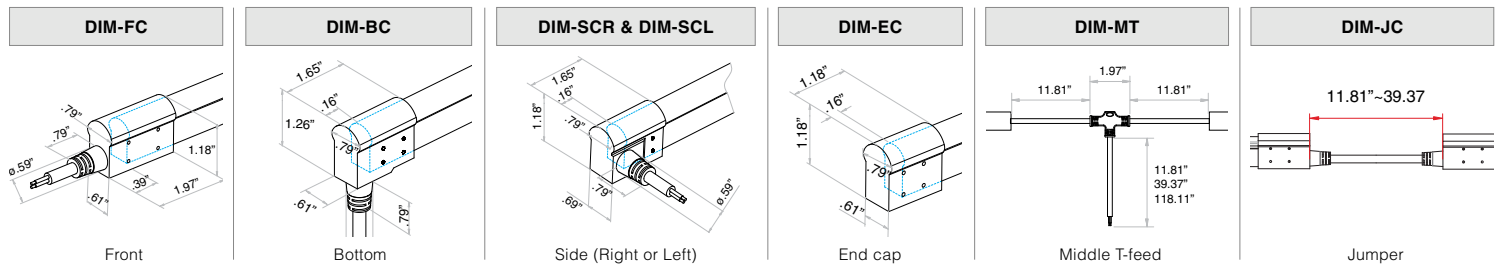


DIY Connectors - IP20 & IP67

NOTE: When specifying non-injected molded connectors, connectors will be sent separately from fixture to be applied in the field.


SWIVEL CONNECTOR - IP20 | PVC

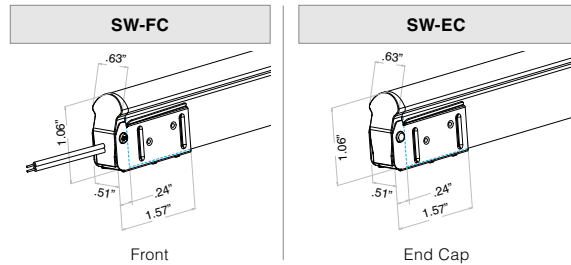

SNAP CONNECTOR - IP67 | PVC

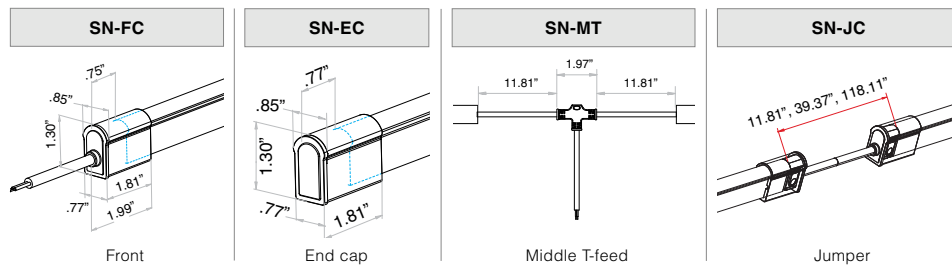

Compatible Power Supplies See website for additional power supply options

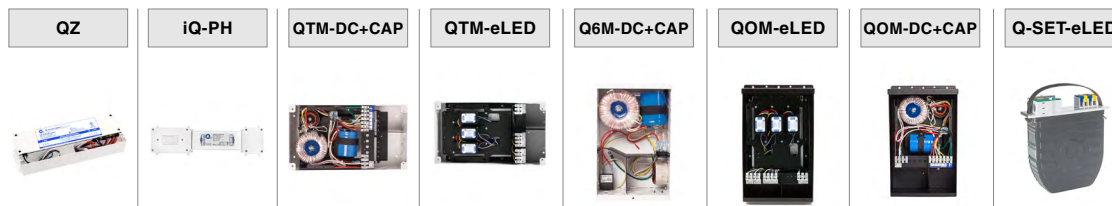

FLEX-DOME

FLEX Light: Static White



Compatible Extrusions and Clips




NOTE: All extrusions are field cuttable.

1.5" length acts as a clip when used.

FLD-NONL: Non self-locking aluminum profile

Finish: Satin



Available lengths: 1.5", 19.75", 39.5", 79"



FLD-NONL-FL: Non self-locking flanged aluminum profile

Finish: Satin




Available lengths: 1.5", 19.75", 39.5", 79"



FLD-SELF-PL: Self-locking plastic profile

Finish: Clear



Available lengths: 1.5", 19.75", 39.5", 79"



FLD-SELF-SP: Self-locking spring clip aluminum profile

Finish: Satin

Available lengths: 1.5", 19.75", 39.5", 79"



FLD-SELF-BD: Self-locking bendable stainless steel profile

Finish: Satin

Available lengths: 4", 11.75", 19.75", 35.5"

