KURV-BK-DW-HE Q-CAP Flexible Fixtures







R₂HS


Designed to be discreet. Bring dark surfaces to light with a flexible light source that blends in.

- The fully encapsulated black exterior provides optimal concealability for façade, ceiling, and outdoor applications
- Features a disguised appearance with the same superior results as the standard KURV A 10" side bend radius allows for even greater continuous lines of light perfect for illuminating dark contours and curves
- Features a parabolic curve, which distributes asymmetrical light with an internal reflector
 - Perfect for interior and exterior applications Compatible with precision-engineered black plastic clips and mounting channels
- Encapsulation is available in a clear or translucent polyurethane
- Optional seamless connections eliminate light gap

Output [Calculated L70 = 40000 hours]

Tested for KURV-BK-DW-HE-PL-DRY


сст	SO Standard Output 1.5 W/ft Per Channel				HO High Output 2.5 W/ft Per Channel			
	ENC/CL		ENC/TL		ENC/CL		ENC/TL	
	LM	CRI	LM	CRI	LM	CRI	LM	CRI
<u></u> 2400К	108	93	91	92	171	94	142	92
<u> </u>	112	98	90	97	171	98	142	98
9000к	123	96	92	96	182	96	146	96
4000K	111	97	113	97	176	97	172	97







Part Number Builder

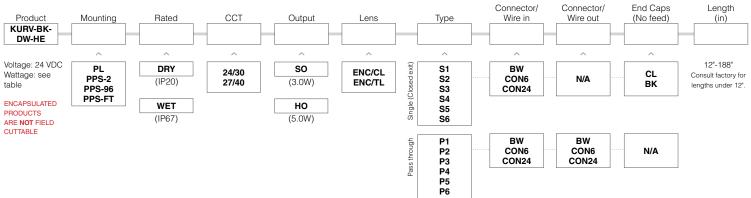

- BW comes in standard 24"- request custom length (Max 120") by writing it in inches next to "BW" in the order code box (ex. BW48)

- Connector/Wire In or Out not needed to specify product. Standard configuration is type S1, Connector/Wire In: BW & Connector/Wire Out: N/A with black end caps (BK)
- PPS mounting clip recommended for seamless applications

Flexibility



- 5 year warranty
- Field modifications are not covered under Q-Tran warranty
- Side Bend
- IK10 impact rated

- Data subject to change, all data has +/- 5% tolerance
- **PPS-FT** is to be cut at Q-Tran to requested length
- Ambient or mounting surface must not be lower than -4°F or higher than: SO - 125°F; HO - 115°F

KURV-BK-DW-HE Q-CAP Flexible Fixtures



Mounting NOTE: 2 plastic clips provided per first 12", 1 for each additional 12". Other mounting styles incur additional charge, see price guide for details.

