


KURV-BK-RGBW

Q-CAP Flexible Fixtures

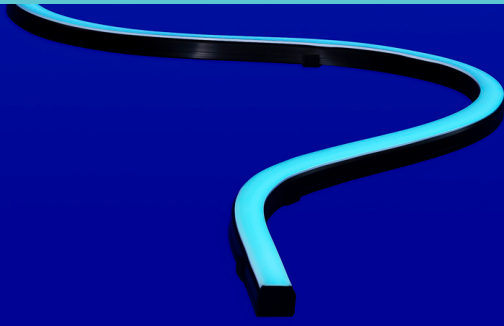

Designed to be discreet. Bring dark surfaces to light with a flexible light source that blends in.

- The fully encapsulated black exterior provides optimal concealability for façade, ceiling, and outdoor applications
- Features a disguised appearance with the same superior results as the standard KURV
- A 10" side bend radius allows for even greater continuous lines of light perfect for illuminating dark contours and curves
- Features a parabolic curve, which distributes asymmetrical light with an internal reflector
- Perfect for interior and exterior applications
- Compatible with precision-engineered black plastic clips and mounting channels
- Encapsulation is available in a clear or translucent polyurethane

Output [Calculated L70 = 40000 hours]


Tested for KURV-BK-RGBW-PL-DRY

SO Standard Output

CCT	LM/FT	Wavelength	Circuit Wattage
● Red	32	633	1.3
● Green	95	513	1.5
● Blue	28	464	1.5

CCT	LM/FT	CRI Ra	CRI R9	TM30 Rf	TM30 Rg	Circuit Wattage
● 2700K	85	92	67	87	105	1.7
● 3000K	93	93	69	89	102	1.7

Dimensions



Wiring Detail



Available in 4" increments from 12"-188"

Part Number Builder


Product	Mounting	Rated	CCT	Output	Lens	Type	Connector/ Wire in	Connector/ Wire out	End Caps (No feed)	Length (in)
KURV-BK-RGBW				SO						
Voltage: 24 VDC Wattage: 1.5W/ft (per channel) 6.0W/ft (total load)	PL PPS-2 PPS-96 PPS-FT	DRY (IP20) WET (IP67)	RGBW - 27 RGBW - 30	SO	ENC/CL ENC/TL	S1 S2 S3 S4 P1 P2 P3 P4	BW CON6 CON24	N/A BW CON6 CON24	CL BK N/A	12"-188" Consult factory for lengths under 12".

ENCAPSULATED PRODUCTS ARE NOT FIELD CUTTABLE

Single (Closed exit)
Pass through

- **BW** comes in standard 24"- request custom length (Max 120") by writing it in inches next to "BW" in the order code box (ex. BW48)
- **Connector/Wire In or Out** not needed to specify product. Standard configuration is type S1, Connector/Wire In: BW & Connector/Wire Out: N/A with black end caps (BK)

Flexibility

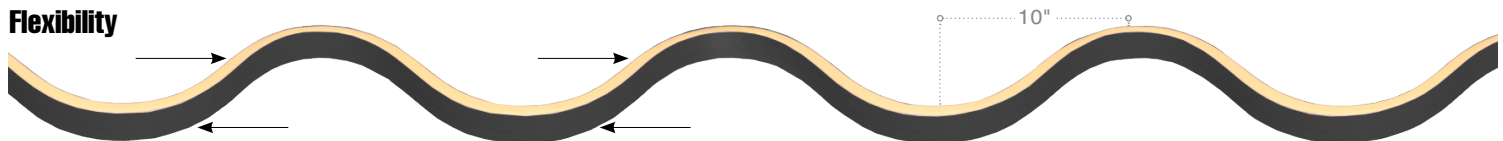


- 5 year warranty
- Field modifications are not covered under Q-Tran warranty
- Side Bend
- IK10 impact rated
- Data subject to change, all data has +/- 5% tolerance
- **PPS-FT** is to be cut at Q-Tran to requested length

KURV-BK-RGBW

Q-CAP Flexible Fixtures




Mounting NOTE: 2 plastic clips provided per first 12", 1 for each additional 12". Other mounting styles incur additional charge, see price guide for details.

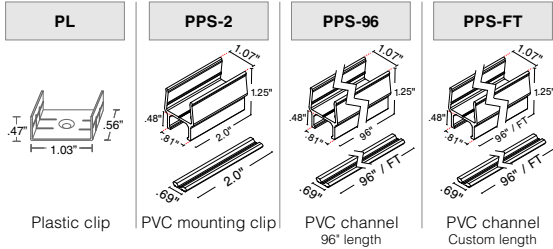


Type


SINGLE (Input only)

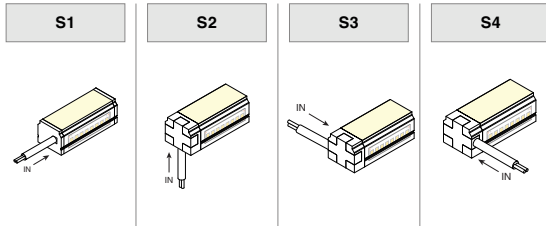


PASS THROUGH (Input/Output)

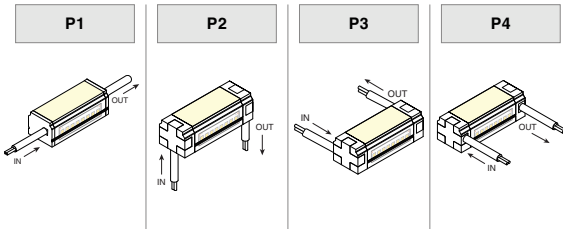


Bend Radius




End Caps (No Feed)




End Caps (With Feed)



Connector/Wire – In/Out

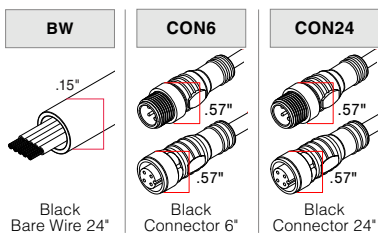

Lens with LED visibility



Compatible Power Supplies

See website for additional power supply options

