


KURV-BK-RGBW-HE

Q-CAP Flexible Fixtures

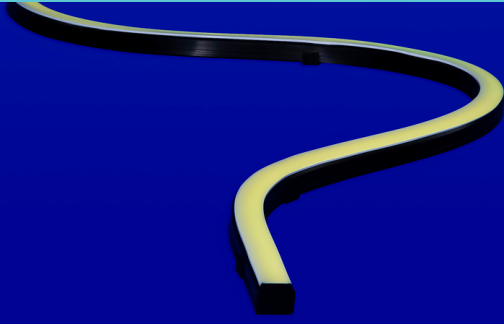

Designed to be discreet. Bring dark surfaces to light with a flexible light source that blends in.

- The fully encapsulated black exterior provides optimal concealability for façade, ceiling, and outdoor applications
- Features a disguised appearance with the same superior results as the standard KURV
- A 10" side bend radius allows for even greater continuous lines of light perfect for illuminating dark contours and curves
- Features a parabolic curve, which distributes asymmetrical light with an internal reflector
- Perfect for interior and exterior applications
- Compatible with precision-engineered black plastic clips and mounting channels
- Encapsulation is available in a clear or translucent polyurethane

Output [Calculated L70 = 40000 hours]

Tested for KURV-BK-RGBW-HE-PL-DRY


SO Standard Output [3W/ft]

CCT	ENC/CL		ENC/TL		Circuit Wattage
	Lumen/ft	Wavelength	Lumen/ft	Wavelength	
Red	31	630	24	629	0.77
Green	105	519	76	519	1.2
Blue	25	466	19	464	1.1


SO Standard Output [1W/ft]

CCT	ENC/CL		ENC/TL		Circuit Wattage
	Lumen/ft	CRI	Lumen/ft	CRI	
2700K	56	98	46	97	0.86
3000K	60	97	45	96	0.86
3500K	66	96	53	97	0.86
4000K	64	95	56	96	0.86

Dimensions




Wiring Detail




Available in 2" increments from 12"-188"

Part Number Builder

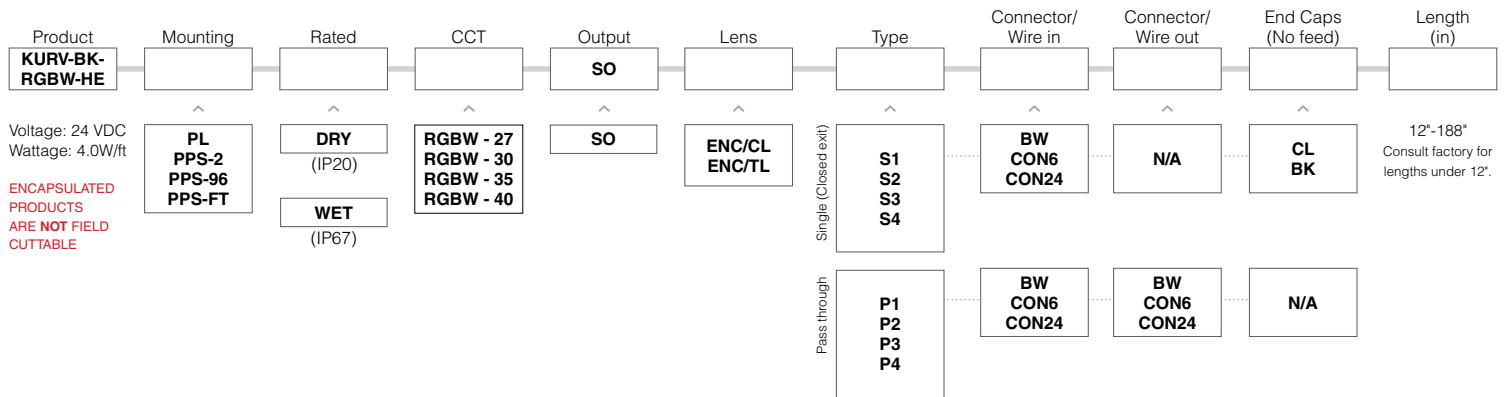

- **BW** comes in standard 24"- request custom length (Max 120") by writing it in inches next to "BW" in the order code box (ex. BW48)
- **Connector/Wire In or Out** not needed to specify product. Standard configuration is type S1, Connector/Wire In: BW & Connector/Wire Out: N/A with black end caps (BK)

Flexibility

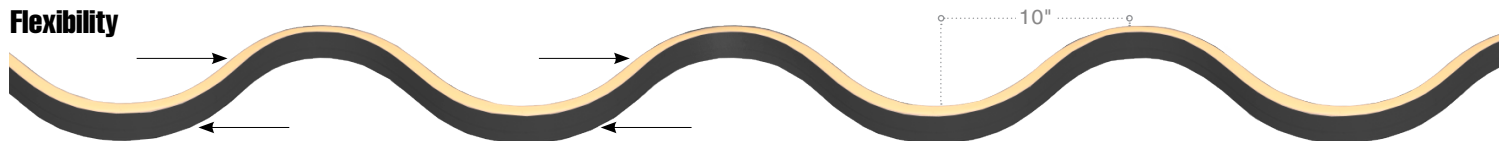

- 5 year warranty
- Field modifications are not covered under Q-Tran warranty
- Side Bend
- IK10 impact rated
- Data subject to change, all data has +/- 5% tolerance
- **PPS-FT** is to be cut at Q-Tran to requested length


KURV-BK-RGBW-HE

Q-CAP Flexible Fixtures




Mounting

NOTE: 2 plastic clips provided per first 12", 1 for each additional 12". Other mounting styles incur additional charge, see price guide for details.

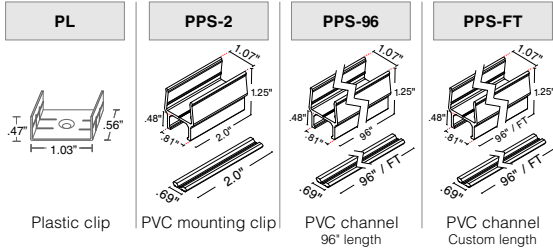


Type


SINGLE (Input only)

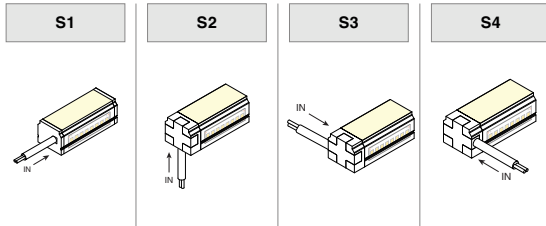


PASS THROUGH (Input/Output)

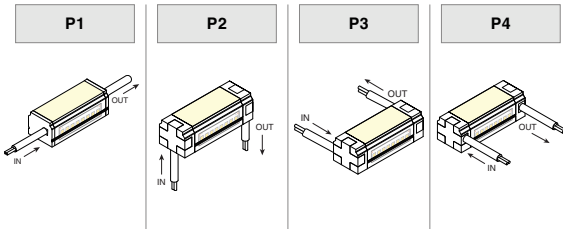


Bend Radius




End Caps (No Feed)




End Caps (With Feed)



Connector/Wire – In/Out

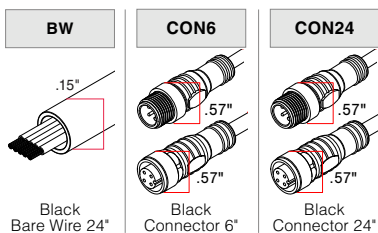

Lens with LED visibility



Compatible Power Supplies

See website for additional power supply options

