


KURV-BK-SC

Q-CAP Flexible Fixtures

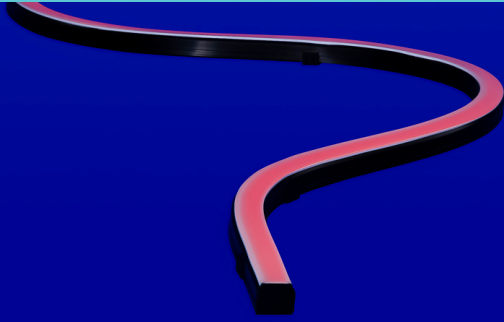

Designed to be discreet. Bring dark surfaces to light with a flexible light source that blends in.


- The fully encapsulated black exterior provides optimal concealability for façade, ceiling, and outdoor applications
- Features a disguised appearance with the same superior results as the standard KURV
- A 10" side bend radius allows for even greater continuous lines of light perfect for illuminating dark contours and curves
- Features a parabolic curve, which distributes asymmetrical light with an internal reflector
- Perfect for interior and exterior applications
- Compatible with different mounting hardware options to ensure the product fits any design need

Output [Calculated L70 = 40000 hours]


Tested for KURV-BK-SC-PL-DRY

	CCT	VHO Very High Output			
		ENC/CL		ENC/TL	
		LM	CRI	LM	CRI
Red		90	632	85	633
Green		419	520	355	519
Blue		95	466	86	468
Amber		85	595	72	594

Dimensions

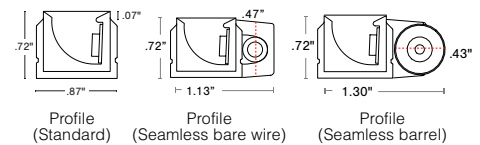

Wiring Detail



Available in 2" increments from 12"-188"

Part Number Builder

Product	Mounting	Rated	CCT	Output	Lens	Type	Connector/ Wire in	Connector/ Wire out	End Caps (No feed)	Length (in)
KURV-BK-SC				VHO						
Voltage: 24 VDC Wattage: 5.0W/ft	PL PPS-2 PPS-96 PPS-FT	DRY (IP20) WET (IP67)	G B R A - Green - Blue - Red - Amber	VHO (5.0W)	ENC/CL ENC/TL	Single (Closed exit) S1 S2 S3 S4 S5 S6 Pass through P1 P2 P3 P4 P5 P6	BW BRL CON6 CON24	N/A	CL BK	12"-188" Consult factory for lengths under 12".
							BW BRL CON6 CON24	BW BRL CON6 CON24	N/A	


- **BW** comes in standard 24"- request custom length (Max 120") by writing it in inches next to "BW" in the order code box (ex. BW48)
- **Connector/Wire In or Out** not needed to specify product. Standard configuration is type S1, Connector/Wire In: BW & Connector/Wire Out: N/A with black end caps (BK)
- **PPS** mounting clip recommended for seamless applications

Flexibility




- 5 year warranty
- Field modifications are not covered under Q-Tran warranty
- Side Bend
- IK10 impact rated
- FWC - Florida Fish and Wildlife Conservation Commission rated (Red and Amber)
- Data subject to change, all data has +/- 5% tolerance
- **PPS-FT** is to be cut at Q-Tran to requested length

Mounting NOTE: 2 plastic clips provided per first 12", 1 for each additional 12". Other mounting styles incur additional charge, see price guide for details.

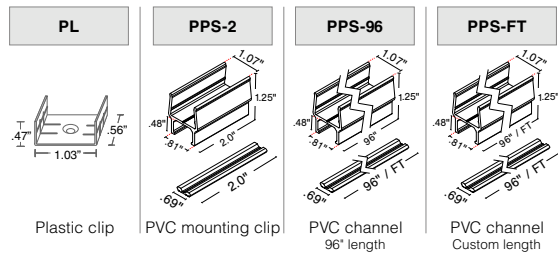


Type


SINGLE (Input only)

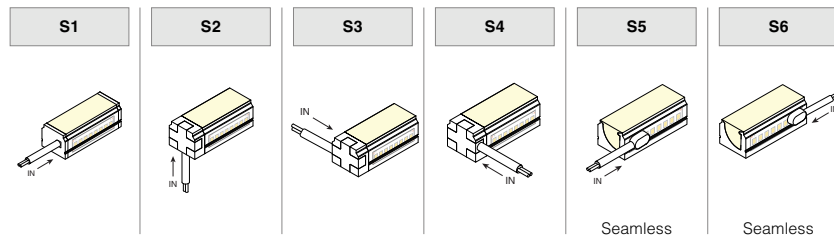


PASS THROUGH (Input/Output)

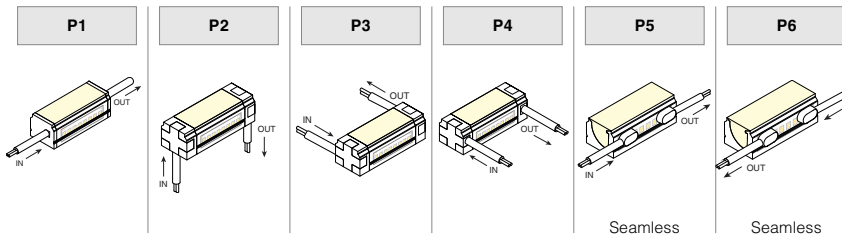


End Caps (No Feed)



End Caps (With Feed)



Bend Radius




Seamless


Shown with bare wire, connectors vary



Connector/Wire – In/Out

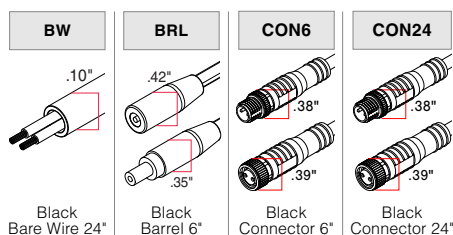

Lens with LED visibility



Compatible Power Supplies

See website for additional power supply options

