


LUME-01-RGB Q-CAP Flexible Fixtures

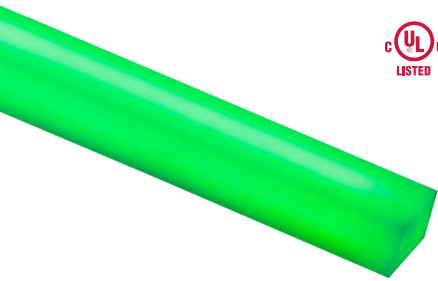

With eye-catching brilliance, a plethora of color options, and ties to a retro aesthetic, LUME makes any space feel simultaneously modern and nostalgic.


- Fully encapsulated flexible fixture that is illuminated on 3 sides
- Perfect for interior and exterior applications
- Offered in Standard Output (6.0 W/ft)
- Unique up/down bend with a 6" bending radius provides creative freedom to create eye-catching lines of light
- 150° beam angle creates 3-sided illumination with ties to a retro aesthetic
- Compatible with different mounting hardware options to ensure product fits any design need
- Utilize translucent endcaps for continuous runs with no light loss

Output [Calculated L70 = 40000 hours]

Tested for LUME-01-RGB-WSC-DRY


CCT	LM/FT	SO Standard Output	
		ENC/TL	Circuit Wattage
		Wavelength	
Red	43	632	2.4
Green	109	522	1.9
Blue	29	469	1.7
All	169	***	6.0

Dimensions



Profile
(Standard)

Wiring Detail



Part Number Builder

Product	Mounting	Rated	CCT	Output	Lens	Type	Connector/ Wire in	Connector/ Wire out	End Caps (No feed)	Length (in)
LUME-01- RGB			RGB	SO	ENC/TL					
Voltage: 24 VDC Wattage: 2.0W/ft (per channel) 6.0W/ft (total load)	WSC MC PPS-LP-CL-2 PPS-LP-CL-96 PPS-LP-CL-FT	DRY (IP20) WET (IP67)	RGB	SO	ENC/TL	Single (Closed exit) S1 Pass through P1	BW CON6 CON24 BW CON6 CON24	N/A BW CON6 CON24	TL N/A	Max run: 191"

ENCAPSULATED PRODUCTS ARE NOT FIELD CUTTABLE

1 BW comes in standard 24"- request custom length (Max 120") by writing it in inches next to "BW" in the order code box (ex. BW48)

2 Connector/Wire In or Out not needed to specify product. Standard configuration is type S1, Connector/Wire In: BW & Connector/Wire Out: N/A with white endcap (WH)

Flexibility




- Field modifications void Q-Tran warranty
- Up/Down Bend
- Data subject to change, all data has +/- 5% tolerance
- PPS-LP-CL-FT is to be cut at Q-Tran to requested length

LUME-01-RGB

Q-CAP Flexible Fixtures




Mounting NOTE: 2 white snug clips provided per first 12", 1 for each additional 12". Other mounting styles incur additional charge, see price guide for details.

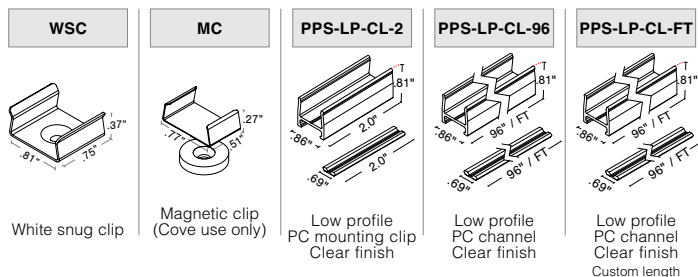

Type


SINGLE (Input only)

S1




PASS THROUGH (Input/Output)

P1



End Caps

TL



Translucent endcaps
.0" added at end

.00" dim spot


Bend Radius

Light source




Up/Down bend
6" bending
radius

Beam Angle




Connector/Wire – In/Out

BW




Bare Wire 24"

CON6



Connector 6"

CON24



Connector 24"

Lens with LED visibility

ENC/TL



Encapsulated
in translucent

Compatible Power Supplies

See website for additional power supply options

QTM-eLED+DMX



QOM-eLED+DMX



QTM-DRIVE



QOM-DRIVE

