

FLEX-MEZA

FLEX Light: RGBW





The FLEX series is ideal for architectural spaces where the light will be in direct view. As the name implies, these LED lights are flexible and can be easily molded into different curvatures. The housing and the lens allow for a perfect monochromatic light source with no hot spots. All of Q-Tran's FLEX series lights are made with high-quality SMD LED chips, are UV and flame resistant and are extremely energy-efficient.

The FLEX Meza RGBW is color changing and can be controlled by a Q-Tran supplied DMX controller or a third party controller may be used.


Color Temperature (CCT)



Dimensions



Housing Color



Part Number Builder

Product	Series	CCT	CRI	Watts/ft	Connector In	Connector In Orientation	Connector In Wire Length	Connector Out	Connector Out Orientation	Connector Out Wire Length	Illuminated Length (in)
FMZ-RGBW			80	4.5							
FMZ-RGBW FLEX Meza RGBW Voltage: 24 VDC	P - PVC S - Silicone	RGBW-27 RGBW-40	80	4.5 Up to 37 lm/ft at 3000K	IM Injected-Molded DIM Dual Injected-Molded PVC only	FC BC SCL SCR MT* JC*	1' 3' 10'	IM Injected-Molded DIM Dual Injected-Molded PVC only	FC BC SCL SCR EC MT JC	1' 3' 10' N/A	3.94" increments Nominal max length: 16'


- Product length = illuminated length + connector length
- For factory assembled connector information, see page 2
- For compatible power supplies, see page 2
- For extrusion options, see page 3 (sold separately)
- *Used in conjunction with Connector/Orientation Out

- 2 year warranty on PVC
- 5 year warranty on silicone
- Impact rating of IK08
- IP67 rated when ordered with IP67 connectors
- Ambient temperature: -4°F to +113°F
- UV & Flame resistant construction
- No diode imaging
- PVC - standard
- Silicone - best for outdoor applications




Injected Molded Connectors - IP67 & IP68


INJECTED-MOLDED CONNECTOR - IP67 | PVC

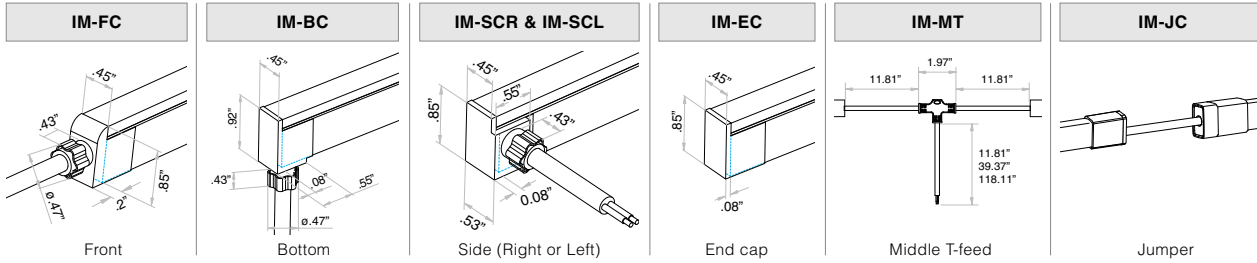

DUAL INJECTED-MOLDED CONNECTOR - IP68 | PVC

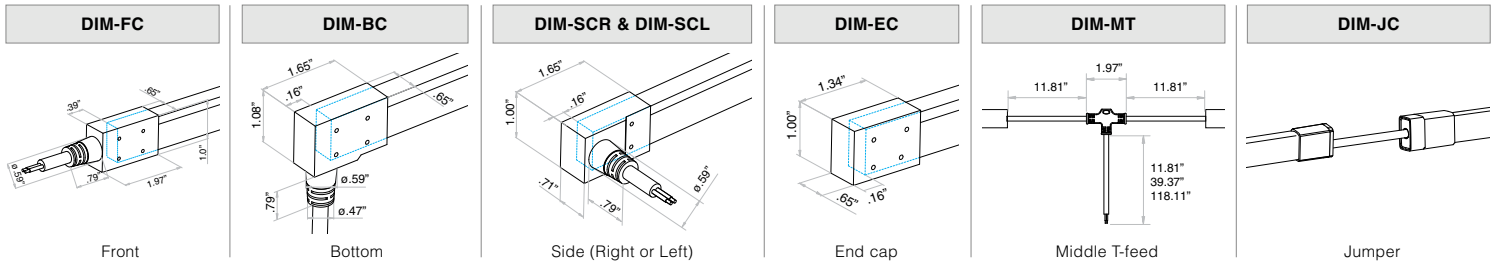

INJECTED-MOLDED CONNECTOR - IP68 | SILICONE

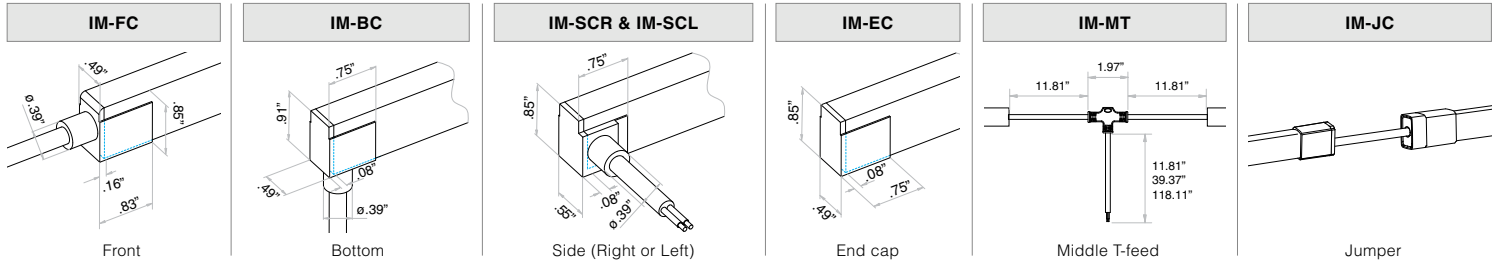




Compatible Power Supplies See website for additional power supply options





Compatible Extrusions and Clips

NOTE: All extrusions are field cuttable and can be used with either silicone or PVC housings.
1.5" length acts as a clip when used.



FMZ-NONL: Non self-locking aluminum profile
Finish: Satin
Available lengths: 1.5", 19.75", 39.5", 79"





FMZ-NONL-FL: Non self-locking flanged aluminum profile
Finish: Satin
Available lengths: 1.5", 19.75", 39.5", 79"



FMZ-SELF-SR: Self-locking serrated aluminum profile
Finish: Satin
Available lengths: 1.5", 19.75", 39.5", 79"



FMZ-SELF-FL: Self-locking flanged serrated aluminum profile
Finish: Satin
Available lengths: 1.5", 19.75", 39.5", 79"



FMZ-SELF-BD: Self-locking bendable serrated aluminum profile
Finish: Satin
Available lengths: 19.75", 39.5"

