



The FLEX series is ideal for spaces where the light will be in direct view. As the name implies, these LED lights are flexible and can be easily molded into different curvatures. The housing and the lens allow for a perfect monochromatic light source with no hot spots. All of Q-Tran's FLEX series fixtures are made with high-quality SMD LED chips, are UV and flame resistant and are extremely energy-efficient.

The FLEX Qube Static Color is available in red, green, blue and amber. The amber color is turtle-friendly for an eco-friendly option when designing a beach-front property.

Technical Information

CCT	Lumen/ft	Wavelength
Red	35	630
Green	115	523
Blue	29	467
Amber	34	593


Housing Color



Dimensions

3.94" bending radius


VB: Vertical Bending



Light source



HB: Horizontal Bending



Light Source



Part Number Builder

Product	Series	CCT	Bend Direction	Watts/ft	Connector In	Connector In Orientation	Connector In Wire Length	Connector Out	Connector Out Orientation	Connector Out Wire Length	Illuminated Length (in)
FLQ-SC				1.4							
FLQ-SC FLEX Qube Static Color Voltage: 24 VDC	P - PVC - Silicone	RD - Red GR - Green BL - Blue AB - Amber	VB Vertical Bend HB Horizontal Bend	1.4 Up to 67 lm/ft in green	IM Injected-Molded	FC BC SCL SCR MT* JC*	1' 3' 10'	IM Injected-Molded	FC BC SCL SCR EC MT JC	1' 3' 10' N/A	3.28" increments Nominal max length: 49'
					DIM Dual Injected-Molded PVC only	FC BC SCL SCR MT* JC*		DIM Dual Injected-Molded PVC only	FC BC SCL SCR EC MT JC		
					SW Swivel	FC		SW Swivel	FC EC		

- Product length = illuminated length + connector length
- For factory assembled connector information, see page 2
- For DIY connector information, see page 2
- For compatible power supplies, see page 2
- For extrusion options, see page 3 (sold separately)
- *Used in conjunction with Connector/Orientation Out


- 1 year warranty on DIY connectors
- 2 year warranty on PVC
- 5 year warranty on silicone
- Impact rating of IK08
- IP67 rated when ordered with IP67 connectors

- Ambient temperature: 32°F to 113°F
- UV & Flame resistant construction
- No diode imaging
- PVC - standard
- Silicone - best for outdoor applications




Injected Molded Connectors - IP65 & IP67


INJECTED-MOLDED CONNECTOR - IP65 | PVC

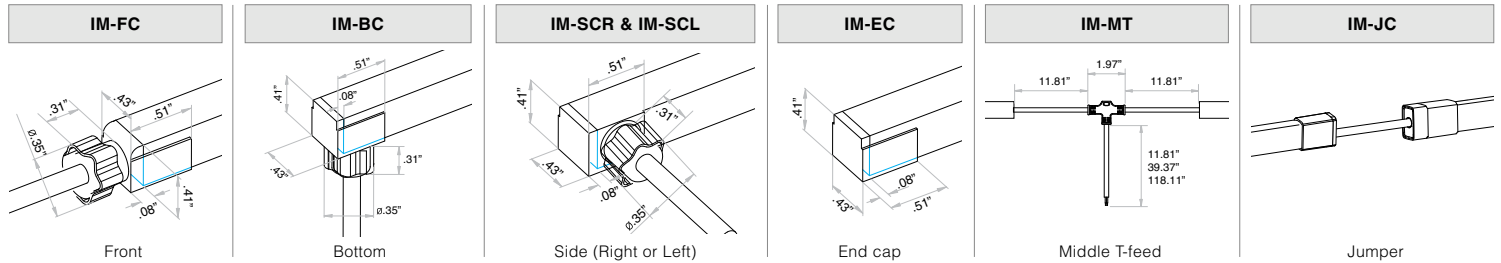

DUAL INJECTED-MOLDED CONNECTOR - IP65 | PVC

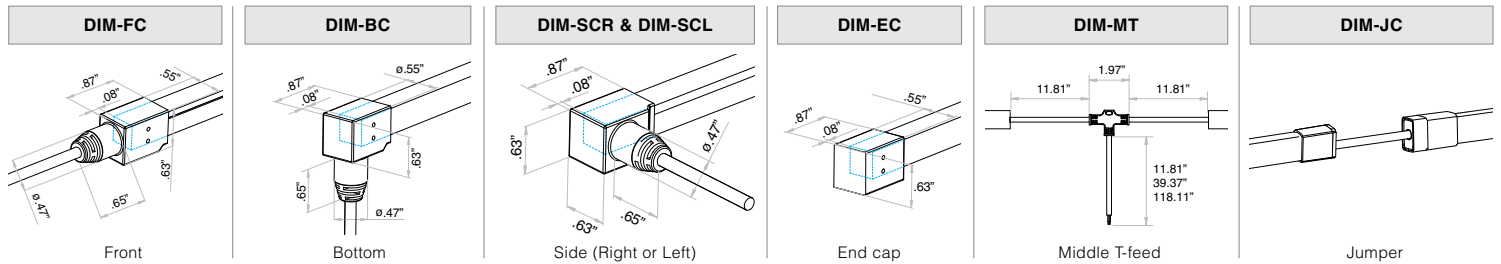


INJECTED-MOLDED CONNECTOR - IP67 | SILICONE

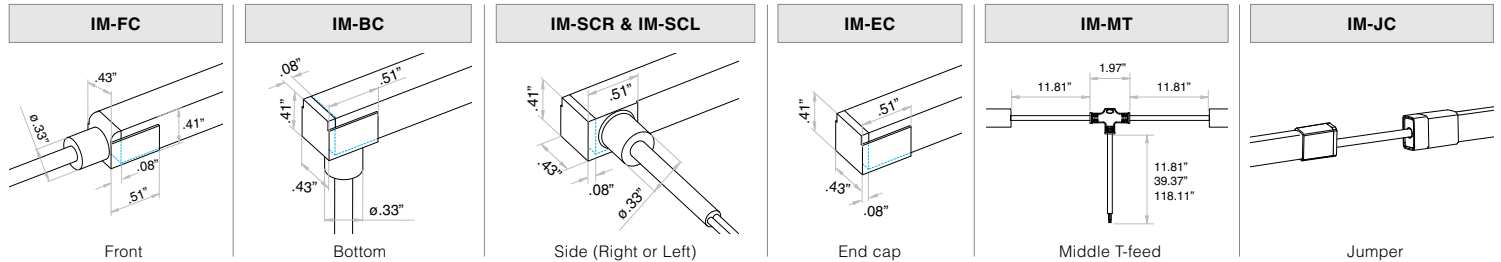

DIY Connectors - IP20

NOTE: When specifying non-injected molded connectors, connectors will be sent separately from fixture to be applied in the field.

SWIVEL CONNECTOR - IP20 | PVC & SILICONE

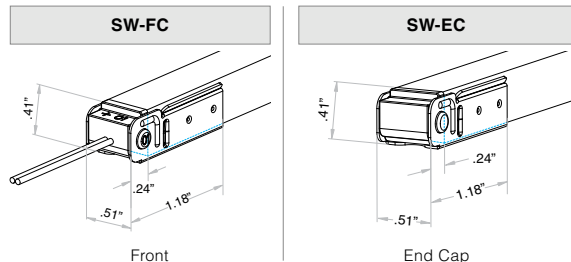

Compatible Power Supplies




See website for additional power supply options






Compatible Extrusions and Clips

NOTE: All extrusions are field cuttable and can be used with either silicone or PVC housings.
1.5" length acts as a clip when used.



FLQ-NONL: Non self-locking aluminum profile
Finish: Satin
Available lengths: 1.5", 19.75", 39.5", 79"





FLQ-NONL-FL: Non self-locking flanged aluminum profile
Finish: Satin
Available lengths: 1.5", 19.75", 39.5", 79"



FLQ-SELF-SR: Self-locking serrated aluminum profile
Finish: Satin
Available lengths: 1.5", 19.75", 39.5", 79"



FLQ-SELF-FL: Self-locking flanged serrated aluminum profile
Finish: Satin
Available lengths: 1.5", 19.75", 39.5", 79"



FLQ-SELF-BD: Self-locking bendable serrated aluminum profile
Finish: Satin
Available lengths: 19.75", 39.5"

