

FLEX-QUBE

FLEX Light: Static White




The FLEX series is ideal for spaces where the light will be in direct view. As the name implies, these LED lights are flexible and can be easily molded into different curvatures. The housing and the lens allow for a perfect monochromatic light source with no hot spots. All of Q-Tran's FLEX series fixtures are made with high-quality SMD LED chips, are UV and flame resistant and are extremely energy-efficient.

The FLEX Qube Static White is available in a variety of different color temperatures ranging from 2200K to 5700K and can be specified with either PVC or Silicone construction.


Technical Information

CCT	Lumen/ft	CRI
2200K	52	98
2700K	63	99
3000K	70	98
3500K	66	98
4000K	72	94
5700K	**	**

Housing Color



Dimensions 3.94" bending radius

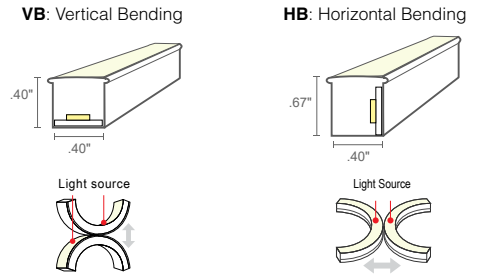

Part Number Builder

Product	Series	CCT	Bend Direction	CRI	Watts/ft	Connector In	Connector In Orientation	Connector In Wire Length	Connector Out	Connector Out Orientation	Connector Out Wire Length	Illuminated Length (in)
FLQ-SW				90	1.4							
FLQ-SW FLEX Qube Static White Voltage: 24 VDC	P - PVC S - Silicone	22 - 2200K 27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K 57 - 5700K	VB Vertical Bend HB Horizontal Bend	90	1.4 Up to 55 lm/ft at 3000K	IM Injected-Molded DIM Dual Injected-Molded PVC only SW Swivel	FC BC SCL SCR MT* JC* FC BC SCL SCR MT* JC* FC	1' 3' 10'	IM Injected-Molded DIM Dual Injected-Molded PVC only SW Swivel	FC BC SCL SCR EC MT JC FC BC SCL SCR EC MT JC FC EC	1' 3' 10' N/A	3.28" increments Nominal max length: 49'


- Product length = illuminated length + connector length
- For factory assembled connector information, see page 2
- For DIY connector information, see page 2
- For compatible power supplies, see page 2
- For extrusion options, see page 3 (sold separately)
- *Used in conjunction with Connector/Orientation Out

- 1 year warranty on DIY connectors
- 2 year warranty on PVC
- 5 year warranty on silicone
- Impact rating of IK08
- IP67 rated when ordered with IP67 connectors
- Ambient temperature: 32°F to 113°F
- UV & Flame resistant construction
- No diode imaging
- PVC - standard
- Silicone - best for outdoor applications




Injected Molded Connectors - IP65 & IP67


INJECTED-MOLDED CONNECTOR - IP65 | PVC

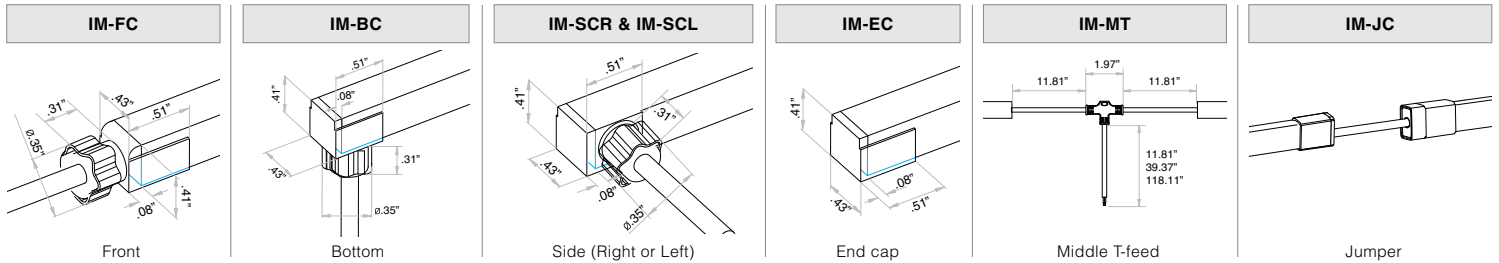

DUAL INJECTED-MOLDED CONNECTOR - IP65 | PVC

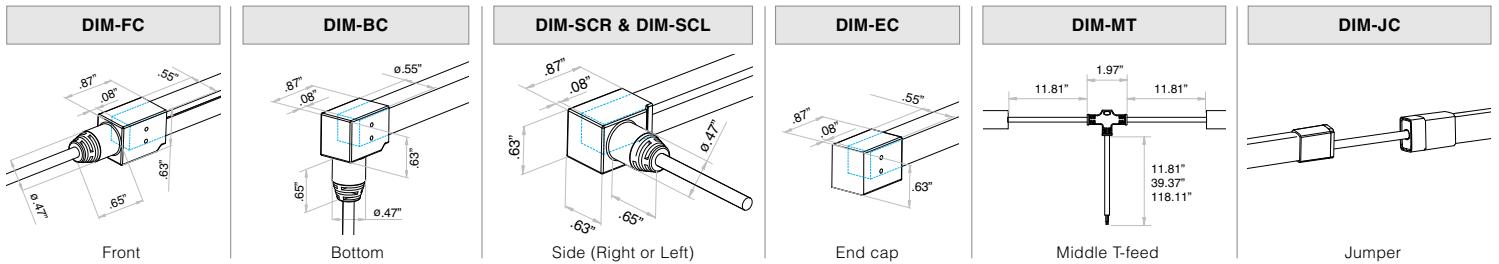


INJECTED-MOLDED CONNECTOR - IP67 | SILICONE

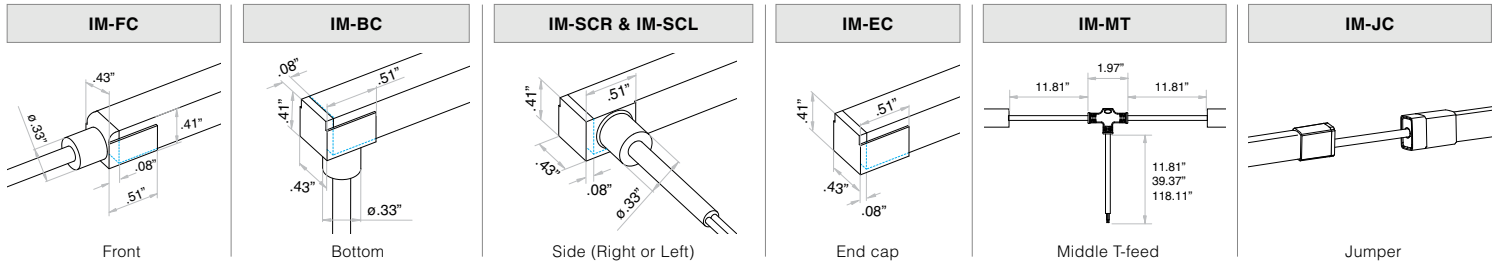

DIY Connectors - IP20

NOTE: When specifying non-injected molded connectors, connectors will be sent separately from fixture to be applied in the field.

SWIVEL CONNECTOR - IP20 | PVC & SILICONE

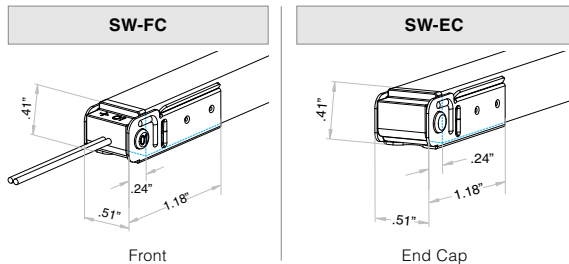




Compatible Power Supplies See website for additional power supply options





Compatible Extrusions and Clips

NOTE: All extrusions are field cuttable and can be used with either silicone or PVC housings.
1.5" length acts as a clip when used.




FLQ-NONL: Non self-locking aluminum profile
Finish: Satin
Available lengths: 1.5", 19.75", 39.5", 79"





FLQ-NONL-FL: Non self-locking flanged aluminum profile
Finish: Satin
Available lengths: 1.5", 19.75", 39.5", 79"



FLQ-SELF-SR: Self-locking serrated aluminum profile
Finish: Satin
Available lengths: 1.5", 19.75", 39.5", 79"



FLQ-SELF-FL: Self-locking flanged serrated aluminum profile
Finish: Satin
Available lengths: 1.5", 19.75", 39.5", 79"



FLQ-SELF-BD: Self-locking bendable serrated aluminum profile
Finish: Satin
Available lengths: 19.75", 39.5"

