

FLEX-SQUARE

FLEX Light: RGBW



The FLEX series is ideal for spaces where the light will be in direct view. As the name implies, these LED lights are flexible and can be easily molded into different curvatures. The housing and the lens allow for a perfect monochromatic light source with no hot spots. All of Q-Tran's FLEX series fixtures are made with high-quality SMD LED chips, are UV and flame resistant and are extremely energy-efficient.


The FLEX Square RGBW is a color changing light which is controlled by either a Q-Tran supplied DMX controller or one provided by a third party.

Technical Information




CCT	Lumen/ft	Wavelength
Red	51	630
Green	119	519
Blue	26	465

CCT	Lumen/ft	CRI
2700K	80	87
4000K	99	83

Housing Color




Dimensions



VB: Vertical Bending

Part Number Builder

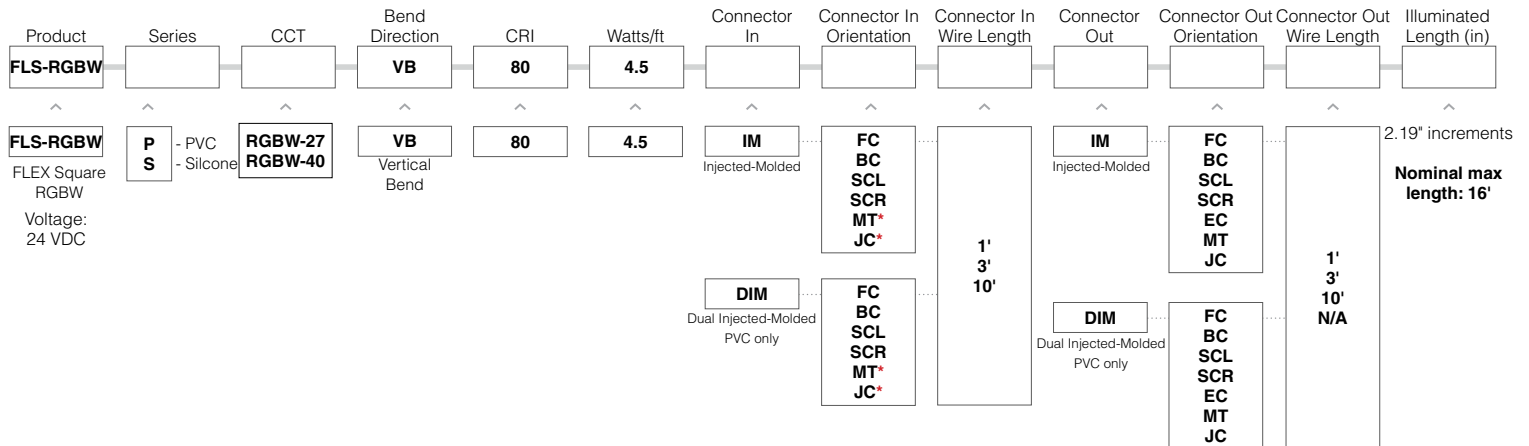

- Product length = illuminated length + connector length
- For factory assembled connector information, see page 2
- For compatible power supplies, see page 2
- For extrusion options, see page 3 (sold separately)
- *Used in conjunction with Connector/Orientation Out

- 2 year warranty
- Impact rating of IK08
- IP67 rated when ordered with IP67 connectors
- Ambient temperature: -4°F to +113°F
- UV & Flame resistant construction
- No diode imaging
- Max run is 30'
- PVC - standard
- Silicone - best for outdoor applications




FLEX-SQUARE

FLEX Light: RGBW




Injected Molded Connectors - IP67 & IP68


INJECTED-MOLDED CONNECTOR - IP67 | PVC

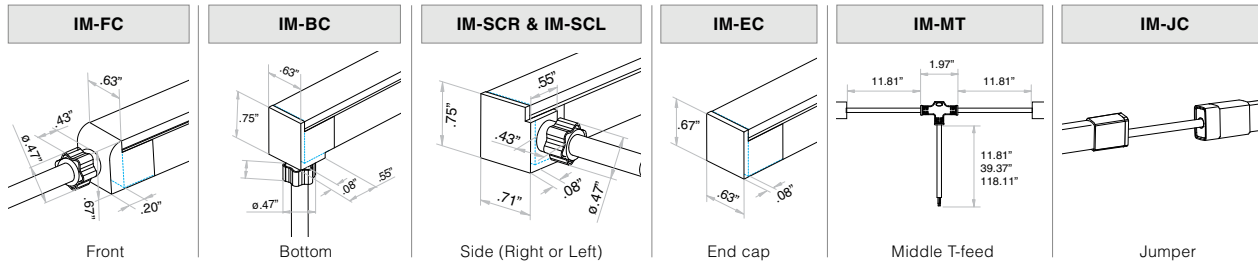


INJECTED-MOLDED CONNECTOR - IP68 | SILICONE

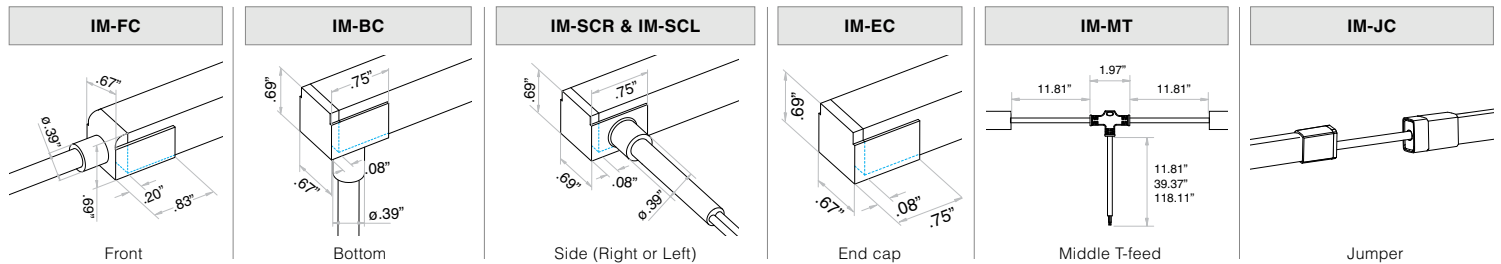

DUAL INJECTED-MOLDED CONNECTOR - IP68 | PVC

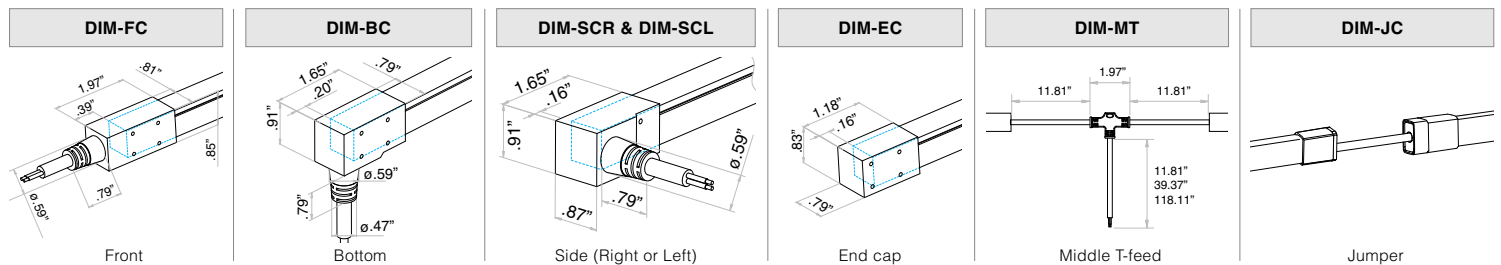

Compatible Power Supplies See website for additional power supply options

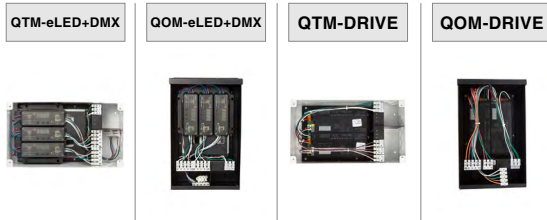

FLEX-SQUARE

FLEX Light: RGBW





Compatible Extrusions and Clips

NOTE: All extrusions are field cuttable and can be used with either silicone or PVC housings.
1.5" length acts as a clip when used.

FLS-NONL: Non self-locking aluminum profile

Finish: Satin




Available lengths: 1.5", 19.75", 39.5", 79"



FLS-NONL-FL: Non self-locking flanged aluminum profile

Finish: Satin




Available lengths: 1.5", 19.75", 39.5", 79"



FLS-NONL-PL: Non self-locking plastic profile

Finish: Clear




Available lengths: 1.5", 19.75", 39.5", 79"



FLS-SELF-SR: Self-locking serrated aluminum profile

Finish: Satin



Available lengths: 1.5", 19.75", 39.5", 79"



FLS-SELF-FL: Self-locking flanged serrated aluminum profile

Finish: Satin

Available lengths: 1.5", 19.75", 39.5", 79"

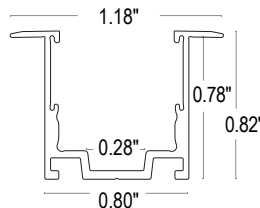

FLS-SELF-BD: Self-locking bendable serrated aluminum profile

Finish: Satin

Available lengths: 19.75", 39.5"

