

SW-IA24/5.0

STRIP: IA Static White



The industry's first individually addressable, static white LED tape. The 24-volt, 5.0-watt/foot LED tape delivers 374 lumens per foot at 3000K. Utilizing DMX and SPI protocols to control nominal 1" segments. This product offers granular control and programming capabilities such as flashing, strobing, chasing, and show cues to applications where high-quality static white CCTs are desired.

Accepted into the 2019 IES Progress Report.


Technical Information

[Calculated L70 = 40000 hours]

Tested with SW-IA24/5.0-DRY


CCT	Lumen/ft	Luminous Efficacy	CRI Ra	CRI R9	TM30 Rf	TM30 Rg
● 2700K	***	***	***	***	***	***
● 3000K	374	75 Lm/W	98	96	94	102
● 3500K	***	***	***	***	***	***
○ 4000K	***	***	***	***	***	***

Dimensions



Section (in)	A	B	C	D	E
DRY (IP20)	0.39"	0.37"	3.35"	0.073"	1.10"

Part Number Builder

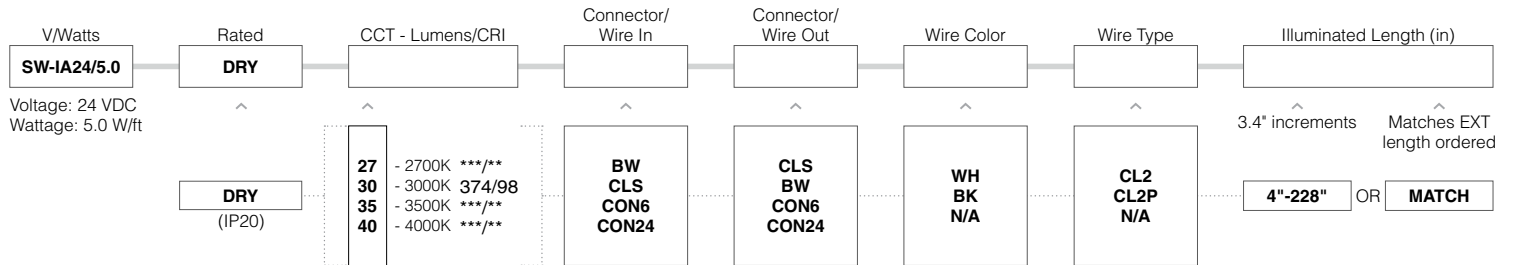

- **BW** comes in standard 24"- request custom length (Max 120") by writing it in inches next to "BW" in the order code box (ex. BW48)
- Wire orientation for **MATCH** will be dictated by extrusion Feed In/Feed Out selection
- **Connector/Wire In or Out** not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out
- **CL2** wire is standard non-plenum wire, **CL2P** wire is plenum rated

- 5 year warranty
- Field modifications must comply with Q-Tran's installation methods otherwise warranty is null & void
- All data has +/- 5% tolerance
- UL Listed



SW-IA24/5.0

STRIP: IA Static White




Compatible Extrusions

	SLIM	WIDE	ROND	TORQ	TRE3	LALO	TALO
DRY	✓	✓	✓	✓	✓	✓	✓
DMP							
ENC							
WET							


	ARKA	TELA	VEVE	FLUR	EMBD	LATO	MDIN	OPTI
DRY	✓	✓	✓	✓	✓	✓	✓	
DMP								
ENC								
WET								

Connector/Wire – In/Out

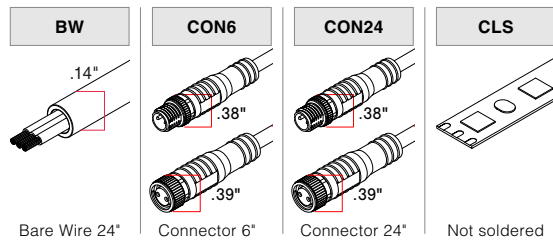

Compatible Power Supplies

See website for additional power supply options



Compatible Accessories

iQ-DMX-STICK-GA2

