

TALO's modern design is complemented by its sleek flat lens and end caps that promote full luminosity. It not only utilizes a hidden stainless steel mounting clip but is also compatible with a plastic T-Bar clip for grid ceiling applications and can be used with LEDs up to 7.5 watts/foot. It is available in both satin and black finishes. Lens options are clear, polar, frosted, and diffused. TALO can also be encapsulated in either clear or translucent polyurethane to create a complete fixture solution.


Finish




SATIN

BLACK

Dimensions




Profile



Profile with flat lens

Mounting


HSS



Hidden stainless steel clip

2 clips provided for 4' or less; 4 clips provided for greater than 4'


TBC



Plastic T-Bar clip

Standard 1"(15/16) grid clips
2 clips provided per first 12",
1 clip provided per additional foot

Part Number Builder

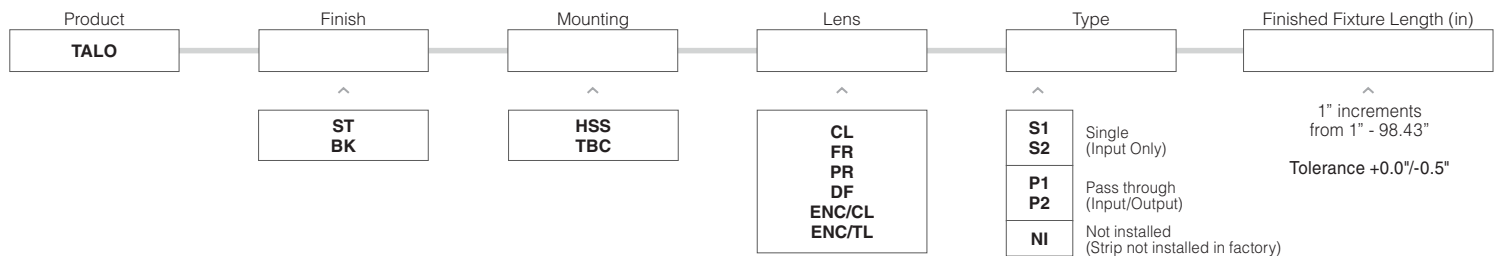


- Field modifications must comply with Q-Tran's installation methods otherwise warranty is null & void
- UL Listed when assembled with STRIP LEDs at Q-Tran
- Surface mount
- Two encapsulation options: clear and translucent
- Suitable for installation in the storage area of a clothes closet when assembled as a fixture at Q-Tran facility (Not applicable for encapsulation or LED strips exceeding 4W/ft)
- IK10 rated when encapsulation is chosen




Compatible Strips

	STATIC WHITE (SW)	STATIC WHITE INDIVIDUALLY ADDRESSABLE (SW-IA)	STATIC WHITE STOCKING DISTRIBUTOR (SD-SW)	STATIC WHITE HIGH EFFICACY (SW-HE)	STATIC WHITE HIGH EFFICACY PLUS (SW-HE+)	DYNAMIC WHITE (DW)	DYNAMIC WHITE HIGH EFFICACY (DW-HE)	STATIC COLOR (SC)	WARM DIM (WD)	RGB	RGBW	RGBW HIGH EFFICACY (RGBW-HE)
	1.5W/ft 3.0W/ft 4.0W/ft 5.0W/ft 6.0W/ft	5.0W/ft	2.0W/ft 4.0W/ft 6.0W/ft	1.5W/ft 3.0W/ft 6.0W/ft 9.0W/ft	3.0W/ft 6.0W/ft	6.0W/ft	3.0W/ft 5.0W/ft 8.0W/ft	5.0W/ft	6.0W/ft	6.0W/ft	6.0W/ft	4.0W/ft 8.0W/ft
DRY	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
DMP	✓			Not compatible with 9.0		✓	Not compatible with 8.0	✓		✓	✓	Not compatible with 8.0
ENC	✓			Not compatible with 9.0		✓	Not compatible with 8.0	✓		✓	✓	Not compatible with 8.0
WET	✓		✓		✓	✓	✓	✓	✓	✓		Not compatible with 8.0


Length (in) Add to nominal LED length for fixture length

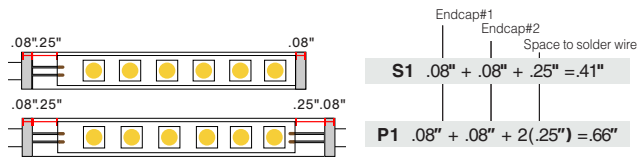

End Caps

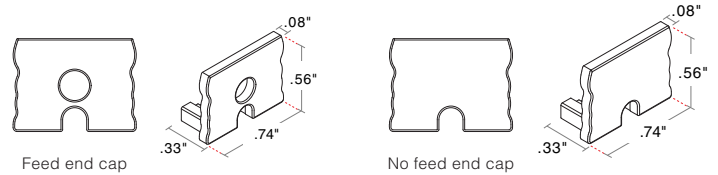

Lens with LED visibility

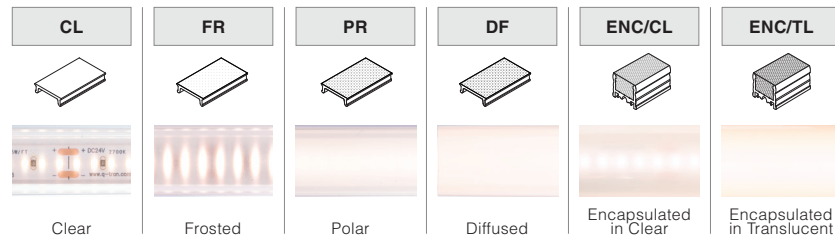

Cut Off



Type

SINGLE (Input only)

PASS THROUGH (Input/Output)

