

WALA-SW Q-CAP Flexible Fixtures - MICRO 5 SERIES




WALA-SW is a fully encapsulated flexible linear LED fixture suitable for use in a variety of applications. Because of its dry and wet rating, it is perfect for not only indoor use but also as outdoor accent lighting where the fixture is visible. WALA-SW encapsulates our 24-volt static white LED strips in polyurethane. Offered in three different outputs: standard output (1.0W/ft), high output (2.0W/ft), and very high output (4.0W/ft). WALA-SW has a unique side bend with a 6" bending radius and it is compatible with three different mounting hardware options to ensure our product fits any design need. Available in a seamless option, where wires are hidden so they do not obstruct the look of the design. Utilize clear endcaps for continuous runs with no light loss.

Output [Calculated L70 = 40000 hours]


Tested for WALA-SW-WSC-DRY

CCT	SO Standard Output 1 W/ft				HO High Output 2 W/ft				VHO Very High Output 4 W/ft			
	ENC/CL		ENC/TL		ENC/CL		ENC/TL		ENC/CL		ENC/TL	
	LM	CRI	LM	CRI	LM	CRI	LM	CRI	LM	CRI	LM	CRI
2400K	39	93	38	93	102	93	97	92	259	93	246	93
2700K	40	94	35	96	104	93	92	95	263	94	239	96
3000K	40	96	39	96	105	96	103	96	271	97	266	96
3500K	41	98	39	98	107	98	102	98	268	98	263	98
4000K	43	98	42	98	112	98	111	98	289	97	285	97

Dimensions

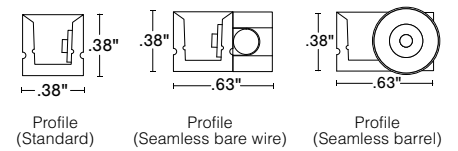

Wiring Detail




Part Number Builder

Product	Mounting	Rated	CCT	Output	Lens	Type	Connector/ Wire in	Connector/ Wire out	End Caps (No feed)	Length (in)	
WALA-SW											
Voltage: 24 VDC Wattage: see table ENCAPSULATED PRODUCTS ARE NOT FIELD CUTTABLE	WSC PPS-2 PPS-96 PPS-FT PPS-LP-2 PPS-LP-96 PPS-LP-FT	DRY (IP20) WET (IP67)	24 - 2400K 27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K	SO (1.0W) HO (2.0W) VHO (4.0W)	ENC/CL ENC/TL	Single (Closed exit) Pass through	S1 S5 S6 P1 P5 P6	BW BRL CON6 CON24 BW BRL CON6 CON24	N/A BW BRL CON6 CON24	CL WH N/A	

- **BW** comes in standard 24" - request custom length (Max 120") by writing it in inches next to "BW" in the order code box (ex. BW48)
- **Connector/Wire In or Out** not needed to specify product. Standard configuration is type S1, Connector/Wire In: BW & Connector/Wire Out: N/A with white endcaps (WH)
- **PPS** mounting clip recommended for seamless applications

Flexibility

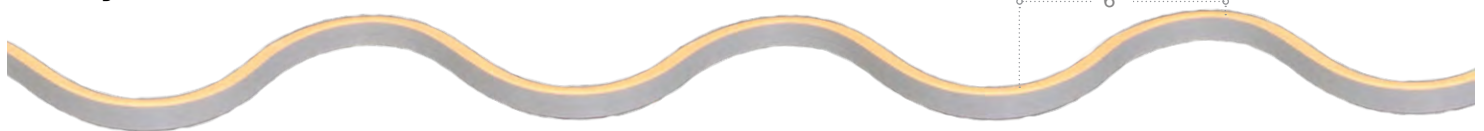


- Field modifications are not covered under Q-Tran warranty
- 5 year warranty
- Side Bend
- Data subject to change, all data has +/- 5% tolerance
- **PPS-FT** and **PPS-LP-FT** is to be cut at Q-Tran to requested length

WALA-SW Q-CAP Flexible Fixtures - MICRO 5 SERIES




Mounting NOTE: 2 white snug clips provided per first 12", 1 for each additional 12". Other mounting styles incur additional charge, see price guide for details.

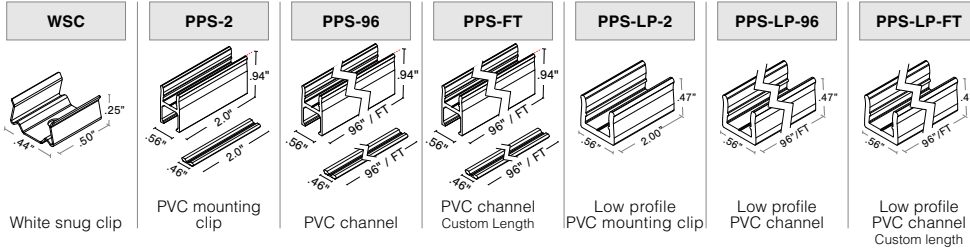


Type

SINGLE (Input only)

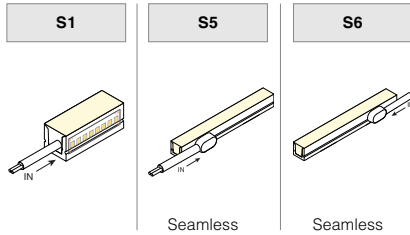


PASS THROUGH (Input/Output)

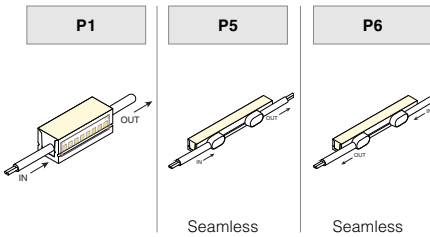


Ambient Temperature Limits

WAVE		Minimum (°F)	Maximum (°F)
4W	Millwork	-4	77
	Surface Mount	-4	95
2W	Millwork	-4	113
	Surface Mount	-4	122
1W	Millwork	-4	122
	Surface Mount	-4	122


End Caps (No Feed)




End Caps (With Feed)




Bend Radius




Seamless



Connector/Wire – In/Out

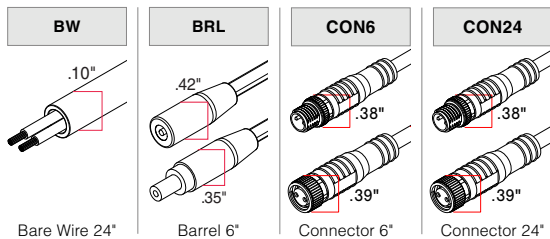

Lens with LED visibility



Compatible Power Supplies

See website for additional power supply options

