

# ZALA-SC

## Q-CAP Flexible Fixtures




ZALA-SC is a fully encapsulated flexible linear LED fixture suitable for use in a variety of applications. It uses the same profile as BOXA, but with the LED mounted on the side. Because of its dry and wet rating, it is perfect for not only indoor use but also as outdoor accent lighting where the fixture is visible. ZALA-SC encapsulates our static color 24-volt LED strips in polyurethane. Unique side bend with a 6" bending radius. Offered in very high output (5.0W/ft) and available in a clear finish, where diodes are visible, or a translucent finish, where light is diffused. Colors include green, blue, red, and amber. Red and amber are turtle-friendly, FWC (Florida Fish and Wildlife Conservation Commission) approved.

### Output [Calculated L70 = 40000 hours]

Tested for ZALA-SC-WSC-DRY

CCT	VHO Very High Output			
	ENC/CL		ENC/TL	
	LM	CRI	LM	CRI
Red	101	633	75	633
Green	439	519	302	520
Blue	109	468	66.6	467
Amber	94	594	66.1	594

### Dimensions

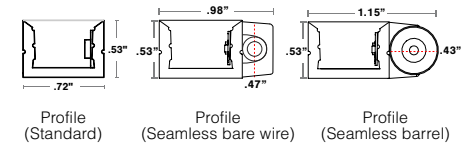

### Wiring Detail




### Part Number Builder

Product	Mounting	Rated	CCT	Output	Lens	Type	Connector/ Wire in	Connector/ Wire out	End Caps (No feed)	Length (in)
ZALA-SC				VHO						
<div>           Voltage: 24 VDC            Wattage: 5.0W/ft            *White snug clip included with side graze channel            ENCAPSULATED PRODUCTS ARE NOT FIELD CUTTABLE         </div> <div>           WSC            RLC            MC            SGC            PPS-2            PPS-96            PPS-FT            PPS-LP-2            PPS-LP-96            PPS-LP-FT         </div> <div>           DRY (IP20)            WET (IP67)         </div> <div>           G            B            R            A            - Green            - Blue            - Red            - Amber         </div> <div>           VHO (5.0W)         </div> <div>           ENC/CL            ENC/TL         </div> <div>           Single (Closed exit)            S1            S2            S3            S4            S5            S6         </div> <div>           BW BRL            N/A         </div> <div>           CL WH         </div> <div>           12"-191"            Consult factory for lengths under 12".         </div> <div>           Pass through            P1            P2            P3            P4            P5            P6         </div> <div>           BW BRL            BW BRL         </div> <div>           N/A         </div>										


- **BW** comes in standard 24" - request custom length (Max 120") by writing it in inches next to "BW" in the order code box (ex. BW48)
- **Connector/Wire In or Out** not needed to specify product. Standard configuration is type S1, Connector/Wire In: BW & Connector/Wire Out: N/A with white endcaps (WH)
- **PPS** mounting clip recommended for seamless applications

### Flexibility

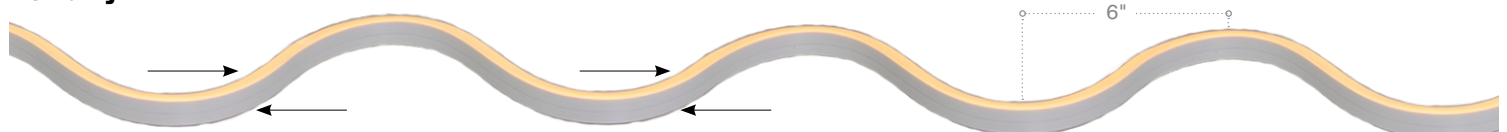


- 5 year warranty
- Field modifications are not covered under Q-Tran warranty
- Side Bend
- IK10 impact rated
- Data subject to change, all data has +/- 5% tolerance
- **PPS-FT** is to be cut at Q-Tran to requested length
- Max ambient 105° F

**Mounting** NOTE: 2 white snug clips provided per first 12", 1 for each additional 12". Other mounting styles incur additional charge, see price guide for details.


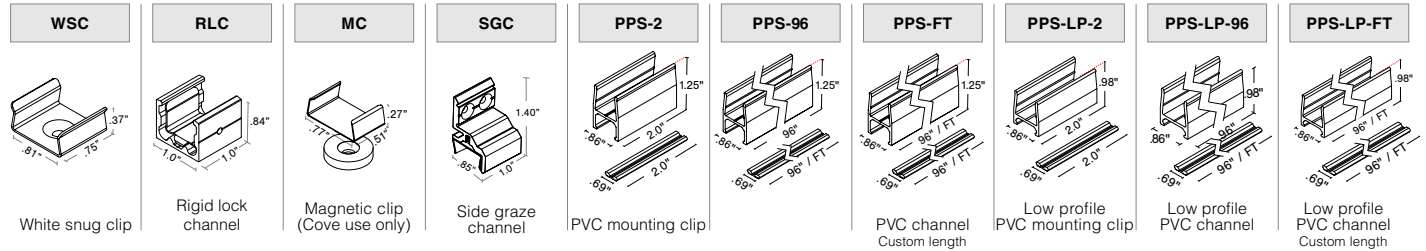


### Type



SINGLE (Input only)

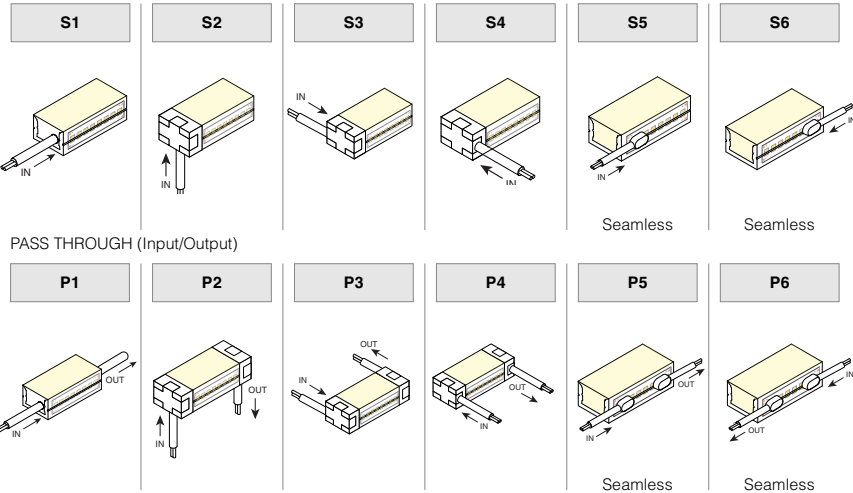


### End Caps (No Feed)



### End Caps (With Feed)




### Bend Radius



### Seamless

Shown with bare wire, connectors vary




### Compatible Accessories

See website for additional accessories options


#### Q-ANGLE



### Connector/Wire – In/Out



### Lens with LED visibility



### Compatible Power Supplies

See website for additional power supply options

