





FIZZIX™

MODULAR LED LIGHTING SYSTEM


Fixture Type: _____

Project: _____

Location: _____



Length: FZX-4—3.94" (100mm), FZX-12—11.8" (300mm),
 FZX-24—22.8" (580mm), FZX-36—34.6" (880mm), FZX-48—46.5" (1180mm)



MODEL	FZX-300-4	FZX-300-12	FZX-300-24	FZX-300-36	FZX-300-48
WATTS	1.25W	3.7W	8W	12W	16W
LUMENS	88 lm	259 lm	560 lm	840 lm	1,120 lm
LENGTH	3.94" (100mm)	11.8" (300mm)	22.8" (580mm)	34.6" (880mm)	46.5" (1180mm)

PRODUCT FEATURES

- Direct View Without Diode Imaging
- Illuminated Modular Corners and Connections
- Magnetic or Fixed Mounting
- For Use with 24V Power Supplies
- Dimmable


SPECIFICATIONS

Input Voltage	24VDC
Beam Angle	120°
CRI	90+
Dimensions (W × H)	0.43" (11mm) × 0.46" (11.8mm)
Dimming Options	PWM, Triac, 0-10V, DMX, Hi-lume
Max Run Length	16.4ft (5m) per Power Feed
Use Temp Range	-4°F (-20°C) to 113°F (45°C)

ORDERING INFORMATION

Example: FZX-300-27K-4-24V-SV

Item	Output	CCT	Length	Voltage	Color
FZX—Fizzix	300—300 lm/ft	27K—2700K 30K—3000K 35K—3500K 40K—4000K 50K—5000K	4—3.94" 12—11.8" 24—22.8" 36—34.6" 48—46.5"	24V—24V	SV—Silver




Conforms to ANSI/UL Standard 1598
 Certified to CAN/CSA Standard C22.2 No. 250.0





FIZZIX™ CORNER AND JUNCTION


STANDARD CORNER

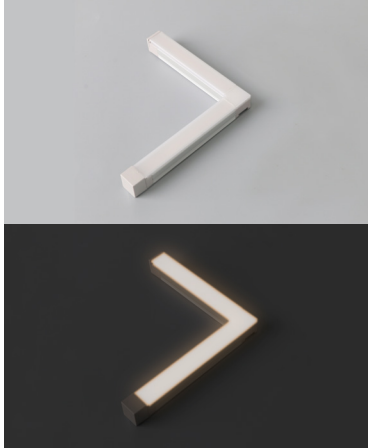

Example: FZX-27K-C

Item	CCT	Shape	Finish
FZX		C	
FZX —Fizzix	27K —2700K 30K —3000K 35K —3500K 40K —4000K 50K —5000K	C —Standard Corner	SV —Silver

Watts	2.22W
Lumens	155 lm
Dimensions	3.58" × 3.35" × 0.46" (91 × 85 × 11.8mm)




INSIDE CORNER



Example: FZX-27K-I

Item	CCT	Shape	Finish
FZX		I	
FZX —Fizzix	27K —2700K 30K —3000K 35K —3500K 40K —4000K 50K —5000K	I —Inside Corner	SV —Silver

Watts	2.22W
Lumens	155 lm
Dimensions	3.86" × 3.74" × 0.46" (98 × 95 × 11.8mm)




OUTSIDE CORNER



Example: FZX-27K-O

Item	CCT	Shape	Finish
FZX		O	
FZX —Fizzix	27K —2700K 30K —3000K 35K —3500K 40K —4000K 50K —5000K	O —Outside Corner	SV —Silver


Watts	2.22W
Lumens	155 lm
Dimensions	3.86" × 3.74" × 0.46" (98 × 95 × 11.8mm)






FIZZIX™ CORNER AND JUNCTION

T CONNECTOR

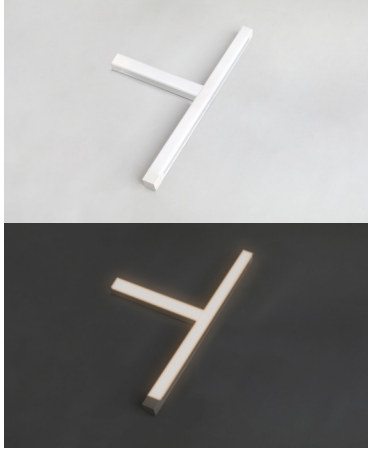


Example: FZX-27K-T

Item	CCT	Shape	Finish
FZX		T	
FZX —Fizzix	27K —2700K 30K —3000K 35K —3500K 40K —4000K 50K —5000K	T —T Connector	SV —Silver
Watts	3.55W		
Lumens	260 lm		
Dimensions	7.09" × 3.62" × 0.46" (180 × 92 × 11.8mm)		




CROSS CONNECTOR

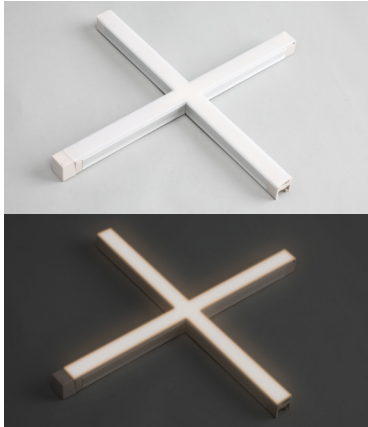

Example: FZX-27K-X

Item	CCT	Shape	Finish
FZX		X	
FZX —Fizzix	27K —2700K 30K —3000K 35K —3500K 40K —4000K 50K —5000K	X —Cross Connector	SV —Silver
Watts	4.44W		
Lumens	310 lm		
Dimensions	7.09" × 6.85" × 0.46" (180 × 174 × 11.8mm)		






FIZZIX™ MOUNTING AND POWER OPTIONS

FLAT MOUNTING CLIP

Mounts flat.

FZX-CM-CLP-FL

Included with every fixture

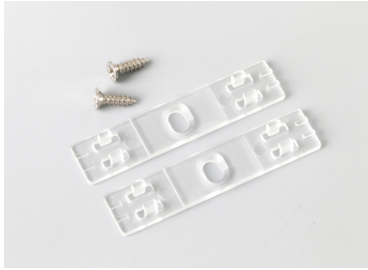

ANGLED MOUNTING CLIP

Mounts at a 45° angle.

FZX-CM-CLP-45



MAGNETIC MOUNTS

3M® Adhesive magnets.


FZX-CM-MM



HARDWARE POWER FEED

Connects Fizzix to power supply.


FZX-CM-PWR-HW-72-SV

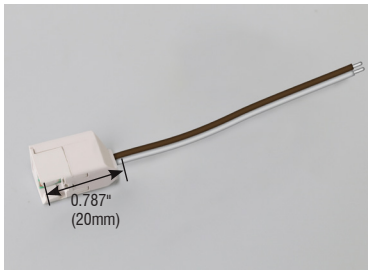

CORD COUPLER

Connects Fizzix.

FZX-CM-JP-6-SV

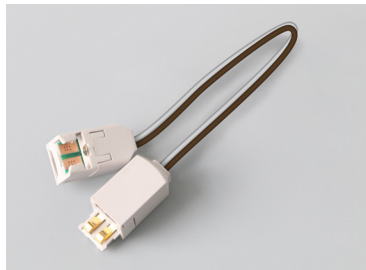

END CAPS

Covers Terminals.

FZX-CM-EC-SV

Included with every fixture

