
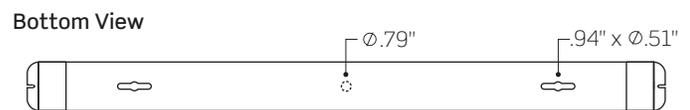


DATE

PROJECT

TYPE

SW SERIES | Surface Wrap LED Linear Series



	SW2: 2 Ft/24 In	SW4: 4 Ft/48 In
WATTAGE	20W	40W
LUMEN OUTPUT ¹	2047Lm	4094Lm
COLOR TEMPERATURE	2700K / 3000K / 3500K / 4000K	
CRI	83 (80min)	
MOUNTING	Surface Mount	
DIMMING	Non-Dimming	
FINISH	Matte White with Opaque White High Impact Acrylic Lens	
LISTINGS	ETL Certified for use in the U.S. and Canada Must be installed in accordance to all product specific installation instructions and appropriate National Electrical Codes Suitable for use in closets when installed in accordance with NFPA® 70, NEC® Section 410.16	
WARRANTY	Five (5) year replacement after date of purchase	
SYSTEM RATING	50,000 Hours @ 70% Lumen Maintenance	



1. Approximate lumen output based on 3000K performance; see photometric test results for additional information

ORDERING INFORMATION

Example Order: -

Length	CCT/CRI	Driver	Finish
SW2 - 2 Ft/24 In	83 (80min) CRI	MV - 120 - 277V	P - White
SW4 - 4 Ft/48 In	27K - 2700K		
	30K - 3000K		
	35K - 3500K		
	40K - 4000K		

DATE

PROJECT

TYPE

SW SERIES | Surface Wrap LED Linear Series

PRODUCT DETAILS

Construction

- Commercial Grade 2 Ft and 4 Ft Surface Mount Wrap luminaires
- Matte White finish with Opaque White High Impact Acrylic Lens
- Includes hardware for Surface Mounting to Ceiling or Wall

Performance Summary

- Integrated LED Strips deliver over 1000 Lm/Ft at 10W/Ft
- 2700K, 3000K, 3500K and 4000K CCT; 83 CRI
- 120-277V Integrated Non-dimming Driver

PHOTOMETRICS


SW440KMV

Fixture Delivered Lumens: 4094
 Total Watts@120V: 41.0
 Lumens Per Watt: 99.9
 Center Beam Candle Power: 1327
 Beam Distribution: 109.4° (at 0°) x
 116.1° (at 90°)
 Spacing Criterion: 1.23 @ 0°
 Color Rendering Index (CRI)¹: 84
 Color Temperature (CCT)²: 4094K
 Designed for 50,000 Hour Lamp Life³
 LM-63 Test No. 88383
 LM-79 Test No. 88383


Intensity Distribution

DISTANCE (FT.)	FOOTCANDLES (FC)	BEAM DIAMETER (FT.)
6 FT	36.9	7.5
8 FT	20.7	9.9
10 FT	13.3	12.4
12 FT	9.2	14.9
14 FT	6.8	17.4
16 FT	5.2	19.9

Candela Curve

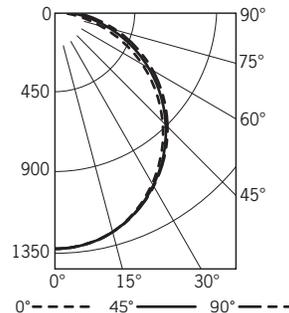

Spectral Power Distribution Chart⁴

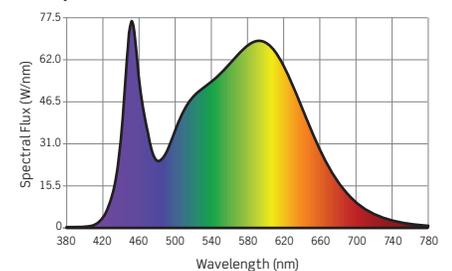

1. Accuracy of Rendering Colors 2. Color Appearance of Light Source 3. Dependent on Surrounding Temperatures 4. Colors Present within the Light Source