

Decorative Cloud™ Round Fixture

Flush Mount



DESCRIPTION

The Decorative Cloud™ Round Fixture design replaces traditional style incandescent ceiling lights. The fixture features five color temperatures switchable from 2700K, 3000K, 3500K, 4000K, 5000K, and a CRI of 90. The Decorative Cloud™ Round Fixture's profile provides a subtle but elegant aesthetics.

APPLICATIONS

Hospitality, Airports, Schools, Offices, Government Facilities, Residential, and Commercial

FEATURES



Decorative Cloud™ Round Fixture

12", 14W (1,000 lm)
14", 18W (1,400 lm)
16", 24W (2,000 lm)

Projected L70: 50,000 hours
Warranty: 5 Years
System Efficacy: Up To 80 LpW
TRIAC Dimming

Construction

Cold-rolled steel plate with powder coated paint.
High transmission frosted acrylic lens.

Electrical

Input Voltage: 120VAC

Optical System

Glare controlling lens for comfortable light distribution.
Provides a 116° beam angle.

Installation/ Mounting

Surface Mounting (4" J-box and Octagon J-box)

Warranty

5 Year Warranty.
See warranty documentation for more information.

Controls/Dimming

TRIAC Dimming
CCT Selectable between 2700K, 3000K, 3500K, 4000K, 5000K.



TITLE 24
Compliant



90+ CRI





5 CCT
Switchable



Damp
Location
Rated



Phase/TRIAC
Dimming

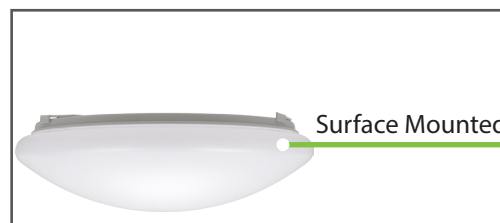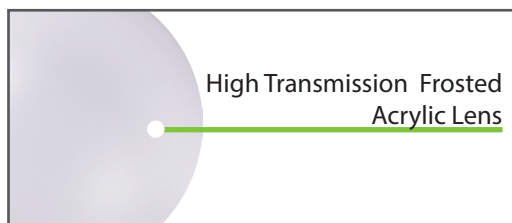

Ordering Information

EXAMPLE: CSMR-1214-CC

Series	Size/Wattage	CCT
CSMR	1214 - 12"/14W 1418 - 14"/18W 1624 - 16"/24W	CC - CCT Selectable (2700K/3000K/3500K/4000K/5000K)


Specifications and Dimensions subject to change without notice.

*MOQ and longer lead times may apply, please contact customer service for more information.

Performance Information

Input Voltage	120VAC
Input Frequency	60Hz
Wattage	See Performance Table
Delivered Lumens	See Performance Table
System Efficacy	See Performance Table
CRI	>90
Available CCT	2700K, 3000K, 3500K, 4000K, 5000K
Projected L70	50,000+ hours
Power Factor	>0.9
THD	<20%
Dimming	TRIAC Dimming
Operating Temp.	-4°~104°F
IP Rating	Damp Location Rated


Quick and Easy Installation

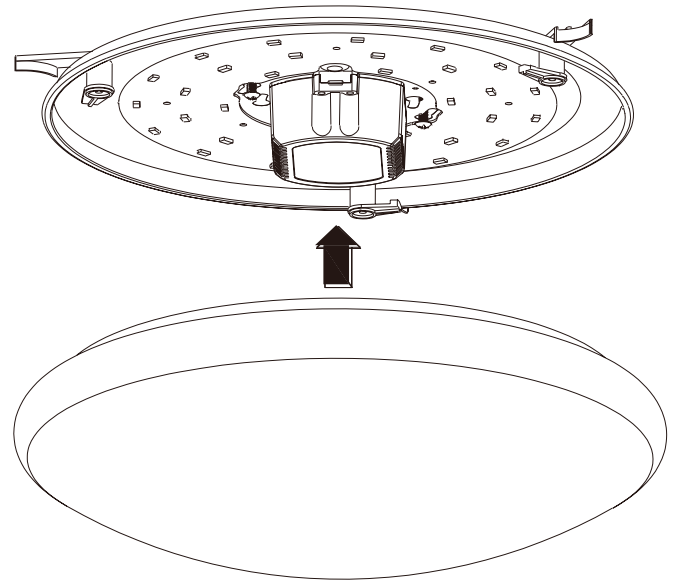

Performance Table

SKU	Size (in)	Wattage (W)	3000K	
			Delivered Lumens (lm)	System Efficacy (lm/W)
CSMR-1214-CC	ø12	14	1120	80
CSMR-1418-CC	ø14	18	1440	80
CSMR-1624-CC	ø16	24	2000	83

Product Dimensions

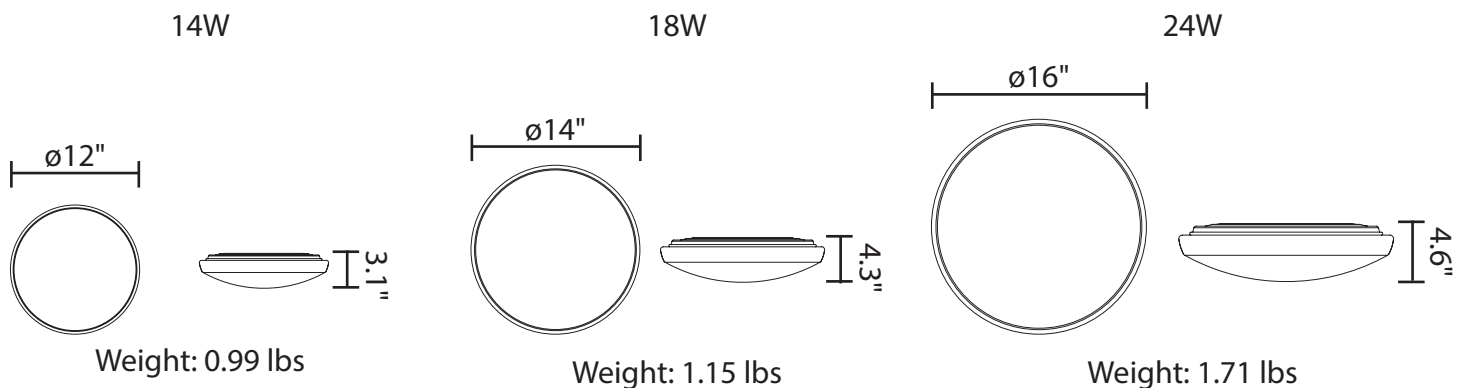

Dimmer Compatibility List

Recommended dimmers

Lutron	Leviton	EATON
DVCL-153PR-WH CTCL-153PDH-WH TGCL-153PH-WH MACL-153MH-WH P-PKG1W-WH-R	R62-06674-P0W R12-06672-1LW R50-IPL06-10M	SAL06P-LA-K