

Decorative Cloud™ Square Fixture Flush Mount



DESCRIPTION

The Decorative Cloud™ Square Fixture modern design replaces traditional style incandescent ceiling lights. The fixture features five color temperatures switchable from 2700K, 3000K, 3500K, 4000K, 5000K, and a CRI of 90. The Decorative Cloud™ Square Fixture slim profile gives it a subtle but elegant aesthetics.

APPLICATIONS

Hospitality, Airports, Schools, Offices, Government Facilities, Auto Dealerships

FEATURES

Construction

Cold-rolled steel plate with powder coated paint.
High transmission frosted acrylic lens.

Electrical

Input Voltage: 120VAC

Optical System

Glare controlling lens for comfortable light distribution.
Provides a 116° beam angle.

Installation/ Mounting

Surface Mounting (4" J-box amd Octagon J-box)

Warranty

5 Year Warranty.
See warranty documentation for more information.

Controls/Dimming

TRIAC Dimming
CCT Selectable between 2700K, 3000K, 3500K 4000K, 5000K.

Decorative Cloud™ Square Fixture

11", 20W (1,400 lm)
14", 30W (2,100 lm)
20", 44W (3,080 lm)

Projected L70: 50,000 hours
Warranty: 5 Years
System Efficacy: Up To 70LpW
TRIAC Dimming



TITLE 24
Compliant



90+ CRI




5CCT
Switchable



Damp
Location
Rated



Phase/TRIAC
Dimming

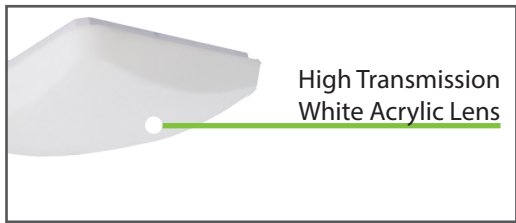

High Transmission
White Acrylic Lens



Surface Mounted

Ordering Information

EXAMPLE: SSMF-1120-CC

Series	Size/Wattage	CCT
SSMF	1120 - 11"/20W 1430 - 14"/30W 2044 - 20"/44W	CC - CCT Selectable (2700K/3000K/3500K/4000K/5000K)

Specifications and Dimensions subject to change without notice.

*MOQ and longer lead times may apply, please contact customer service for more information.


Decorative Cloud™ Square Fixture

Flush Mount

Performance Information

Input Voltage	120VAC
Input Frequency	60Hz
Wattage	See Performance Table
Delivered Lumens	See Performance Table
System Efficacy	See Performance Table
CRI	>90
Available CCT	2700K, 3000K, 3500K, 4000K, 5000K
Projected L70	50,000+ hours
Power Factor	>0.9
THD	<20%
Dimming	TRIAC Dimming
Operating Temp.	-4°~104°F
IP Rating	Damp Location Rated


Quick and Easy Installation

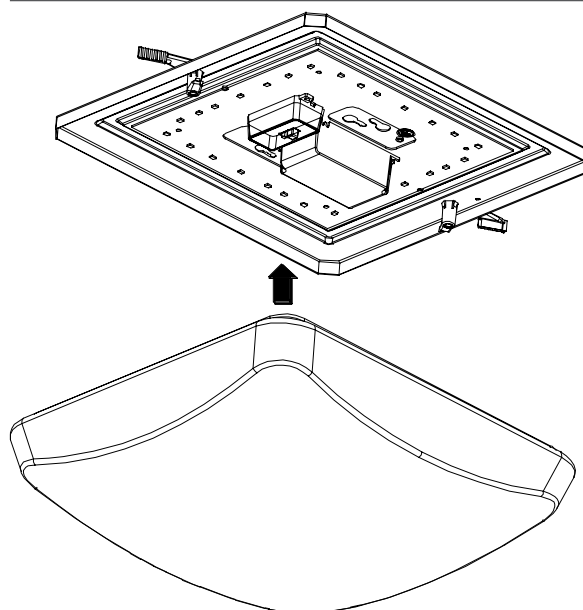

Performance Table

SKU	Size (in)	Wattage (W)	5000K	
			Delivered Lumens (lm)	System Efficacy (lm/W)
SSMF-1120-CC	11	20	1400	70
SSMF-1430-CC	14	30	2100	70
SSMF-2044-CC	20	44	3080	70

Product Dimensions

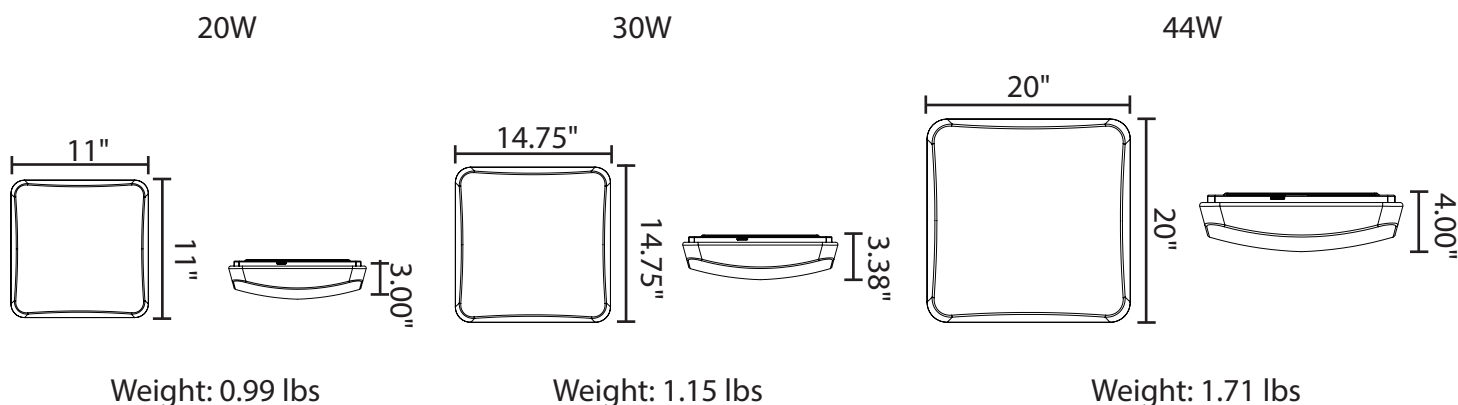

Dimmer Compatibility List

Recommended dimmers

Lutron	Leviton	EATON
DVCL-153PR-WH CTCL-153PDH-WH TGCL-153PH-WH MACL-153MH-WH P-PKG1W-WH-R	R62-06674-P0W R12-06672-1LW R50-IPL06-10M	SAL06P-LA-K