



Decorative Outdoor Wall Mount **Surface Mount**

DESCRIPTION

The Decorative Outdoor Wall Mount Light replaces traditional incandescent outdoor lighting while providing a modern style. The luminaire provides a excellent performance while providing a consistant color with same light quality as a incandescent light.

APPLICATIONS

Hospitality, Schools, landscaping, and Residential

FEATURES



Decorative Outdoor Wall Mount Light

10", 14W (1,080 lm)
 Projected L70: 50,000 hours
 Warranty: 5 Years
 System Efficacy: 75 LpW

Construction

Die-cast aluminum housing with powder coated paint.

Electrical

Input Voltage: 120VAC

Optical System

Frosted PC lens 138° beam angle provides an even and comfortable diffusion of illumination.

Installation/ Mounting

Surface Mount (Wall) (4" J - box or Octagon J-box)





Phase/TRIAC Dimming (120V) Wet Location Rated

Warranty

5 Year Warranty.
 See warranty documentation for more information.

Controls/Dimming

Triac Dimming

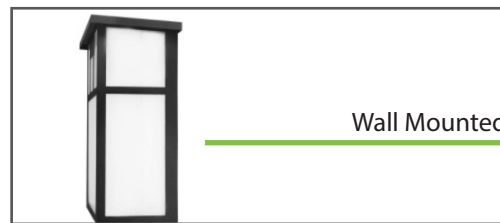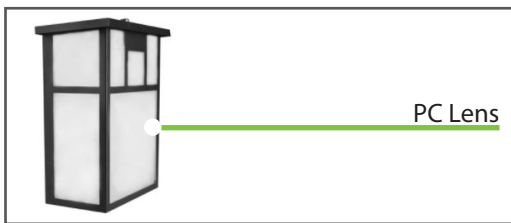

Ordering Information

EXAMPLE: ODWM-1014-40-D

Series	Size and Wattage	CCT	Dimming Option
ODWM- Outdoor Decorative Wall Mount	1014 - 10", 14W	27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K 50 - 5000K	D - Triac Dimming

Specifications and Dimensions subject to change without notice.

*MOQ and longer lead times may apply, please contact customer service for more information.


Performance Information

Input Voltage	120VAC
Input Frequency	60Hz
Wattage	See Performance Table
Delivered Lumens	See Performance Table
System Efficacy	See Performance Table
CRI	>80
Available CCT	2700K, 3000K, 3500K, 4000K, 5000K
Projected L70	50,000+ hours
Power Factor	>0.9
THD	<20%
Dimming	Yes
Operating Temp.	-4°~113°F
IP Rating	Wet Location Rated

Photometric Data

14W, 3000K


*IES Available Upon Request

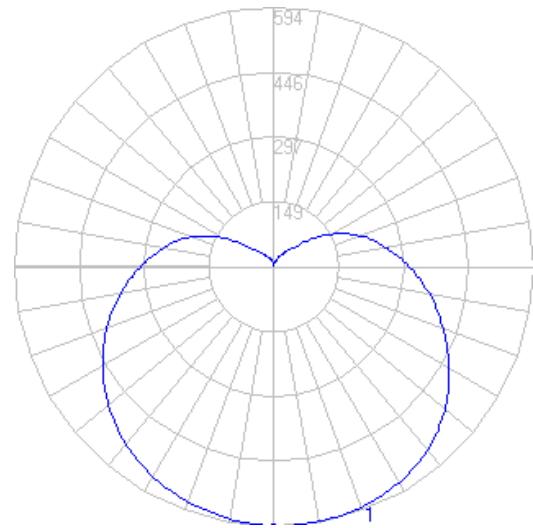

Performance Table

SKU	Size (in)	Wattage (W)	3000K	
			Delivered Lumens (lm)	System Efficacy (lm/W)
ODWM-1014-30-X	10	14	1050	75

Product Dimensions

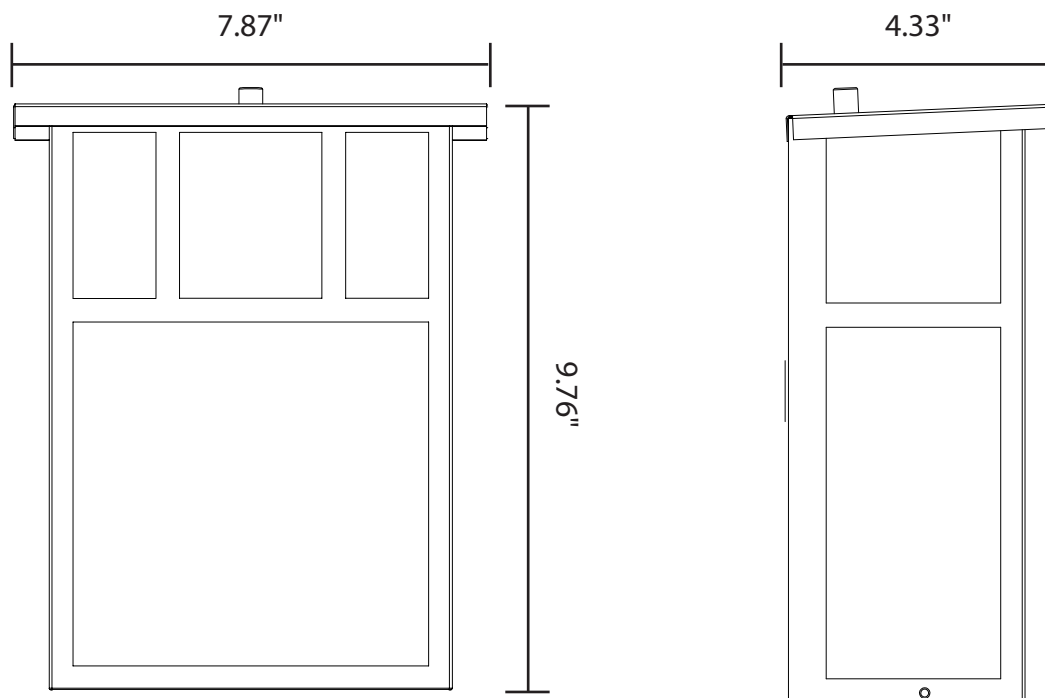

Weight: 1.6 lbs.