



Double Ring Oval Fixture

Flush Mount

DESCRIPTION

The Double Ring - Oval Fixture design provides a touch of modern aesthetics to any location. The high transmission acrylic lens provides a comfortable diffused illumination. Ideally is suited for large kitchens, living rooms, office spaces, and entryways.

APPLICATIONS

Hospitality, Airports, Schools, Offices, Commercial, Residential

FEATURES

Construction

Cold-rolled steel with powder coated paint.
Finish available in Satin Nickel
High transmission white acrylic lens.

Electrical

Input Voltage: 120VAC

Optical System

Glare controlling lens for comfortable light distribution.
Provides a 120° beam angle.

Installation/ Mounting

Flush Mount (4" J-box and Octagon J-box)

Warranty

5 Year Warranty.
See warranty documentation for more information.

Controls/Dimming

TRIAC Dimming

Double Ring Oval Fixture

32", 48W (3,360 lm)

Projected L70: 50,000 hours

Warranty: 5 Years

System Efficacy: 70 LpW





TITLE 24
Compliant



Phase/TRIAC
Dimming



Damp
Location
Rated

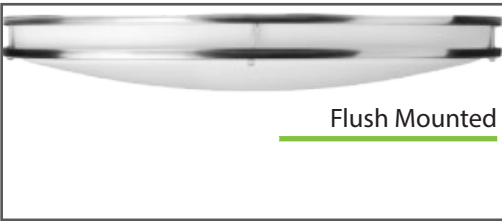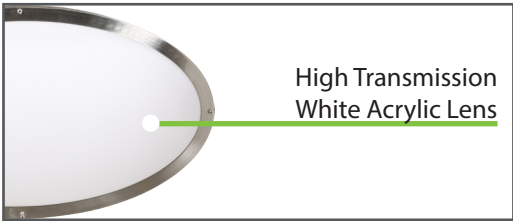

Ordering Information

EXAMPLE: OSMR-3248-40-SN

Series	Size and Wattage	CCT	Finish
OSMR - Oval Surface Mount Round	3248 - 32", 48W	27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K	SN - Satin Nickle

Specifications and Dimensions subject to change without notice.
 *MOQ and longer lead times may apply, please contact customer service for more information.

Double Ring Oval Fixture

Flush Mount


Performance Information

Input Voltage	120VAC
Input Frequency	60Hz
Wattage	See Performance Table
Delivered Lumens	See Performance Table
System Efficacy	See Performance Table
CRI	>80
Available CCT	2700K, 3000K, 3500K, 4000K
Projected L70	50,000+ hours
Power Factor	>0.9
THD	<20%
Dimming	0-10V Dimming
Operating Temp.	-4°~104°F
IP Rating	Damp Location Rated

Photometric Data

32W, 3000eK


*IES Available Upon Request

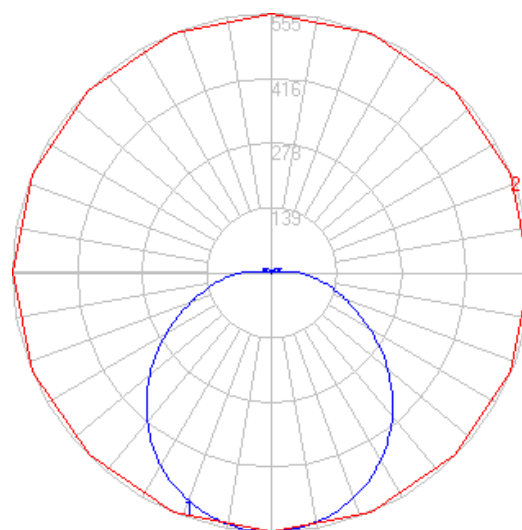

Performance Table

SKU	Size (in)	Wattage (W)	3000K	
			Delivered Lumens (lm)	System Efficacy (lm/W)
OSMR-3248-40-XX	32	48	3360	70

Product Dimensions

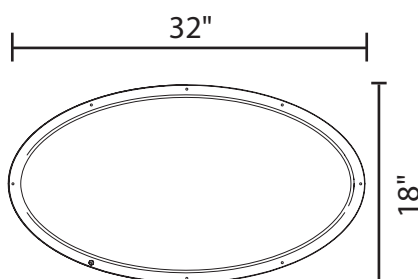

Weight: 7.43 lbs

Dimmer Compatibility List

Recommended dimmers

Lutron	Leviton	EATON
DVCL-153PR-WH CTCL-153PDH-WH TGCL-153PH-WH MACL-153MH-WH P-PKG1W-WH-R	R62-06674-P0W R12-06672-1LW R50-IPL06-10M	SAL06P-LA-K