


**CONTOUR™ Troffer**

Wattage &amp; CCT Selectable Architectural Troffer

**MOUNTING OPTIONS**

Recessed  
Mounted  
Integral Clips  
[T-bar]  
(Standard)



Surface  
Mount Kit  
1'x4', 2'x2', 2'x4'  
(Option)  
[8814-SK]  
[8822-SK]  
[8824-SK]



Flange  
Mount Kit  
1'x4', 2'x2', 2'x4'  
(Option)  
[8814-FMK]  
[8822-FMK]  
[8824-FMK]

**APPLICATIONS**

Commercial, Retail, Institution, and Hospitality

**FEATURES****Construction**

- Extruded Aluminum Housing
- Backlit

**Finish**

- Powder Coated White

**Electrical & Technical**

- Input Voltage: 110-277V  
110-347V\* [Option]
- Input Frequency: 50/60Hz
- Projected L70 > 50,000 hrs
- PF: >0.9
- CRI: 80
- THD: <20%
- CCT Selectable: 3500K/4000K/5000K
- Field Adjustable Lumen Output
- Operating Temp.: -4°F ~ 104°F
- Class 2 Driver (1-10V Dimming)
- IP Rating: Damp Location Rated
- Emergency Battery Backup Option  
[Factory Installed]
- 12W Emergency Inverter Option
- 10W Bodine Inverter Option

**Optical**

- 120° Beam Angle

**Installation/Mounting**

- Recessed Mounted (Standard)
- Surface Mount Kit (Option)
- Flange Mount Kit (Option)

**Controls**

- 1-10V Dimming (Dims to 10%)

**Warranty**

- 5 Year Warranty
- See warranty documentation for more information.

**Dimmer Compatibility List:**

Leviton: IP-710-DL

Lutron: Diva-Dvtv

**Lumen Output**

- 1'x4': 25W (2,750lm)/30W (3,300lm)/35W (3,850lm)
- 2'x2': 25W (2,750lm)/30W (3,300lm)/35W (3,850lm)
- 2'x4': 30W (3,300lm)/40W (4,400lm)/50W (5,500lm)


Not all products are qualified on the DLC® QPL. To view our DLC® qualified products, please consult the DLC® Qualified Products List at [www.designlights.org/qpl](http://www.designlights.org/qpl).

**ORDERING INFORMATION****EXAMPLE: CT-22WS-C-U**

CT				
Series	Size	Wattage	CCT	Input Voltage
CT	14 - 1'x4' 22 - 2'x2'	WS - 25W/30W/35W	C - 3500K/4000K/5000K	U - 110-277V H - 110-347V*
	24 - 2'x4'	WS - 30W/40W/50W		

Surface Mount Kit	Flange Mount Kit	Accessories
8814-SK (1x4 Surface Mount Kit) 8822-SK (2x2 Surface Mount Kit) 8824-SK (2x4 Surface Mount Kit)	8814-FMK (1x4 Flange Mount Kit) 8822-FMK (2x2 Flange Mount Kit) 8824-FMK (2x4 Flange Mount Kit)	90008-H (8W Emergency Battery Backup) ELIS10CDF (Bodine 10W Inverter) WP-CEP-12C-200VPE1 (EM Inverter 12W) T-BR-EM (T-Bar Bracket for EM Backup)

## DIMENSIONS

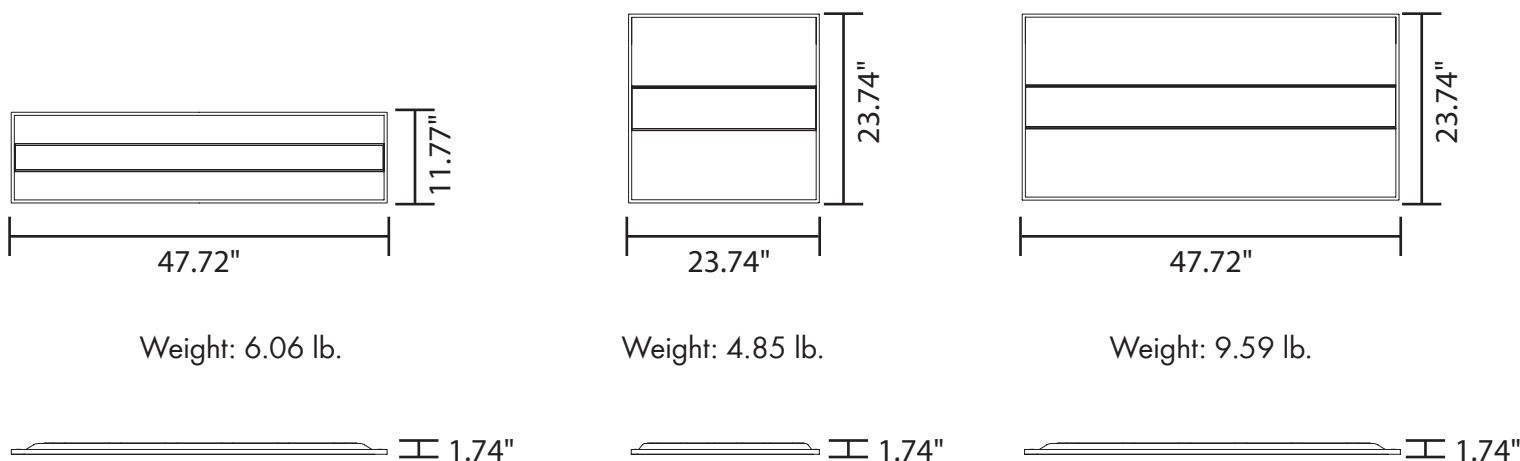

## LUMEN OUTPUT

SKU	Size (LxW)	Wattage (W)	Delivered Lumens (lm)	Efficacy (lm/W)	Delivered Lumens (lm)	Efficacy (lm/W)	Delivered Lumens (lm)	Efficacy (lm/W)
CT-14WS-C-U	1'x4'	25/30/35	2750 (25W)	110	3300 (30W)	110	3850 (35W)	110
CT-22WS-C-U	2'x2'	25/30/35	2750 (25W)	110	3300 (30W)	110	3850 (35W)	110
CT-24WS-C-U	2'x4'	30/40/50	3300 (30W)	110	4400 (40W)	110	5500 (40W)	110

## ACCESSORIES



High Voltage  
Emergency Battery  
Backup (8W)  
[Factory Installed]  
(Option)  
[90008-H]



Bodine Inverter  
10W  
(Option)  
[ELIS10CDF]



Emergency  
Inverter 12W  
(Option)  
[WP-CEP-12C-200VPE1]



T-Bar Emergency  
Battery Bracket  
(Option)  
[T-BR-EM]