

**Outdoor Wall Mount Fixture**

**Surface Mount**



**DESCRIPTION**

The Outdoor Wall Sconce Fixture replaces traditional incandescent outdoor lighting. The luminaire provides an excellent performance while providing a consistent color with same light quality as an incandescent light.

**APPLICATIONS**

Hospitality, Schools, landscaping, and Residential

**FEATURES**



**Outdoor Wall Mount Fixture**  
10", 14W (1,080 lm)  
Projected L70: 50,000 hours  
Warranty: 5 Years  
System Efficacy: 75 LpW

**Construction**

Die-cast aluminum housing with powder coated paint.

**Electrical**


Input Voltage: 120VAC

**Optical System**

Frosted PC lens 95° beam angle provides an even and comfortable diffusion of illumination.

**Installation/ Mounting**

Surface Mount (Wall) (4" J - box or Octagon J-box)




**Warranty**

5 Year Warranty.  
See warranty documentation for more information.

**Controls/Dimming**

Triac Dimming

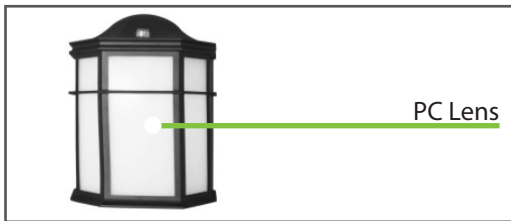

**Ordering Information**

**EXAMPLE: OWF-1014-40-BK-D**

Series	Size/Wattage	CCT	Finish	Dimming Option
OWF- Outdoor Wall Mount Fixture	1014 - 10", 14W	27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K 50 - 5000K	BK- Black	D - Triac Dimming

Specifications and Dimensions subject to change without notice.

\*MOQ and longer lead times may apply, please contact customer service for more information.


## Performance Information

Input Voltage	120VAC
Input Frequency	60Hz
Wattage	See Performance Table
Delivered Lumens	See Performance Table
System Efficacy	See Performance Table
CRI	>80
Available CCT	2700K, 3000K, 3500K, 4000K, 5000K
Projected L70	50,000+ hours
Power Factor	>0.9
THD	<20%
Dimming	Yes
Operating Temp.	-4°~113°F
IP Rating	Wet Location Rated

## Photometric Data

14W, 3000K


\*IES Available Upon Request

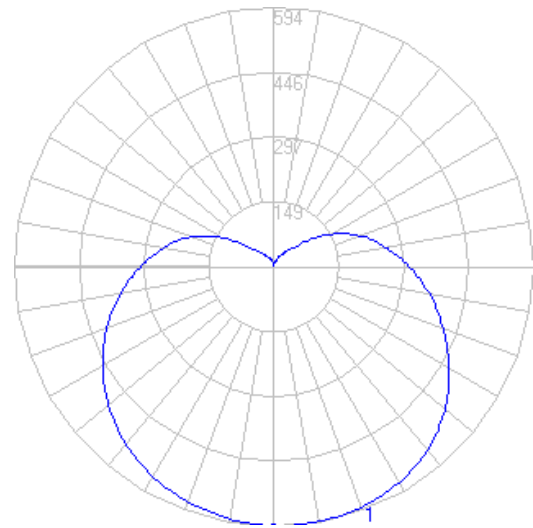

## Performance Table

SKU	Size (in)	Wattage (W)	3000K	
			Delivered Lumens (lm)	System Efficacy (lm/W)
OWF-1014-30-X	10	14	1050	75

## Product Dimensions

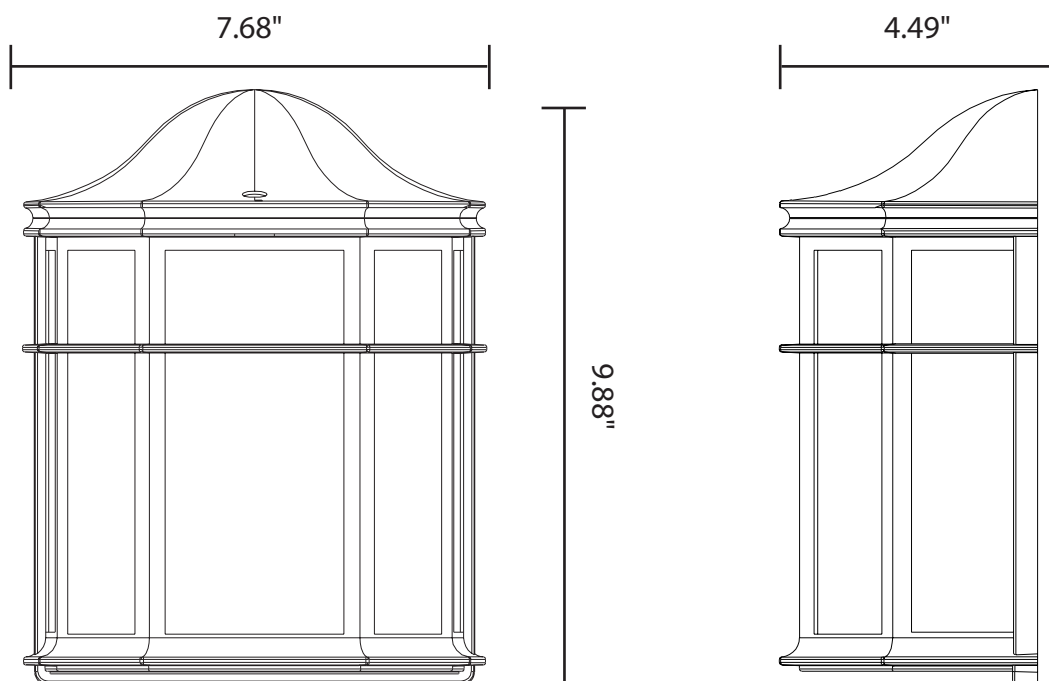

Weight: 1.88 lbs.