

KEGLEN TABLE

Designed by Big Ideas



Description

The table lamp's distinctive conical shade has a built-in curved diffuser. This ensures an attractive and glare-free downwardly directed light. The stem morphs into the diffuser shade, folding inward and creating a beautiful organic geometry. A gentle light is also emitted upward through a discreet uniform opening in the top of the shade to create a perfect ambiance.

Variants

VARIANT NUMBER	COLOR, RAL	W / H / L (IN) / W (LB)
5744166807	WHT, T08	6.9 / 17.3 / 6.9 IN / 3.3 LB
5744166810	BLK, T09	6.9 / 17.3 / 6.9 IN / 3.3 LB
5744166823	WHT, T08	6.9 / 17.3 / 6.9 IN / 1.5 LB
5744166836	BLK, T09	6.9 / 17.3 / 6.9 IN / 1.5 LB
5744167712	BLK, T09	6.9 / 17.3 / 6.9 IN / 1.5 LB
5744167725	WHT, T08	6.9 / 17.3 / 6.9 IN / 1.5 LB
5744167738	BLK, T09	6.9 / 17.3 / 6.9 IN / 3.3 LB
5744167741	WHT, T08	6.9 / 17.3 / 6.9 IN / 3.3 LB

Materials & Finishes

MATERIALS

Shade: Spun aluminum. Diffusor: Injection molded PC. Base and pin: machined aluminum.

FINISHES

louis poulsen

Black or white, matte, wet-painted.

Mounting

Cord type: White or black. Cord length: 10'. Switch: Button on the base. LED driver: Separate, plugs into power outlet. Optional fixed "pin" mount for Ø2.2" hole in desktop. For mounting instructions, see download section on the product detail page.

Information

With programming by the customer, there is a possibility to disable the switch.

An integrated memory function ensures that the lamp will return to its latest adjusted lumen output when power has been removed and restored.

Electrical:

System Wattage: 9W

LED Wattage: 8W

Delivered lumens: 383 - 513

Efficacy: 45 lm/W - 60 lm/W (LED)

Certifications:

cULus, Dry Location

Protection class IP20


Controllability: Continuous dimming by integrated button switch.

Color Rendering: $Ra \geq 90$


Dim-to-warm LED CCT: 2700K at 100%; 2000K at max dim For the E-socket product variants, bulbs are not included. LED light source is part of the product.

Light distribution diagrams


CARTESIAN

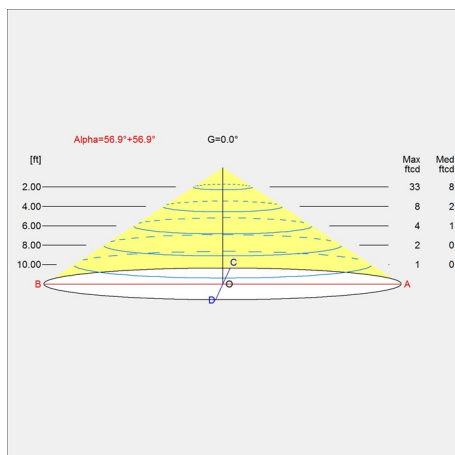

ISOLUX

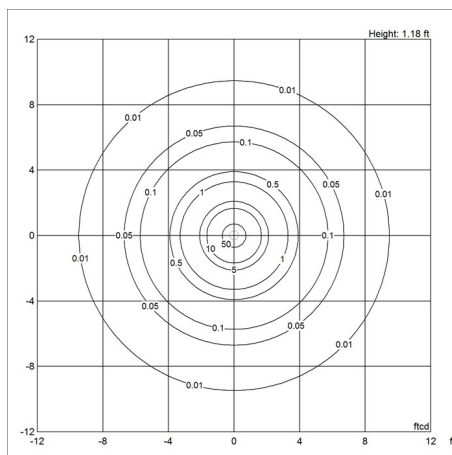

POLAR

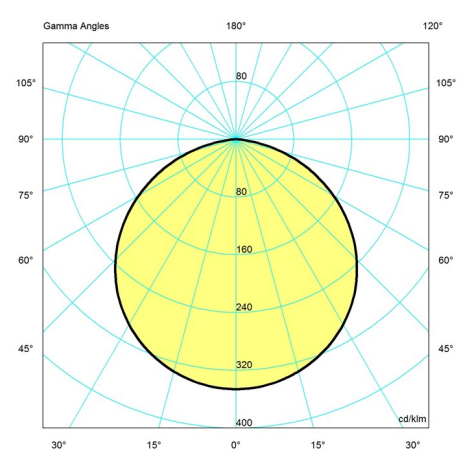

louis poulsen

Variant Options For particular variant options, please check our online Product Variants Configurator on the product detail page.

VARIANT NO.	LIGHT SOURCE	VOLTAGE/FRQ	LUMEN	FEATURES	CABLE
5744166807	LED 2700-2000K D2W 8.5W		485	-	With cord
5744166810	LED 2700-2000K D2W 8.5W		383	-	With cord
5744166823	LED 2700-2000K D2W 8.5W		485	-	With cord
5744166836	LED 2700-2000K D2W 8.5W		383	-	With cord
5744167712	LED 3000K 8.5W		405	-	With cord
5744167725	LED 3000K 8.5W		513	-	With cord
5744167738	LED 3000K 8.5W		405	-	With cord
5744167741	LED 3000K 8.5W		513	-	With cord
