

# LP ICON WALL

**Project name:**

**Project type:**

**Notes:**



## Design

Mads Odgård

## Product description

Wall arm mounted illuminated domed fixture, which provides a moon-like glow while providing excellent downlight distribution. Internal reflector is adjustable to provide Type III to Type II distribution. The asymmetric LED optic design aims LED's into the recessed reflector and provides a gentle indirect distribution. Reflector is available in matte or polished finish.

## Variant options

**Light source**

LED 3000K 76W  
LED 4000K 76W

**Lumen**

7029  
7267

**Voltage frequency**

120-277V/60HZ

## Light description

The fixture provides mainly direct downward illumination. The shade is lit up from within and creates a soft diffuse upwards light. Depending on the choice of reflector, the downward lighting characteristics will vary. The reflector types have been designed in two variations to provide either reduced glare with matte reflector or higher delivered lumens with polished reflector.

## Mounting

Surface: Anchored directly to the wall, centered over junction box. Three mounting holes 0.37 IN diameter on bolt circle 9.7 IN diameter at 120°. Mounting hardware by others.

## Information

Electrical:

System Wattage: 76 W

LED Wattage: 73 W

Delivered lumens: 7,029 - 7,449

Efficacy: 92.4 - 98.0 lm/W

Certifications:

cULus, Wet Location

Protection class IP65

IK class 06

BUG Rating: B1-U2-G1

Controllability: 0-10V Dimming Min.-Max. Ambient Temp: -20°C to +70°C

Color Rendering: Ra≥80 Wind Load EPA: 1.4 sq ft


## Finish

Natural paint aluminum


## Light distribution diagrams

For the full data set on all variants, see [louispoulsen.com](http://louispoulsen.com).


Cartesian

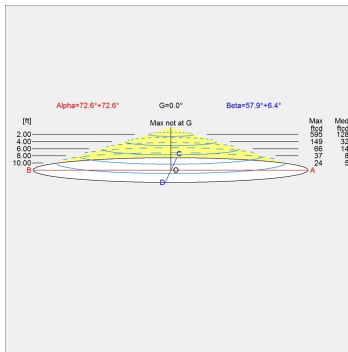


Isolux

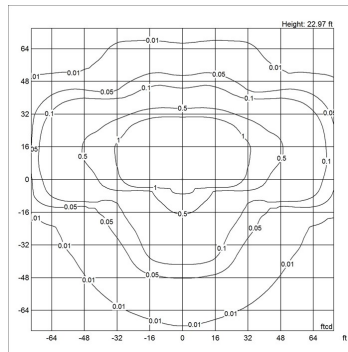

Polar

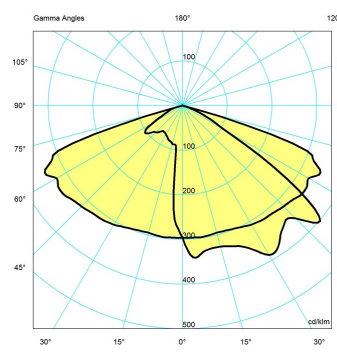

Bug

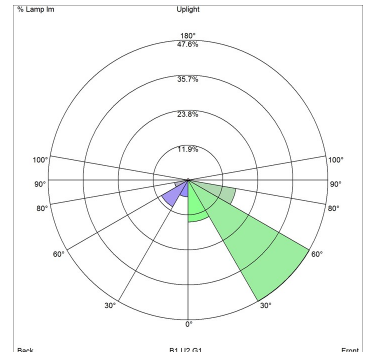

Gamma Angles

% Lamp In

## Variant options

| Light source  | Lumen | Voltage frequency | Variant number |
|---------------|-------|-------------------|----------------|
| LED 3000K 76W | 7029  | 120-277V/60HZ     | 10000159830    |
| LED 4000K 76W | 7267  | 120-277V/60HZ     | 10000159831    |