


## OE QUASI LIGHT

Designed by Olafur Eliasson

---

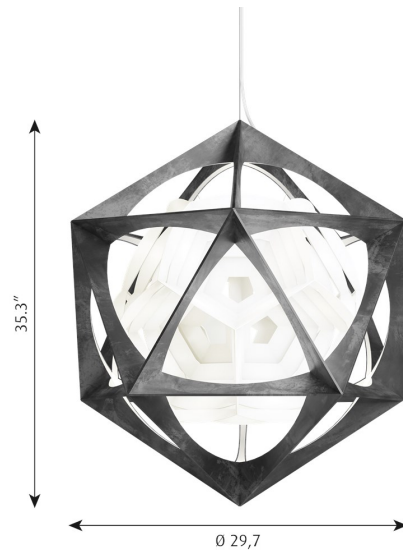

---

### Description

The pendant has 12 LEDs embedded in the inner vertices of the geometric frame that are connected to light guides along the inner edges, creating an even illumination towards the reflector in the center of the lamp. This layered white core reflects the light spherically back into the room, resulting in glare-free and uniform light.

---

### Variants

VARIANT NUMBER	COLOR, RAL	W / H / L (IN) / W (LB)
10000149807	DARK ALUMINIUM	31.7 / 35.3 / 31.7 IN / 48.5 LB
10000149808	DARK ALUMINIUM	31.7 / 35.3 / 31.7 IN / 5.4 LB

---

### Materials & Finishes

#### MATERIALS

Frame: Aluminum. Reflector: Injection molded polycarbonate

#### FINISHES

Clear lacquered, pickled aluminum. Matte white reflector.

---

# louis poulsen

## Mounting


Suspension type: 1x stainless steel aircraft cable. Canopy: White. Cord type: 2-conductor, 18 AWG white PVC power cord. Cord length: 12'. For mounting instructions, see download section on the product detail page.

## Information


Electrical:  
System Wattage: 118W  
LED Wattage: 109 W  
Delivered lumens: 2,950 - 3,085  
Efficacy: 25.0 lm/W - 26.1 lm/W  
Certifications:  
cULus, Damp Location  
Protection class IP20  
Controllability: 0-10V Dimming  
Color Rendering: Ra $\geq$ 90 For the E-socket product variants, bulbs are not included. LED light source is part of the product.

## Light distribution diagrams


### CARTESIAN

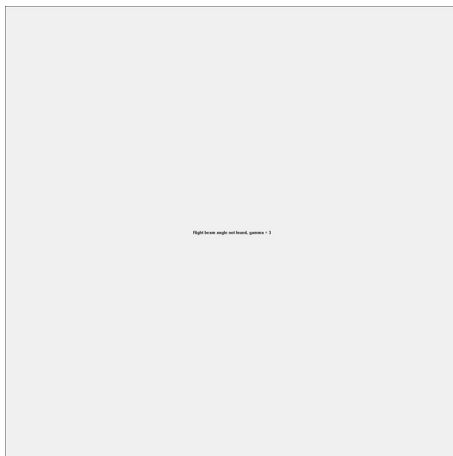

### ISOLUX

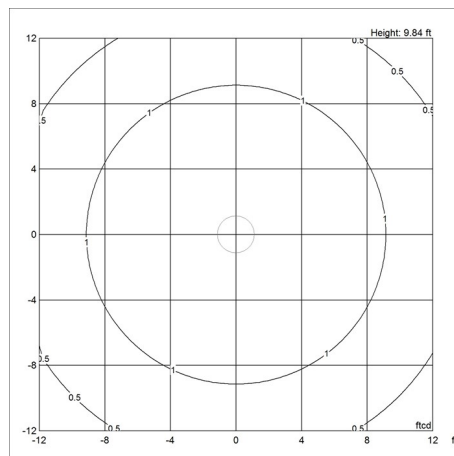

### POLAR

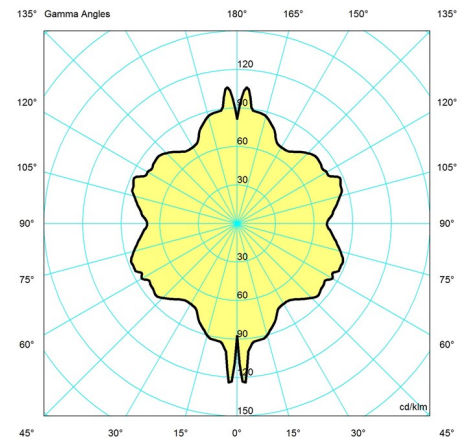

## Variant Options

For particular variant options, please check our online Product Variants Configurator on the product detail page.

VARIANT NO.	LIGHT SOURCE	VOLTAGE/FRQ	LUMEN	FEATURES	CABLE
10000149807	LED 2700K 118W	120-277V/60HZ	2950	Dim 0-10v	-
10000149808	LED 3000K 118W	120-277V/60HZ	3085	Dim 0-10v	-