


## TOLDBOD 6.1 BOLLARD

Designed by Louis Poulsen A/S

---

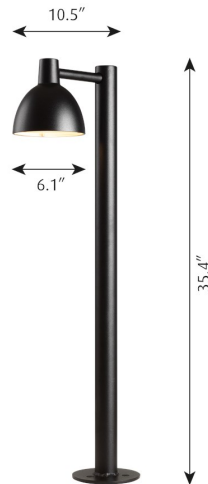

---

### Description

The light is directed 100% downwards and the shade has a matte white painted interior emitting a soft, diffused, comfortable light.

---

### Variants

VARIANT NUMBER	COLOR, RAL	W / H / L (IN) / W (LB)
5747916449	BLK, 723	- / - / - IN / 5.4 LB
5847901402	BLK, 723	6.1 / 35.4 / 10.5 IN / 5.0 LB

---

### Materials & Finishes

#### MATERIALS

Shield: Tempered sand blasted glass. Luminaire head: Die cast aluminum. Post: Extruded aluminum. Base plate: Aluminum.

#### FINISHES

Black, powder coated.

---

### Mounting

Base plate dimension: 6" diameter. Base plate: Mounted to a concrete base with 3 anchor bolts on a bolt circle of 3.54" diameter. Installation: Refer to mounting instruction download

---


for installation details. For mounting instructions, see download section on the product detail page.

## Information


Electrical:  
 Maximum Lamp Wattage: 60W  
 Delivered lumens: 661 lm  
 Efficacy: 3.0 lm/W  
 Certifications:  
 cULus, Wet Location  
 Protection class IP44  
 IK class 05  
 BUG Rating: B0-U1-G0  
 Controllability: Phase dimming. For the E-socket product variants, bulbs are not included. LED light source is part of the product.

## Light distribution diagrams


**CARTESIAN**




**ISOLUX**

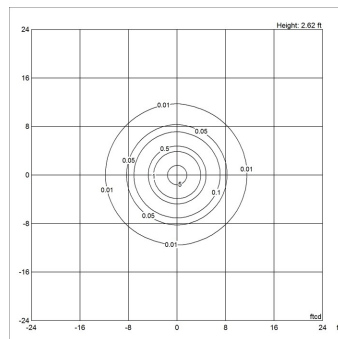

**POLAR**



**BUG**

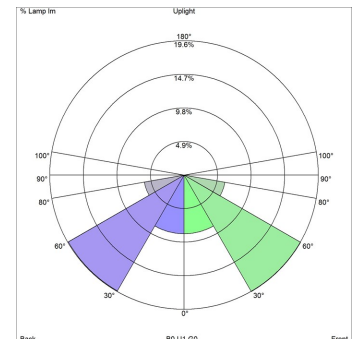

## Variant Options

For particular variant options, please check our online Product Variants Configurator on the product detail page.

VARIANT NO.	LIGHT SOURCE	VOLTAGE/FRQ	LUMEN	FEATURES	CABLE
5747916449		120V		-	-
5847901402	1x40W G16.5/IF Candelabra US	120V	193	-	-