# louis poulsen

## YUH TABLE

Designed by GamFratesi



### Description

The fixture primarily provides glare-free downward directed light. The angle of the shade can be adjusted to optimize light distribution. A slim opening in the top of the shade provides soft, ambient upward illumination. A mechanical system provides great freedom of movement, so the light can always be set in the ideal position in the workspace, living room etc. Built-in LED technology provides a high quality of light with stepless dimming from 100% to 15%. Optional timer capability automatically turns off the light after a chosen duration of 4 or 8 hours. Returns to the last dim level setting when switched on. A button at the top of the tube acts as switch and dimmer.

#### Variants

5744162652 5744162665 5744612555 5744612568

VARIANT NUMBER

### COLOR, RAL

BRASS/BLACK BRASS/WHITE BLK, T09 WHT, T08

#### W / H / L (IN) / W (LB)

7.9 / 24 / 7.9 IN / 6.7 LB 7.9 / 24 / 7.9 IN / 6.7 LB 7.9 / 24 / 7.9 IN / 7.9 LB 7.9 / 24 / 7.9 IN / 7.9 LB

Materials & Finishes

#### MATERIALS

Shade: Die cast aluminum. Base: Die cast aluminum (wet painted) or brushed marble. Marble: Italian Nero Margiua or White Carrara. Stem: Extruded brass (wet painted or clear

# louis poulsen


lacquered).

#### FINISHES

White or black: Matte wet painted. Brass/Marble versions: White or black shade matte wet painted. . Brushed brass stem, clear lacquered. Matte marble base.

Mounting Cord type: White or black. Cord length: 10'. Switch: High/low/off switch on the base. LED driver: Separate, plugs into power outlet. For mounting instructions, see download section on the product detail page.

### Light distribution diagrams

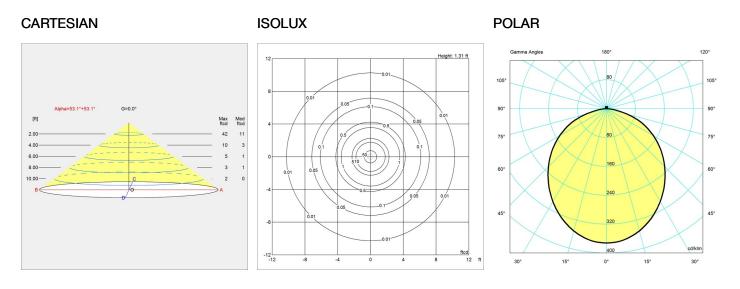

Variant Options	For particular variant options, please check our online Product Variants Configurator on the
	product detail page.

VARIANT NO.	LIGHT SOURCE	VOLTAGE/FRQ	LUMEN	FEATURES	CABLE
5744162652	LED 2700K 10W	120V	446	-	-
5744162665	LED 2700K 10W	120V	446	-	-
5744612555	LED 2700K 10W	120V	446	-	-
5744612568	LED 2700K 10W	120V	446	-	-